




陶瓷气体放电管 Ceramic Gas Discharge Tube

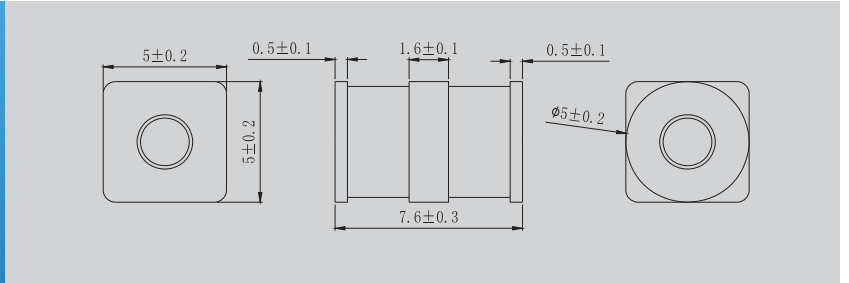

目录编号 Catalog No.	直流击穿电压 DC Spark Over Voltage (100v/s) V	冲击击穿电压 Impulse Spark Over Voltage (1kv/ μ s) V	绝缘电阻 Insulation Resistance G Ω	极间电容 Electrode Capacitance 1MHz 0.5V PF	耐短波电流 Impulse Discharge Current (8/20 μ s 10 times)	耐交流电流 AC Discharge Current (50Hz 1s 10 times) A
5TS075L	075 \pm 20%	\leq 600	\geq 1	\leq 1.5	5KA	5A
5TS090L	090 \pm 20%	\leq 600	\geq 1	\leq 1.5	5KA	5A
5TS150L	150 \pm 20%	\leq 600	\geq 1	\leq 1.5	5KA	5A
5TS230L	230 \pm 20%	\leq 700	\geq 1	\leq 1.5	5KA	5A
5TS350L	350 \pm 20%	\leq 1000	\geq 1	\leq 1.5	5KA	5A
5TS420L	420 \pm 20%	\leq 1000	\geq 1	\leq 1.5	5KA	5A
5TS470L	470 \pm 20%	\leq 1200	\geq 1	\leq 1.5	5KA	5A
5TS600L	600 \pm 20%	\leq 1400	\geq 1	\leq 1.5	5KA	5A
5TS800L	800 \pm 20%	\leq 1600	\geq 1	\leq 1.5	5KA	5A

- 参考执行标准: ITU-T K.12, GB/T9043-2008 《通信设备过电压保护用气体放电管通用技术条件》。

Reference executive standard: ITU-T K.12, GB/T9043-2008 《General Technical Requirements of Gas Discharge Tubes for the Over-voltage protection of telecommunications installations》.

- 耐交流 (50 Hz) 电流最大 5A, 试验时交流电压应大于直流击穿电压上限值。

The maximum AC withstand current (50 Hz) is 5 A and AC voltage shall be larger than the upper limit value of DC spark-over voltage during the test.

- 极间电容测试频率为1MHz, 测试电压为0.5V。

The electrode capacitance test frequency is 1MHz and test voltage is 0.5V.

工作与储存温度 Operating and Storage temperature

-40°C ~ +85°C

包装 Packaging

产品采用吸塑盒包装, 100PCS/盒, 每包装箱装4000PCS

Automaton taped 100PCS per reel,4000PCS per carton

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Gas Discharge Tubes - GDTs / Gas Plasma Arrestors](#) category:

Click to view products by [lanson](#) manufacturer:

Other Similar products are found below :

[PMT1023004](#) [PMT1025001](#) [PMT1035004](#) [PMT1040004](#) [PMT809006](#) [CG2250](#) [CG2800](#) [CG31.5L](#) [GT-SMD181240012-TR](#) [WPGT-2N145B6L](#) [WPGT-2N230B6L](#) [WPGT-2N470B6L](#) [WPGT-2R470B6L](#) [WPGT-2RM230A6L](#) [WPGT-2RM350A6L](#) [WPGT-2RM70A6L](#) [WPGT-2RM90A6L](#) [WPGT-2S145](#) [WPGT-2S350](#) [WPGT-2S470](#) [WPGT-3R350CF](#) [WPGT-3R350G1](#) [WPGT-3R90G1](#) [WPGT-3R75G1](#) [WPGT-3R470G1](#) [WPGT-3R250C](#) [WPGT-3R230G1](#) [WPGT-2S230](#) [WPGT-2RM470A6L](#) [WPGT-2RM145A6L](#) [WPGT-2R3000B8L](#) [WPGT-2R2700B8L](#) [WPGT-2R1000B8L](#) [WPGT-2N90B6L](#) [WPGT-2N70B6L](#) [WPGT-2N350B6L](#) [WPGT-2N230B6L1](#) [CG90](#) [CG2230](#) [CG2145](#) [CG21000](#) [GT-SMD181215012-TR](#) [T61-C350X](#) [9071.99.0547 \(73_Z-0-0-547\)](#) [B88069X6940B152](#) [9071.99.0052\(73_Z-0-0-52\)](#) [B88069X1973T902](#) [A9L15692](#) [C50-0-255](#) [A9L16294](#)