



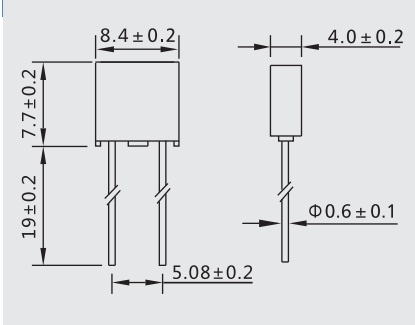

微型保险丝(延时型)

Micro Fuse (Time-Lag) 400V/300V/250V

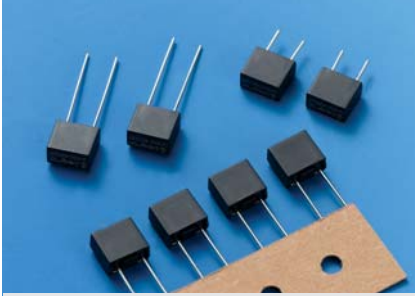

测试标准:
Testing Standard:
 IEC60127-1 IEC60127-3 GB9364.1 GB9364.3

额定分断能力:
Interrupting Rating:
 35A or 10In Whichever is greater


工作温度:
Operating Temperature:
 -55°C ~ +125°C

材料:
Materials:
 Case:thermoplastic nylon
 Base:thermoplastic nylon
 Lead wire:tinned copper wire

焊接方法:
Soldering Method:
 Wave soldering: 260°C, 10s max
 Manual soldering: 370°C, 5s max

Time-Current Characteristics

电流-时间曲线图

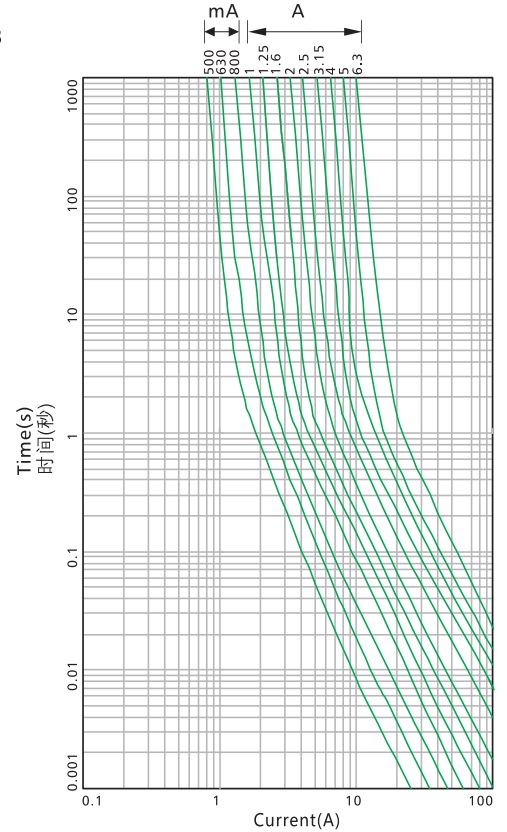

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time (100mA~6.3A)	熔断时间 Opening Time (8A~10A)
210%	2 min Max(小于2分钟)	5 min Max(小于5分钟)
275%	400 ms~10 s	1 s~20 s
400%	150 ms~3 s	150 ms~3 s
1000%	20 ms~150 ms	20 ms~150 ms

目录编号: Catalog No.T:400V G:300V A:250V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² Melting Integral (A ² .S)	认证 Approvals							
					UL US	DVE	VDE	CQC	S	PS E JET	KC	
SMT0100T/G/A	100mA	400V/300V/250V	350	0.06	●							
SMT0125T/G/A	125mA	400V/300V/250V	300	0.08	●	○		○				
SMT0160T/G/A	160mA	400V/300V/250V	280	0.1	●	○		○				
SMT0200T/G/A	200mA	400V/300V/250V	260	0.2	●	○		○				
SMT0250T/G/A	250mA	400V/300V/250V	240	0.3	●	○		○				
SMT0400T/G/A	400mA	400V/300V/250V	200	0.5	●	○		○				
SMT0500T/G/A	500mA	400V/300V/250V	190	0.9	●	●		●	●		●	
SMT0630T/G/A	630mA	400V/300V/250V	180	1.2	●	●		●	●		●	
SMT0800T/G/A	800mA	400V/300V/250V	160	3.9	●	●		●	●		●	
SMT1100T/G/A	1A	400V/300V/250V	140	5.8	●	●		●	●	●	●	
SMT1125T/G/A	1.25A	400V/300V/250V	130	12.8	●	●		●	●	●	●	
SMT1160T/G/A	1.6A	400V/300V/250V	120	14.7	●	●		●	●	●	●	
SMT1200T/G/A	2A	400V/300V/250V	100	21.9	●	●		●	●	●	●	
SMT1250T/G/A	2.5A	400V/300V/250V	100	42.6	●	●		●	●	●	●	
SMT1315T/G/A	3.15A	400V/300V/250V	100	72	●	●		●	●	●	●	
SMT1400T/G/A	4A	400V/300V/250V	100	83.2	●	●		●	●	●	●	
SMT1500T/G/A	5A	400V/300V/250V	100	148	●		●	●	●	●	●	
SMT1630T/G/A	6.3A	400V/300V/250V	100	195	●		●	●	●	●	●	
SMT1800T/G/A	8A	400V/300V/250V	80	215	●		○	○				
SMT2100T/G/A	10A	400V/300V/250V	75	250	●		○	○				
SMT2120T/G/A	12A	400V/300V/250V	-	272	●							
SMT2150T/G/A	15A	400V/300V/250V	-	300	●							

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuses with Leads - Through Hole](#) *category:*

Click to view products by [lanson](#) *manufacturer:*

Other Similar products are found below :

[89096-013](#) [89096-015](#) [203004](#) [252001](#) [252010](#) [25202.5](#) [252.062](#) [263.500](#) [265.750](#) [272.005](#) [273.600V](#) [274.250](#) [SR-5H-5A-BK](#) [SS-5-800MA-AP](#) [SS-5F-3.15A-AP](#) [252004](#) [263.750](#) [273.005](#) [3701630000](#) [LKB-3](#) [0473004.MAT1L](#) [RST 2-BULK](#) [0473001.HAT1L](#) [0473002.HAT1L](#) [0473.500HAT1L](#) [SS-5-1.6A-AP](#) [SS-5F-2.5A-AP](#) [SR-5H-2.5A-AP](#) [SS-5-6.3A-BK](#) [SR-5H-4A-AP](#) [RST 5-AMMO](#) [SR-5H-3.15A-BK](#) [SR-5H-2A-BK](#) [RSTA 2 AMMO](#) [89096-005](#) [SR-5F-1-6A-BK](#) [SS-5FH-3.15A-AP](#) [SS-5-630MA-AP](#) [047301.5HAT1L](#) [3721100041](#) [SS-5H-1-25A-APH](#) [SR-5H-800MA-APH](#) [0034.722](#) [34.732](#) [22D03-200](#) [GFA-4](#) [0697A8000-01](#) [0697A9100-01](#) [008307X](#) [008313C](#)