





# SRT RoHS Compliant



## 微型保险丝(延时型)

### Micro Fuse (Time-Lag) 250V

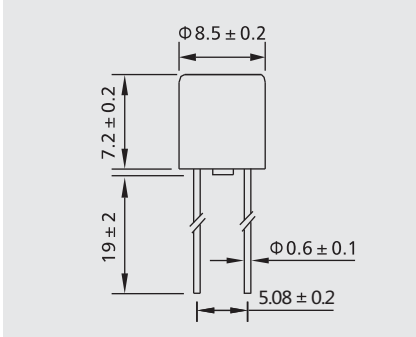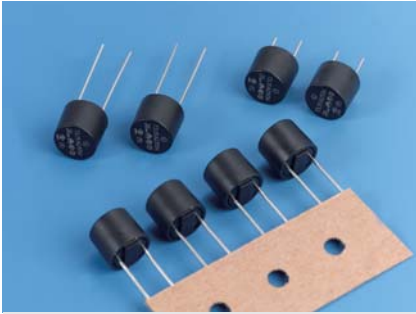

测试标准:  
**Testing Standard:**  
 IEC60127-1 IEC20167-3 GB9364.1 GB9364.3


额定分断能力:  
**Interrupting Rating:**  
 35A or 10In Whichever is greater

工作温度:  
**Operating Temperature:**  
 -55°C ~ +125°C

材料:  
**Materials:**  
 Case:thermoplastic nylon  
 Base:thermoplastic nylon  
 Lead wire:tinned copper wire

焊接方法:  
**Soldering Method:**  
 Wave soldering: 260°C, 10s max  
 Manual soldering: 370°C, 5s max

Time-Current Characteristics  
 电流-时间曲线图

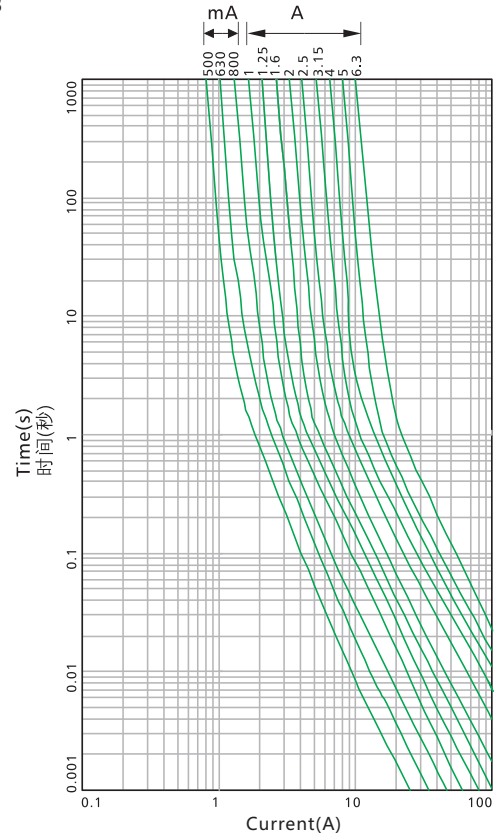

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
210%	2 min Max(小于2分钟)
275%	400 ms~10 s
400%	150 ms~3 s
1000%	20 ms~150 ms

目录编号: Catalog No.A:250V.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 <sup>2</sup> T Melting Integral (A <sup>2</sup> .S)	认证 Approvals						
					UL US	VDE	CCC	CQC	PS E JET	K	
SRT0250A	250mA	250V	240	0.2	●	●	●	●	●	●	●
SRT0315A	315mA	250V	220	0.3	●	●	●	●	●	●	●
SRT0400A	400mA	250V	200	0.5	●	●	●	●	●	●	●
SRT0500A	500mA	250V	190	0.9	●	●	●	●	●	●	●
SRT0630A	630mA	250V	180	1.2	●	●	●	●	●	●	●
SRT0800A	800mA	250V	160	3.9	●	●	●	●	●	●	●
SRT1100A	1A	250V	140	5.8	●	●	●	●	●	●	●
SRT1125A	1.25A	250V	130	12.8	●	●	●	●	●	●	●
SRT1160A	1.6A	250V	120	14.7	●	●	●	●	●	●	●
SRT1200A	2A	250V	100	21.9	●	●	●	●	●	●	●
SRT1250A	2.5A	250V	100	42.6	●	●	●	●	●	●	●
SRT1315A	3.15A	250V	100	72	●	●	●	●	●	●	●
SRT1400A	4A	250V	100	83.2	●	●	●	●	●	●	●
SRT1500A	5A	250V	100	148	●	●	●	●	●	●	●
SRT1630A	6.3A	250V	100	195	●	●	●	●	●	●	●

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuses with Leads - Through Hole](#) category:*

*Click to view products by [lanson](#) manufacturer:*

Other Similar products are found below :

[89096-013](#) [89096-015](#) [203004](#) [252001](#) [252010](#) [25202.5](#) [252.062](#) [263.500](#) [265.750](#) [272.005](#) [273.600V](#) [274.250](#) [SR-5H-5A-BK](#) [SS-5-800MA-AP](#) [SS-5F-3.15A-AP](#) [252004](#) [263.750](#) [273.005](#) [3701630000](#) [LKB-3](#) [0473004.MAT1L](#) [RST 2-BULK](#) [0473001.HAT1L](#) [0473002.HAT1L](#) [0473.500HAT1L](#) [SS-5-1.6A-AP](#) [SS-5F-2.5A-AP](#) [SR-5H-2.5A-AP](#) [SS-5-6.3A-BK](#) [SR-5H-4A-AP](#) [RST 5-AMMO](#) [SR-5H-3.15A-BK](#) [SR-5H-2A-BK](#) [RSTA 2 AMMO](#) [89096-005](#) [SR-5F-1-6A-BK](#) [SS-5FH-3.15A-AP](#) [SS-5-630MA-AP](#) [047301.5HAT1L](#) [3721100041](#) [SS-5H-1-25A-APH](#) [SR-5H-800MA-APH](#) [0034.722](#) [34.732](#) [22D03-200](#) [GFA-4](#) [0697A8000-01](#) [0697A9100-01](#) [008307X](#) [008313C](#)