

NETWORK CONNECTIVITY FOR ANY SERIAL DEVICE 'RIGHT ON THE WIRE'

xDirect™ is a sleek and compact Serial-to-Ethernet device server, providing quick and easy Ethernet connectivity to virtually any device or machine with a serial interface.

With an integrated Ethernet port and serial cable, multiple power options including PoE, and an industry-best five year warranty, xDirect provides a portable, extremely flexible, and highly affordable network connectivity solution in the market.

xDirect comes with a built-in web server that enables users to access and configure the unit using a standard web browser on a PC, smartphone, or tablet from anywhere.

With plug-and-play simplicity, small form factor, multiple power options, and a robust device server application, xDirect provides the easiest and shortest path to network connectivity 'right on the wire'.



xDirect Highlights:

- Complete Network Connectivity Solution
- Integrated 10/100 Ethernet Port and Serial Cable
- Complete Device Server Application with Full IP Stack and Web Server
- Space Saving Form Factor
- Serial Data Rate of up to 921.6 Kbps
- 128/192/256-bit AES Encryption
- Flexible Power Options including PoE
- Extended Temperature Range of -40° to 85°C
- 5-year Limited Warranty

Features and Specifications

> Serial Interface

- Modes: RS232, RS422* or RS485* (2 and 4 wire support)
- Baud Rate: 300bps to 921.6 Kbps
- Characters: 7 or 8 data bits
- Stop Bits: 1 or 2
- Parity: Odd, even, more
- Control Signals: CTS/RTS (Hardware)
- Flow Control: CTS/RTS, XON/XOFF

*Available on xDirect485 & PoE models

> Serial Connectors

- Single-port: DB9F (DCE Pinned)

> Ethernet Interface

- Interface: 10Base-T/100Base-T (Auto-sensing)
- Speed: 10/100 Mbps
- Connector: RJ45
- Protocols: UDP, TCP, ARP, Telnet, ICMP, SNMP, DHCP, BOOTP, TFTP, Auto IP, HTTP, RFC2217

> LED Indicators

- Power/Status, Link, Activity, Serial RX Activity & TX Activity

> Processor


- CPU: Based on DSTni-EX Enhanced 16-bit x86 Architecture
- Memory: 256 KB SRAM, 1 MB Flash

> Power Requirements

- Input Voltage: 5V at mini-USB-B jack
- Input Voltage: 5-15 VDC at DB9F pin 9
- Power Consumption: 1.3W max w/o PoE, 2.0W max with PoE

> Form Factor

- Dimensions:

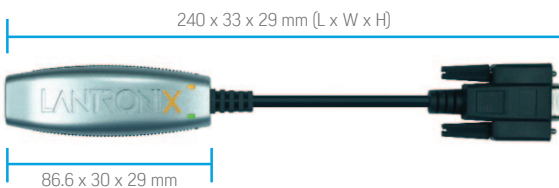

- Weight: 0.068 Kg (0.15 lbs)

> Shipping Dimensions

- 180 x 130 x 53 mm (LxWxH)

> Environmental Limits

- Operating Temperature**
 - 40° to 85° C (-40° to 185° F), non-PoE models
 - 40° to 70° C (-40° to 158° F), PoE model
- Storage Temperature: -40° to 85° C (-40° to 185° F)
- Relative Humidity: 0% to 90% non-condensing

> Software

- Windows 7/Vista/XP/2008 Server/2003 Server (32-bit and 64-bit versions), DeviceInstaller™ configuration software, Com Port Redirector software and related utilities
- Configuration Options: Web Browser, Telnet Client, Serial Terminal

> Security

- 128/192/256-bit AES Encryption

> Isolation and Protection

- Serial Port: 15 KV ESD protection on RS232 and RS422/485 transceivers
- Ethernet Port: 1500 VAC isolation shielded
- PoE: 1500 VAC isolation

> Regulatory Approvals

• Emissions

FCC Part 15, Subpart B, Class B
EN55022, Class B
EN61000-3-2, EN61000-3-3
ICES-003 Issue 4
AS/NZS CISPR22

• Immunity

EN55024
EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5,
EN61000-4-6, EN61000-4-8, EN61000-4-11

• Agency Approvals

UL 60950-1, 2nd Edition
CAN/CSA C22.2 No. 60950-1-07, 2nd Edition
CE
VCCI
C-Tick
IEC 60950-1 2005, 2nd Edition

> Warranty

- 5-year Limited

Ordering Information

United States

Call: 800.422.7055

Email: sales@lantronix.com

Buy Online: <http://www.lantronix.com>

Europe

Call: +31 (0) 76.52.3.6.74 4

Email: EMEA@lantronix.com

Asia/Pacific

Call: +852 3428.2338

Email: asiapacific_sales@lantronix.com

Japan

Call: +81.3.6277.8802

Email: japan_sales@lantronix.com

> Part Number

XDT2321002-01-S

XDT4851002-01-S

XDT10P0-01-S

> Description

xDirect232 Single Port RS232 10/100 Device Server, 100-240 VAC International Power Supply with Regional Adapters, RoHS

xDirect485 Single Port RS232/422/485 10/100 Device Server, 100-240 VAC International Power Supply with Regional Adapters, RoHS

xDirect PoE Single Port RS232/422/485 10/100 Device Server, No Power Supply, RoHS

> Accessories

140-448-R

520-125-R

520-120-R

520-121-R

520-122-R

520-123-R

> Description

Mini DB9M-M Gender Changer, Null Modem with Pin 9, RoHS

Power Supply, Slim Wall Cube, 5VDC 1A, Mini USB-B Right Angle, 4 Regional Adapters, Level V, RoHS

Power Supply, Slim Wall Cube, 5VDC 1A, -40°C to 75°C, Mini USB-B Right Angle, US/CAN/JP, RoHS

Power Supply, Slim Wall Cube, 5VDC 1A, -40°C to 75°C, Mini USB-B Right Angle, EU, RoHS

Power Supply, Slim Wall Cube, 5VDC 1A, -40°C to 75°C, Mini USB-B Right Angle, UK, RoHS

Power Supply, Slim Wall Cube, 5VDC 1A, -40°C to 75°C, Mini USB-B Right Angle, AUS, RoHS



**The xDirect is UL rated to 75° C. The included power supply has an operating temperature range of 0° to 40° C. Extended temperature power supplies are available (refer to Ordering Information section).

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Servers](#) category:

Click to view products by [Lantronix](#) manufacturer:

Other Similar products are found below :

[70002259](#) [70002261](#) [VESR321-ML](#) [NBLM-LM1CR](#) [EKI-1528TI-VDC-CE](#) [ADAM-4570L-DE](#) [ADAM-4571-CE](#) [XPC100200S-01](#) [ESP904](#)
[96NIC-10G2P-IN](#) [ADAM-4570-CE](#) [ADAM-4571L-DE](#) [AGS-913I-R11A1E](#) [EKI-1361-MB-BE](#) [EKI-1362-BE](#) [EKI-1362-MB-BE](#) [EKI-1522-](#)
[CE](#) [EKI-1526-CE](#) [EKI-1526I-CE](#) [EKI-1528-CE](#) [ABDN-ER-IN5018](#) [ESP901](#) [ESP902](#) [ESR901](#) [ESR904](#) [BB-VESR902T](#) [VESR902D](#)
[70002412](#) [70002263](#) [70002265](#) [70002269](#) [70002271](#) [70002277](#) [70002279](#) [70002281](#) [70002285](#) [70002404](#) [70002406](#) [70002410](#) [70002414](#)
[70002418](#) [ED1100002-01](#) [ED2100002-01](#) [ED41000P0-01](#) [ED41000P2-01](#) [PEN100100A-01-IT](#) [PXC2102G2-01](#) [SD2101002-11](#)
[UD1100002-01](#) [UD1100IA2-01](#)