



## THE ONLY INTELLIGENT EMBEDDED ETHERNET GATEWAY



XPort<sup>®</sup> EDGE is the only network communications engine for secure IoT connectivity and remote management that fits within a standard Ethernet connector. Requiring minimal engineering effort, the XPort EDGE allows device manufacturers to add fully integrated, secure Ethernet connectivity and control to their products in a few weeks.

### Advanced Security Features



Leverage a comprehensive suite of built-in device security software with minimal integration effort. Lantronix TruPort<sup>®</sup> Security offers instant access to key features such as secure boot, secure firmware updates, secure connections, data-at-rest protection for keys and configuration and role-based access control.

### Robust Data Connectivity



Reliably and securely communicate your device data with one or more applications on the local network or across the Internet. Utilize customer proven TruPort<sup>®</sup> Serial for transparent pass-through of hundreds of serial protocols or TruPort<sup>®</sup> Socket for multiple connections via TCP, UDP and HTTP(S) Server.

### Remote Management & Cloud Connectivity



Add scalable remote device management and data access to your applications via Lantronix MACH10<sup>®</sup> cloud software platform.

### Fastest Device Integration



Everything you need is included in the tiny RJ45 Ethernet connector package. Connect to any 8/16/32-bit microcontroller with a UART interface. Simplify your device application with fully offloaded network stack, robust security, connectivity and management software.

### Key Benefits:



Faster Time To Market



Lower TCO



Quickest Integration



Network & IoT Offload

### Highlights:

- Customer-proven Serial-to-Ethernet technology (TruPort<sup>®</sup> Serial and TruPort<sup>®</sup> Socket) for secure data communication
- Secure Boot, Secure Firmware Updates
- Built-in TruPort<sup>®</sup> Security for Data-at-Rest and Data-in-Motion Security
- Pre-Integration with MACH10<sup>®</sup> Software Platform for Remote Management and Application Integration
- SSL/TLS 1.2 with PKI and X.509 Certificate Management
- Secure Network Attach (EAPOL)
- Integrated RJ45 Ethernet Jack Magnetics, 10/100 Mbps PHY
- Industrial Operating Temperature Range (-40°C to + 85°C)

## Features and Specifications

### Data Communication

- TruPort® Serial Technology – TCP and UDP Server Mode, TCP and UDP Client Mode, Multi-host Connect; TLS Client and Server
- TruPort® Socket – Multi-host Client and Server Modes, HTTP(S) Server
- Authenticated SMTP Support – Send email directly from device
- Modbus TCP to Modbus RTU/ASCII gateway

### Security and Authentication

- TruPort® Security Software
  - Secure Boot, Secure Firmware-Over-the-Air (FOTA) Updates
  - Secure Key Storage, Encrypted Configuration
  - Secure Connections with SSL/TLS, HTTPS
  - Software Controlled Network Service Ports Enable/Disable
  - Role Based Access Control
  - IEEE 802.1X Network Access Control (EAPOL)
- SSLv3/TLS 1.2 with PKI and X.509 Certificates (up to 2048-bit Keys)
- TLS 1.2, AES (256-bit, 192-bit, 128-bit), up to 4096-bit RSA keys, SHA-2

### Management Interfaces

- Lantronix MACH10® IoT Software Platform
- Serial Port, Telnet, Internal Web Server (HTTP/HTTPS), SNMP
- Lantronix Device Discovery Protocol (L2CAP)
- Secure Firmware Upgrade via HTTP, MACH10®

### Protocol Support

- DHCP Client v4/v6, BOOTP
- Telnet Server, HTTP server
- IPv4/IPv6\*, TCP/IP, UDP/IP, ARP, ICMP, Auto-IP, DNS
- SNMP v1/v2
- IPv6

### Ethernet Specifications

- IEEE 802.3 MAC and PHY, 10BaseT and 100BaseT with Auto-MDIX
- Auto Negotiation; Full duplex and half duplex support
- Link Activity LED Indicators

### Serial Interface Specifications

- 1x UART (Serial) Ports
- CMOS (Asynchronous) 3.3V Level Signals
- Data Rates: 4Mbps (software selectable)
- Data Bits: 7 or 8; Stop Bits: 1 or 2; Parity: Odd, Even or None
- Control signals: DTR/DCD, RTS/CTS
- Flow Control: XON/XOFF (software), RTS/CTS (hardware), None

### Configurable I/Os

- Programmable I/O: up to 3 CPs
- I/O Voltage: 3.3V

### Architecture

- CPU: Cortex R4 up to 320 MHz
- Storage: 8MB SPI Flash; 1MB for FileSystem

### Power

- Input Voltage: 3.3VDC
- Current consumption: 160 mA (100-BaseT); 180 mA (10-BaseT)

### Environmental

- Operating Temp: -40°C to +85°C
- Storage Temp: -40°C to +85°C
- Storage Humidity: 5% to 95% relative humidity, non-condensing

### Dimensions

- Dimensions: 33.9 x 16.25 x 13.5 mm (1.33 x 0.64 x 0.53 in)
- Weight: 9.6g (0.34 oz)

### Packaging

- Tray: 50 units/tray (200 units Carton)
- Sample: 1 unit (Box)

### Developer Tools

- SDK available for download from Lantronix
- For more information, refer to:
  - [docs.lantronix.com/products/xport-edge/sdk](https://docs.lantronix.com/products/xport-edge/sdk)

### Certifications

- FCC, EU, Canada Class B emission/immunity and UL/CB 60950/62368 safety.
- IPv6
- For other certifications, please refer to the [XPort EDGE Data Sheet](#).



Gateway Central™



MACH10® Global Device Manager

### XPort EDGE® Evaluation Kit




RJ45 to RJ45 Cable



5V Power Supply



DB9F to DB9F Null Modem Cable

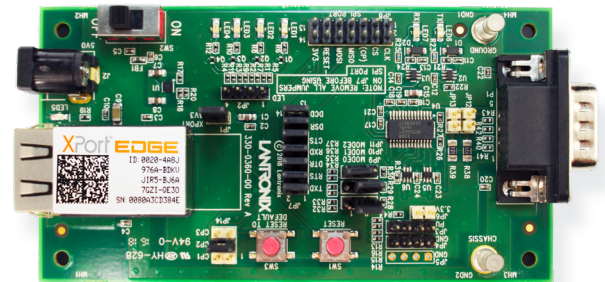

### Product Variants

Part Number	Description
XPE200100B	XPort EDGE Secure Embedded Ethernet Gateway, Bulk
XPE200100S	XPort EDGE Secure Embedded Ethernet Gateway, Sample
XPE200100EK	XPort EDGE Evaluation Kit

### Ordering Information

#### United States

 Call: 1.800.422.7055  
[sales@lantronix.com](mailto:sales@lantronix.com)

#### Europe

 Call: +31 (0) 76.52.3.6.74.4  
[emea@lantronix.com](mailto:emea@lantronix.com)

#### Asia/Pacific

 Call: +852 3955 0218  
[asiapacific\\_sales@lantronix.com](mailto:asiapacific_sales@lantronix.com)

#### Japan

 Call: +81.0 50 1354 6201  
[sales\\_japan@lantronix.com](mailto:sales_japan@lantronix.com)


## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Gateways category](#):*

*Click to view products by [Lantronix manufacturer](#):*

Other Similar products are found below :

[BB-SG30000324-51](#) [MTCDDT-LEU1-247A-915-EU-GB-AU](#) [MTCDDTIP-LEU1-275L-868](#) [MTCDDT-LEU1-246A-868-EU-GB](#) [WOP-2000G-N2AE](#) [ESRP-PCS-ECU1251](#) [BB-SG30300525-42](#) [BB-SG30500520-42](#) [1120730001](#) [SGX5150202US](#) [SGX5150102US](#) [XPC250300S-02](#) [RG191](#) [UPS-EDGE-X70864-U01](#) [UPS-EDIOT-X70864-UW01](#) [ADAM-4572-CE](#) [ADAM-6717-A](#) [ECU-1152-R11ABE](#) [EKI-1224-CE](#) [EKI-1224CI-CE](#) [ESRP-PCS-WISE710](#) [ICR-3201](#) [ICR-3201-W](#) [UNO-220-P4N1AE](#) [UNO-2271G-W1032GE](#) [WISE-3310-D100L1E](#) [WISE-3610ILS-51A1N](#) [WISE-6610-E100-A](#) [WISE-6610-N100-A](#) [AKX00016](#) [MESR901](#) [MESR902T](#) [X2-Z11-EM-W](#) [X2-HMU-EM-B](#) [X4-Z1U-B101-A](#) [AGS102-I50-6COM](#) [SGX5150020US](#) [SGX5150225US](#) [SGX51501M2ES](#) [SGX51502N5ES](#) [XPC240200B-02](#) [XPC240400B-02](#) [XPC240100S-02](#) [XPC240200S-02](#) [XPC240300S-02](#) [XPC240400S-02](#) [XPE200100S](#) [WSDA-2000](#) [WSDA-200-USB](#) [1120780001](#)