

## ETHERLINE® Cat.5 ARM

Fixed Installation


Industrial Ethernet cable Cat.5 for direct burial with rodent protection, for PROFINET applications Type C, PE outer sheath

### Info

Industrial Ethernet cable

CAT.5-Performance

Suitable for outdoor use and direct burial

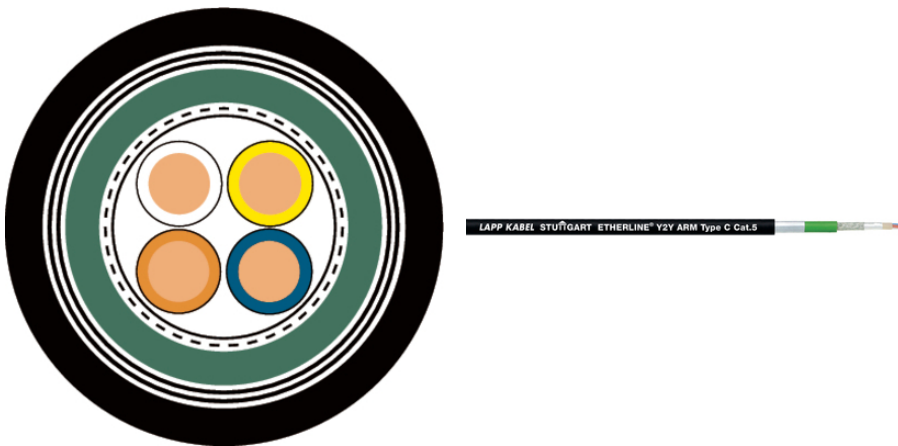

Supplementary automation components from Lapp



Mechanical and plant engineering



Suitable for outdoor use



Mechanical resistance



Robust



Interference signals



UV-resistant

### Benefits

Can be used for Industrial Ethernet in harsh industrial environments

EMC-optimised design

With armoring for improved rodent protection

Screened against interference

2pair: 10/100 Mbit/s for Industrial Ethernet

Last Update (17.02.2020)

©2020 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

## ETHERLINE® Cat.5 ARM

### Application range

Suitable for outdoor use, UV-resistant  
Suitable for direct burial  
PROFINET application Type C but for fixed installation  
suitable for EtherCAT and EtherNet/IP applications

### Product features

Fast Connect (FC) cable design

### Product Make-up

Solid and bare copper conductor  
Core insulation: PE  
Colour-coded in accordance with PROFINET for Cat.5 applications  
Star quad  
SF/UTP: braid of tinned copper wire and plastic laminated aluminum foil as overall screening  
Inner sheath made of PVC (green RAL6018)  
2 layer galvanzid steel tape  
Outer sheath made of black polyethylene (PE)

### Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000830 ETIM 5.0 Class-Description: Data cable
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000830 ETIM 6.0 Class-Description: Data cable
Peak operating voltage:	(not for power applications) 125 V
Minimum bending radius:	During installation: 15 x outer diameter Fixed installation: 10 x outer diameter
Test voltage:	Core/core: 2000 V Core/screen: 2000 V
Characteristic impedance:	nom. 100 Ω acc. to IEC 61156-5
Temperature range:	During installation: -20°C to +60°C Fixed installation: -40°C to +70°C

### Note

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.

Please find our standard lengths at: [www.lappkabel.de/en/cable-standardlengths](http://www.lappkabel.de/en/cable-standardlengths)

Packaging size: coil ≤ 30 kg or ≤ 250 m, otherwise drum

PROFINET® is a registered trademark of the PNO (PROFIBUS user organisation)

Detailed data sheets are available upon request. Please specify the type/dimensions of the required cable.

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

Article number	Article designation	Number of pairs and AWG per conductor	Core diameter in mm	Outer diameter mm	J_1NVGW
Fixed Installation					
2170496	ETHERLINE® Cat.5 ARM	2 x 2 x AWG22/1	1.5	6.5 / 9.3	30.4

Last Update (17.02.2020)  
 ©2020 Lapp Group - Technical changes reserved  
 Product Management [www.lappkabel.de](http://www.lappkabel.de)  
 You can find the current technical data in the corresponding data sheet.  
 PN 0456 / 02\_03\_16

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Cables / Networking Cables](#) category:*

*Click to view products by [Lapp Kabel](#) manufacturer:*

Other Similar products are found below :

[0152660053](#) [603020002](#) [73-7797-25](#) [73-8890-10](#) [73-8890-14](#) [73-8891-14](#) [73-8891-25](#) [73-8892-50](#) [73-8894-10](#) [73-8894-3](#) [73-8895-14](#) [73-8896-7](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [9QA0-111-12-3.00](#) [1200650742](#) [1200700174](#) [1200860368](#) [1200650013](#) [1201080008](#) [1-21919-1](#) [1300500373](#) [1300101844](#) [1300101845](#) [130050-0004](#) [1300500014](#) [1410147](#) [E16A06002M030](#) [E200102-009-S1](#) [MT14-187L](#) [17-103530](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#) [NK5EPC1GRY](#) [NK5EPC30BLY](#) [NK5EPC30VLY](#) [NK5EPC30YLY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#) [NK5EPC8BLY](#) [NK5EPC9YLY](#) [NK6PC30BUY](#) [NK6PC30GRY](#) [NK6PC30RDY](#) [NK6PC30Y](#) [NK6PC30YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#)