
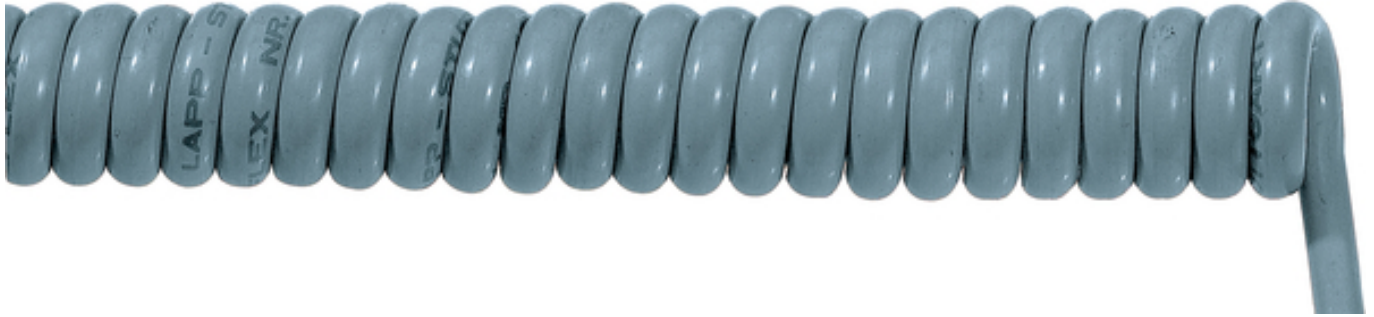


| | | |
|-------------------|-----------------------------|--|
| U.I. Lapp GmbH | PRODUCT INFORMATION |  |
| | ÖLFLEX® SPIRAL 400 P | 29.11.2013 |

PUR spiral cable with increased chemical resistance
High restoring forces and extension lengths up to 3 times the unextended spiral length



Good chemical resistance



Oil-resistant

Info

High resistance to benzols, benzines and other substances listed in Appendix T1

Application range

As control and power cables in machines
Mechanical engineering
Apparatus construction

Design

Fine-wire strand made of bare copper wires
Core insulation: Special PVC P8/1
Use of talcum
Outer sheath made of special polyurethane
Length of straight ends: 1st end = 200 mm, 2nd end = 600 mm
Versions without the mandatory LAPP designation, but with other solid lengths, end lengths and end forms available on request

Norm references / Approvals

Core based on VDE 0812/0285
Outer sheath based on VDE 0250/0285


Product features

Resistant to microbes, hydrolysis and almost all mineral oils
High chemical-resistance to benzols, benzenes and other agents listed in the selection table in Appendix T1

Remark

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.
Copper price basis: EUR 150/100kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.
Photographs are not to scale and do not represent detailed images of the respective products.
Versions without the mandatory LAPP designation, but with other solid lengths, end lengths and end forms available on request

| | | |
|--------------------|----------------------------|-------|
| Product Management | Document: LAPP_PRO45EN.pdf | 1 / 5 |
|--------------------|----------------------------|-------|

| | | |
|-------------------|-----------------------------|--|
| U.I. Lapp GmbH | PRODUCT INFORMATION |  LAPP GROUP |
| | ÖLFLEX® SPIRAL 400 P | 29.11.2013 |

Technical Data

| | |
|---------------------------------|---|
| Core identification code: | Black with white numbers acc. to VDE 0293-1 |
| Specific insulation resistance: | > 20 GOhm x cm |
| Conductor stranding: | Fine wire according to VDE 0295 Class 5/ IEC 60228 Class 5 |
| Nominal voltage: | U ₀ /U: 300/500 V |
| Test voltage: | 3000 V |
| Protective conductor: | G = with GN-YE protective conductor X = without protective conductor |
| Temperature range: | Flexible use: +5°C to +50°C |

| | | |
|--------------------|----------------------------|-------|
| Product Management | Document: LAPP_PRO45EN.pdf | 2 / 5 |
|--------------------|----------------------------|-------|

| Part number | Number of cores and mm ² per conductor | Spiral length/ extended (mm) | Spiral length/ unextended (mm) | Cable diameter (mm) | Spiral outer dia (mm) |
|-------------|---|------------------------------|--------------------------------|---------------------|-----------------------|
| 70002622 | 2 X 0,75 | 1500 | 500 | 5.4 | 19.5 |
| 70002623 | 2 X 0,75 | 3000 | 1000 | 5.4 | 19.5 |
| 70002624 | 2 X 0,75 | 4500 | 1500 | 5.4 | 19.5 |
| 70002625 | 2 X 0,75 | 6000 | 2000 | 5.4 | 19.5 |
| 70002628 | 3 G 0,75 | 1500 | 500 | 5.7 | 20.0 |
| 70002629 | 3 G 0,75 | 3000 | 1000 | 5.7 | 20.0 |
| 70002630 | 3 G 0,75 | 4500 | 1500 | 5.7 | 20.0 |
| 70002631 | 3 G 0,75 | 6000 | 2000 | 5.7 | 20.0 |
| 70002634 | 4 G 0,75 | 1500 | 500 | 6.2 | 21.0 |
| 70002635 | 4 G 0,75 | 3000 | 1000 | 6.2 | 21.0 |
| 70002636 | 4 G 0,75 | 4500 | 1500 | 6.2 | 21.0 |
| 70002637 | 4 G 0,75 | 6000 | 2000 | 6.2 | 21.0 |
| 70002640 | 5 G 0,75 | 1500 | 500 | 6.7 | 24.0 |
| 70002641 | 5 G 0,75 | 3000 | 1000 | 6.7 | 24.0 |
| 70002642 | 5 G 0,75 | 4500 | 1500 | 6.7 | 24.0 |
| 70002643 | 5 G 0,75 | 6000 | 2000 | 6.7 | 24.0 |
| 70002726 | 7 G 0,75 | 1500 | 500 | 7.3 | 27.0 |
| 70002727 | 7 G 0,75 | 3000 | 1000 | 7.3 | 27.0 |
| 70002728 | 7 G 0,75 | 4500 | 1500 | 7.3 | 27.0 |
| 70002729 | 7 G 0,75 | 6000 | 2000 | 7.3 | 27.0 |
| 70002731 | 12 G 0,75 | 1500 | 500 | 9.9 | 35.0 |
| 70002732 | 12 G 0,75 | 3000 | 1000 | 9.9 | 35.0 |
| 70002734 | 18 G 0,75 | 1500 | 500 | 11.7 | 40.0 |
| 70002735 | 18 G 0,75 | 3000 | 1000 | 11.7 | 40.0 |
| 70002646 | 2 X 1 | 1500 | 500 | 5.7 | 20.0 |
| 70002647 | 2 X 1 | 3000 | 1000 | 5.7 | 20.0 |
| 70002648 | 2 X 1 | 4500 | 1500 | 5.7 | 20.0 |
| 70002649 | 2 X 1 | 6000 | 2000 | 5.7 | 20.0 |
| 70002651 | 3 G 1 | 1500 | 500 | 6.0 | 21.0 |
| 70002652 | 3 G 1 | 3000 | 1000 | 6.0 | 21.0 |
| 70002653 | 3 G 1 | 4500 | 1500 | 6.0 | 21.0 |
| 70002654 | 3 G 1 | 6000 | 2000 | 6.0 | 21.0 |
| 70002656 | 4 G 1 | 1500 | 500 | 6.5 | 24.0 |

| Part number | Number of cores and mm ² per conductor | Spiral length/ extended (mm) | Spiral length/ unextended (mm) | Cable diameter (mm) | Spiral outer dia (mm) |
|-------------|---|------------------------------|--------------------------------|---------------------|-----------------------|
| 70002657 | 4 G 1 | 3000 | 1000 | 6.5 | 24.0 |
| 70002658 | 4 G 1 | 4500 | 1500 | 6.5 | 24.0 |
| 70002659 | 4 G 1 | 6000 | 2000 | 6.5 | 24.0 |
| 70002661 | 5 G 1 | 1500 | 500 | 7.1 | 25.0 |
| 70002662 | 5 G 1 | 3000 | 1000 | 7.1 | 25.0 |
| 70002663 | 5 G 1 | 4500 | 1500 | 7.1 | 25.0 |
| 70002664 | 5 G 1 | 6000 | 2000 | 7.1 | 25.0 |
| 70002666 | 7 G 1 | 1250 | 500 | 8.0 | 30.0 |
| 70002667 | 7 G 1 | 2500 | 1000 | 8.0 | 30.0 |
| 70002668 | 7 G 1 | 3750 | 1500 | 8.0 | 30.0 |
| 70002669 | 7 G 1 | 5000 | 2000 | 8.0 | 30.0 |
| 70002670 | 12 G 1 | 1500 | 500 | 10.5 | 37.0 |
| 70002671 | 12 G 1 | 3000 | 1000 | 10.5 | 37.0 |
| 70002672 | 18 G 1 | 1500 | 500 | 12.7 | 45.0 |
| 70002673 | 18 G 1 | 3000 | 1000 | 12.7 | 45.0 |
| 70002681 | 2 X 1,5 | 1500 | 500 | 6.3 | 23.0 |
| 70002682 | 2 X 1,5 | 3000 | 1000 | 6.3 | 23.0 |
| 70002683 | 2 X 1,5 | 4500 | 1500 | 6.3 | 23.0 |
| 70002684 | 2 X 1,5 | 6000 | 2000 | 6.3 | 23.0 |
| 70002687 | 3 G 1,5 | 1500 | 500 | 6.7 | 24.0 |
| 70002688 | 3 G 1,5 | 3000 | 1000 | 6.7 | 24.0 |
| 70002689 | 3 G 1,5 | 4500 | 1500 | 6.7 | 24.0 |
| 70002690 | 3 G 1,5 | 6000 | 2000 | 6.7 | 24.0 |
| 70002699 | 5 G 1,5 | 1250 | 500 | 8.1 | 30.0 |
| 70002700 | 5 G 1,5 | 2500 | 1000 | 8.1 | 30.0 |
| 70002701 | 5 G 1,5 | 3750 | 1500 | 8.1 | 30.0 |
| 70002702 | 5 G 1,5 | 5000 | 2000 | 8.1 | 30.0 |
| 70002705 | 7 G 1,5 | 1250 | 500 | 8.9 | 31.0 |
| 70002706 | 7 G 1,5 | 2500 | 1000 | 8.9 | 31.0 |
| 70002707 | 7 G 1,5 | 3750 | 1500 | 8.9 | 31.0 |
| 70002708 | 7 G 1,5 | 5000 | 2000 | 8.9 | 31.0 |
| 70002709 | 12 G 1,5 | 1500 | 500 | 12.0 | 46.0 |
| 70002710 | 12 G 1,5 | 3000 | 1000 | 12.0 | 46.0 |

| Part number | Number of cores and mm ² per conductor | Spiral length/ extended (mm) | Spiral length/ unextended (mm) | Cable diameter (mm) | Spiral outer dia (mm) |
|-------------|---|------------------------------|--------------------------------|---------------------|-----------------------|
| 70002711 | 18 G 1,5 | 1500 | 500 | 13.4 | 52.0 |
| 70002712 | 18 G 1,5 | 3000 | 1000 | 13.4 | 52.0 |
| 70002716 | 3 G 2,5 | 1250 | 500 | 8.1 | 28.5 |
| 70002717 | 3 G 2,5 | 2500 | 1000 | 8.1 | 28.5 |
| 70002718 | 3 G 2,5 | 3750 | 1500 | 8.1 | 28.5 |
| 70002719 | 3 G 2,5 | 5000 | 2000 | 8.1 | 28.5 |
| 70002721 | 5 G 2,5 | 1250 | 500 | 10.0 | 37.0 |
| 70002722 | 5 G 2,5 | 2500 | 1000 | 10.0 | 37.0 |
| 70002723 | 5 G 2,5 | 3750 | 1500 | 10.0 | 37.0 |
| 70002724 | 5 G 2,5 | 5000 | 2000 | 10.0 | 37.0 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coaxial Cables](#) category:

Click to view products by [Lapp Kabel](#) manufacturer:

Other Similar products are found below :

[89880-003-1000](#) [633948-877-1000](#) [CY2389-000](#) [8213-010-1000](#) [8221-010-U1000](#) [8233-010-1000](#) [88281-010-500](#) [1322R-010-1000](#) [177799-000](#) [1807A-B59-U1000](#) [9167-010-1000](#) [9251-010-1000](#) [9275-010-U1000](#) [935240-000](#) [9659-010-1000](#) [980704-001](#) [CF2823-000](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [1673B TIN100](#) [672525-001](#) [144517-000](#) [8-1616396-1](#) [8263-010-U1000](#) [8263 010U500](#) [8268-010-500](#) [8262 010U1000](#) [7915A 009U1000](#) [5024A1311-0](#) [TRC-75-1](#) [1281S5 010250](#) [1281S5 000250](#) [1530A 010U1000](#) [1505A 0081000](#) [9248 010U1000](#) [CO-142BNCX200-001](#) [7809WB 010500](#) [9244 0101000](#) [1694A 0081000](#) [9204 0101000](#) [8241F J5C1000](#) [1530A 0101000](#) [1674A TIN50](#) [7915A 0091000](#) [7915A 010500](#) [TWCH-78-2](#) [TWC-78-1](#)