


21700129	DATA SHEET	
Valid from: 17.06.2020	ETHERLINE ACCESS U08GT	

Description

- Fast Ethernet Network-Switch (10/100/1000BaseT(X)), unmanaged
- Ports: 8x RJ45
- Suitable for harsh industrial environment (Protection class IP30)



General characteristics

Interfaces & buttons

RJ45 Port: 10/100/1000BaseT(X) auto-negotiation, full-/halfduplex-mode and Auto-MDI/MDI-X-connection

DIP-switch

Activate/deactivate Broadcast Storm Protection
Activate/deactivate Jumbo Frames

Switch properties

MAC- tablesize: 8 K
packet-bufferize: 4 Mbit
packet forwarding rate: 11.90 Mpps
Jumbo Frame Size: 9.6 KB (max.)

Temperature range

operating temp.: -10°C to +60°C (14°F to 140°F)
storage temp.: -40°C to +85°C (-40°F to 185°F)

Relative humidity

5% to 95 % (non-condensing)

Standards

IEEE 802.3i (10BaseT)
IEEE 802.3u (100BaseTX)
IEEE 802.3ab (1000Base-T)

Processing type

Store and Forward

MTBF (mean time between failures)

2.486.867 Std @ Telcordia (Bellcore), GB

Power requirements

Connection

1 removable 4- pole terminal block

Input voltage

24 V AC /V DC (18-30V AC, 50/60Hz; 12-48V DC)

Power Consumption (max.)

10 W

Input current (max.)

0.85 A

Overload current protection

support

Reverse polarity protection

support

Redundancy protection

support

Physical properties

Housing

metal

IP class

IP30


Weight

0.5 kg

Installation


DIN-rail mounting

Creator: FELI1/PDP	Document: DB21700129EN	Page 1 of 2
Released: IVSE1/PDP	Version: 00	

21700129	DATA SHEET	
Valid from: 17.06.2020	ETHERLINE ACCESS U08GT	

Technical drawing

Dimensional drawing

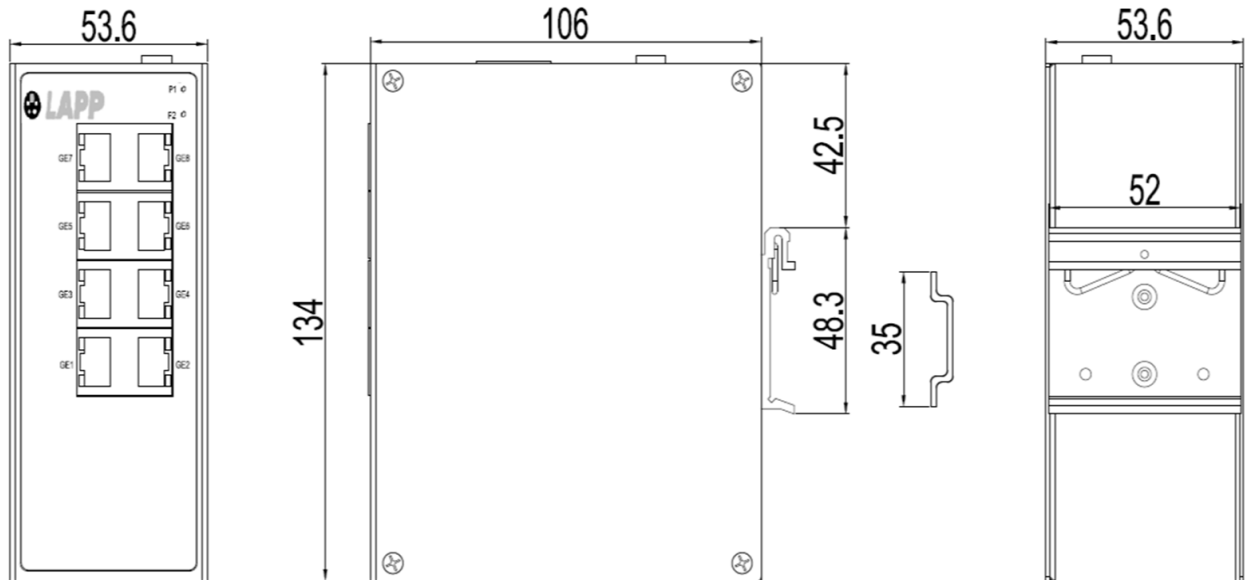

Standards and approvals

Safety	UL61010
EMC	EN55022/CISPR22 Class A
EMI	FCC CFR47 Part 15
EMS	IEC 61000-4-2 ESD: contact: 6kV / air: 8kV IEC 61000-4-3 RS: 80MHz to 2GHz: 10V/m IEC 61000-4-4 EFT/Burst: Power: 2kV / Signal: 1kV IEC 61000-4-5 Surge: Power: 1kV / Signal: 1kV IEC 61000-4-6 CS: 10V (150 kHz – 80 MHz)
Vibration	according IEC 60068-2-6
Shock	according IEC 60068-2-27
Free fall	according IEC 60068-2-31
Approvals	CE UL (E331560) FCC

Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: FELI1/PDP Released: IVSE1/PDP	Document: DB21700129EN Version: 00	Page 2 of 2
---	---------------------------------------	-------------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Lapp Kabel](#) manufacturer:

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC EXTENDER 2001](#)
[ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [7000-P3201-P050150](#) [750-451](#) [750-494](#) [750-495](#) [750-501](#) [750-612](#) [750-627](#) [750-643](#) [750-652](#) [750-](#)
[653/003-000](#) [753-440](#) [753-540](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [EKI-](#)
[7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-4FP-AE](#) [2352903-2](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [7000-74712-4780030](#) [7000-74712-](#)
[4780060](#) [7000-74712-4780100](#) [7000-74712-4780150](#) [750-331](#) [753-649](#) [852-1200](#) [852-1210](#) [852-1280](#) [PM02TWA](#) [ICR-1601G](#) [BOXER-](#)
[6641-A1-1110](#) [EKI-7712G-4F-AE](#) [55150](#) [56005](#)