


21700123	DATA SHEET	
Valid from: 30.03.2020	ETHERLINE® ACCESS U0(P*)T-2GEN	

Description

- Fast Ethernet Network-Switch (10/100BaseT(X)), unmanaged
- Ports: RJ45
- Hardware designed for harsh industrial (protection code IP30)



General characteristics

Interfaces	RJ45 Port: 10/100BaseT(X) auto-negotiation, full-/halfduplex-mode and Auto-MDI/MDI-X-connection DIP-Button: enable/disable broadcast storm protection
Switch properties	MAC-tablesize: 2 K paket-buffersize: 1 Mbit
Temperature range	operating temp.: -10°C to +60°C (14°F to 140°F) storage temp.: -40°C to +85°C (-40°F to 185°F)
Relative humidity	5% to 95 % (non-condensing)
Standards	IEEE 802.3i (10BaseT) IEEE 802.3u (100BaseT(X))
Processing type	Store and Forward
MTBF (mean time between failures)	6.280.112 Std @ Telcordia (Bellcore), GB (U05T-2GEN) 5.079.190 Std @ Telcordia (Bellcore), GB (U08T-2GEN)

Variation

Article	Description	Ports (P*) [amount]
21700123	ETHERLINE ACCESS U05T-2GEN	5
21700124	ETHERLINE ACCESS U08T-2GEN	8


Power requirements

Connection	1 removable 4-pole terminal block
Input Voltage	24 V AC /V DC (18-30V AC, 50/60Hz; 12-48V DC)
Power Consumption (max.)	3.4 W (U05T-2GEN) 4.6 W (U08T-2GEN)
Input current (max.)	0.30 A (U05T-2GEN) 0.40 A (U08T-2GEN)
Overload current protection	support
Reverse polarity protection	support
Redundancy protection	support

Physical properties


Housing	Metal
IP class	IP30
Weight	0.2 kg (U05T-2GEN) 0.3 kg (U08T-2GEN)
Installation	DIN-rail mounting

Creator: FELI1/PDP Released: IVSE1/PDP	Document: DB21700123EN Version: 01	Page 1 of 3
-------------------------------------------	---------------------------------------	-------------


21700123	DATA SHEET	
Valid from: 30.03.2020	ETHERLINE® ACCESS U0(P*)T-2GEN	

Technical drawing


Dimensional drawing (U05T-2GEN)

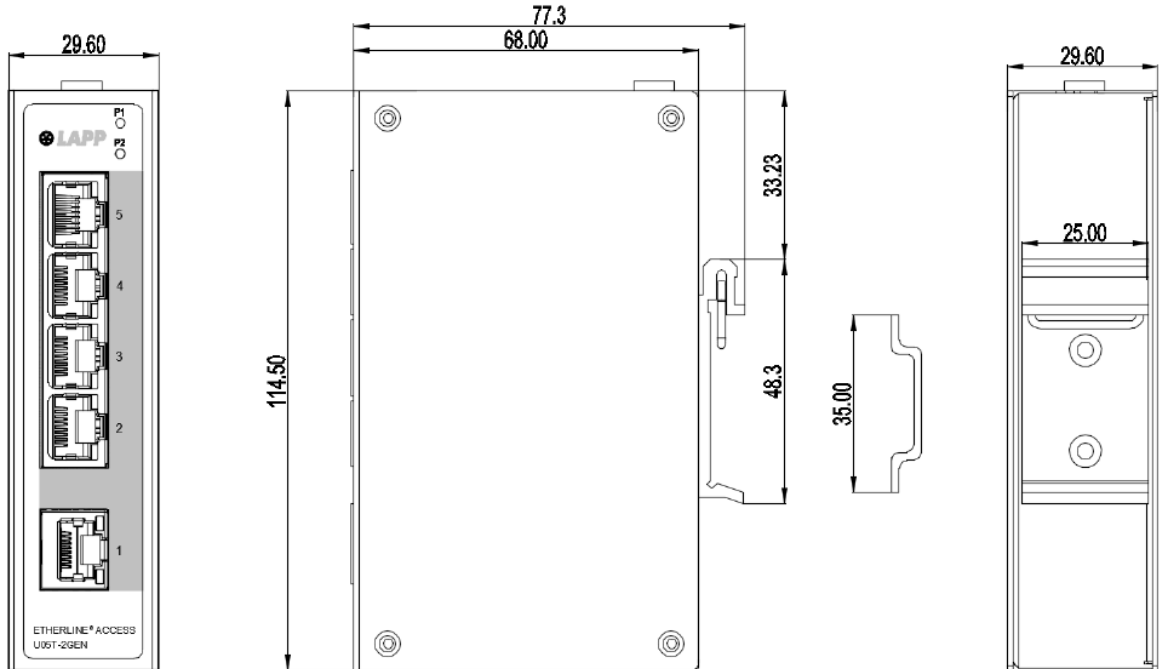

Dimensional drawing (U08T-2GEN)

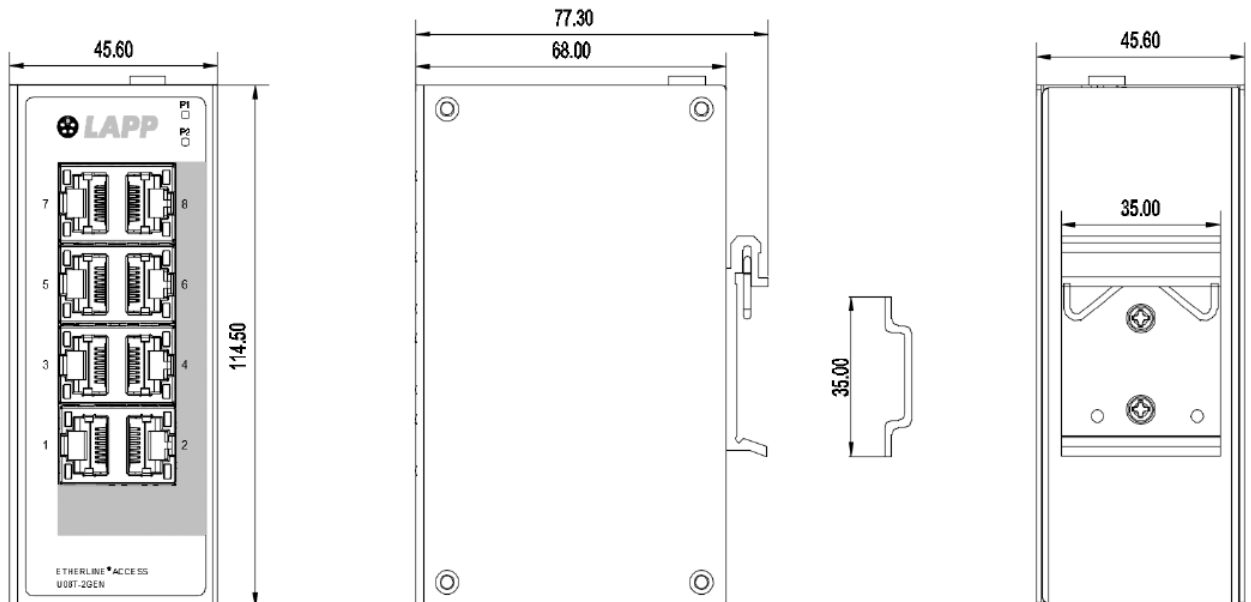

Creator: FELI1/PDP Released: IVSE1/PDP	Document: DB21700123EN Version: 01	Page 2 of 3
-------------------------------------------	---------------------------------------	-------------

21700123	DATA SHEET	
Valid from: 30.03.2020	ETHERLINE® ACCESS U0(P*)T-2GEN	

Standards and approvals

Safety	UL61010
EMC	EN55022/CISPR22 Class A
EMI	FCC CFR47 Part 15
EMS	IEC 61000-4-2 ESD: contact: 6kV / air: 8kV IEC 61000-4-3 RS: 80Mhz to 2GHz: 10V/m IEC 61000-4-4 EFT/Burst: Power: 2kV / Signal: 1kV IEC 61000-4-5 Surge: Power: 1kV / Signal: 1kV IEC 61000-4-6 CS: 10V (150 kHz – 80 MHz)
Vibration	according IEC 60068-2-6
Shock	according IEC 60068-2-27
Free fall	according IEC 60068-2-31
Approvals	CE UL (E331560) FCC

Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: FELI1/PDP Released: IVSE1/PDP	Document: DB21700123EN Version: 01	Page 3 of 3
-------------------------------------------	---------------------------------------	-------------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Lapp Kabel](#) manufacturer:

Other Similar products are found below :

[61FGPN8DAC120](#) [CV500SLK21](#) [70177-1011](#) [F03-03 HAS C](#) [F03-31](#) [81550401](#) [H2CAC24A](#) [H2CRSAC110B](#) [R88A-CRGB003CR-E](#)
[R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [AFP0RT32CT](#) [DRT2ID08C](#) [DTB4896VRE](#) [DTB9696LVE](#) [E53-AZ01](#) [E53E01](#) [E53E8C](#)
[E5C4Q40J999FAC120](#) [E5CWLQ1TCAC100240](#) [E5GNQ03PFLKACDC24](#) [B300LKL21](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV-CN001](#) [OAS-160-N](#) [C40PEDRA](#) [K31S6](#) [K33-L1B](#) [K3MA-F 100-240VAC](#) [K3TX-AD31A](#) [89750101](#) [L595020](#)
[SRM1-C02](#) [SRS2-1](#) [G32X-V2K](#) [26546803](#) [26546805](#) [PWRA440A](#) [CPM1AETL03CH](#) [CV500SLK11](#) [3G2A5BI081](#) [3G2A5IA122](#)
[3G2A5LK010E](#) [3G2A5OA223](#) [3G2A5OD211](#) [3G2A5PS223E](#) [3G2A5RM001EV1](#)