


# Wireless Alert T




Wireless Alert T is a battery-powered temperature sensor that sends a warning email if a user-set level is reached. Simply select your temperature limits and connect to your Wi-Fi network using the FilesThruTheAir mobile app.

- -18 to +54 °C measurement range using an internal sensor
- User-configurable high and low temperature limits
- Sends email alerts and scheduled status reports
- Flashing alert indicator
- Wi-Fi connected
- Simple to set up using the free mobile app
- Two years' battery life (typical)
- No ongoing subscription fees
- Includes sticky pad for wall mounting

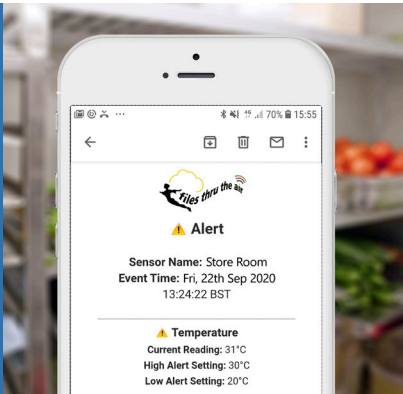

The Wireless Alert T can be set up to monitor temperature limits in a variety of applications. High and low temperature limits are user-configurable between -18 and 54 °C (0 and 129 °F). The device will trigger a notification email, sent to a user-selected address, if the temperature limits are breached and when the temperature returns to normal. In addition to this, the device can send a scheduled summary email detailing minimum, maximum and average temperature, as well as battery level, number of alerts, and total time spent in alert.

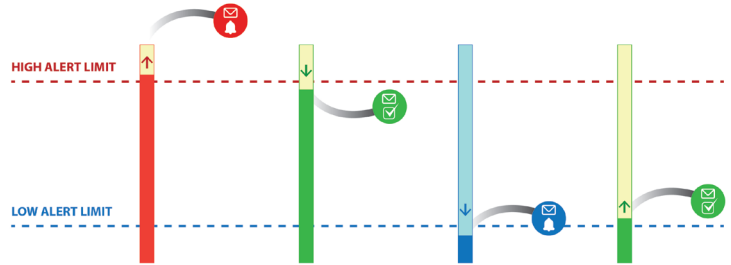

## Specifications

	Minimum	Typical	Maximum	Unit
Measurement Range	-18 (0)		54 (129)	°C (°F)
Measurement Resolution		1 (2)		°C (°F)
Measurement Accuracy		±1 (±2)		°C(°F)
Device Operating Temperature	-18 (0)		54 (129)	°C (°F)
Alert Levels	User-configurable, within measurement range stated above			
Response Time	< 1 minute			
Environmental Conditions*	Indoor use only - IP5X			
Product Dimensions	69 x 32 x 22 (2.7 x 1.3 x 0.9)			mm (inches)
Battery Type	2 x 1.5V Alkaline LR03/UM4/AAA			
Battery Life**	2			Years
Wi-Fi***	WPA/WPA-2 Personal - 802.11bgn (2.4GHz)			

## FilesThruTheAir App

The Wireless Alert T is simple to set up, using the free FilesThruTheAir app, available on Google Play or the App Store.



Specifications liable to change without prior warning.

\* This device is not suitable for use inside fridges or freezers. Please see our Wireless Alert TP product instead.

\*\* Battery life is dependent on: signal strength between router/access point and Wireless Alert device, presence, volume and type of Wi-Fi traffic from other devices, operating temperature and number of alerts sent.

\*\*\* For products that are compatible with Enterprise networks, see our EL-WiFi and EL-MOTE data logging ranges.

## Other Wi-Fi connected products from FilesThruTheAir™

FilesThruTheAir offer a variety of sensors and data loggers.

Visit [www.filesthrutheair.com](http://www.filesthrutheair.com) to find out if we have something to fit your application.



[www.filesthrutheair.com/wireless-alert](http://www.filesthrutheair.com/wireless-alert)

FilesThruTheAir™ is a trademark of Corintech Ltd.  
Asford Mill, Station Road, Fordingbridge, Hampshire, SP6 1DZ, UK

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Environmental Test Equipment](#) category:*

*Click to view products by [Lascar](#) manufacturer:*

Other Similar products are found below :

[CW40](#) [F150C10E3DRT](#) [F150LTC20](#) [F150CD10E2](#) [F150L75](#) [F150LRS](#) [2837806](#) [4328074](#) [4366444](#) [S-11](#) [382153](#) [700PTP-1](#) [GEO-](#)  
[CABLE-REEL-50M](#) [H115](#) [H300](#) [F150-SLC50](#) [AW-CO-1000](#) [AW-H2S-100](#) [AW-NmHc-100](#) [ES1-CO-1000-01](#) [P 2801](#) [P 2802](#) [TM-197](#)  
[ULD-420-EUR](#) [TM-192](#) [TM-192D](#) [TM-305U](#) [TM-414](#) [UT309C](#) [EL-P-TC-T-SURFACE](#) [UT301C+](#) [HS115](#) [12227021](#) [13123602](#) [13123661](#)  
[12255930](#) [12983030](#) [30171091](#) [30198712](#) [30198755](#) [30209323](#) [12228657](#) [12229067](#) [12230090](#) [7358958](#) [12231398](#) [12231487](#) [7390682](#)  
[12231550](#) [7391840](#)