



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

**RoHS Compliant** ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/26/13	D.GRIFFIN



"P1"  
MALE 15 PIN  
D-SUB CONNECTOR

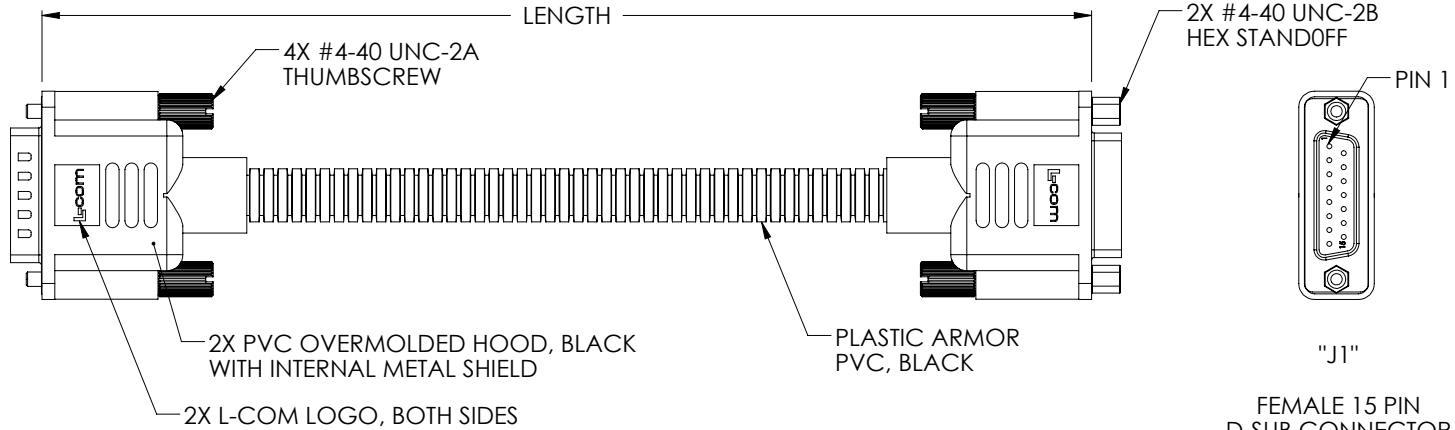

WIRE CHART		
"P1"	COLOR	"J1"
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	VIOLET	8
9	GRAY	9
10	WHITE	10
11	PINK	11
12	LIGHT GREEN	12
13	BLACK/WHITE	13
14	BROWN/WHITE	14
15	RED/WHITE	15
SHELL	DRAIN WIRE	SHELL

PART NUMBER	LENGTH	
	FT	METERS
CSPL15MF-2.5	2.5	0.76
CSPL15MF-5	5.0	1.52
CSPL15MF-10	10.0	3.05
CSPL15MF-15	15.0	4.57
CSPL15MF-25	25.0	7.62
CSPL15MF-50	50.0	15.24

**NOTES:**

- CABLE: UL STYLE 2919, 15 CONDUCTOR (26AWG) (DOUBLE SHIELDED, BRAID & FOIL)  
JACKET: PVC, LIGHT GRAY (PANTONE 400C)
- CABLE SHALL BE TESTED FOR CONTINUITY.
- CABLE SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = +1 [25] / -0 $>12$ [305] $\leq 60$ [1524] = +2 [51] / -0 $>60$ [1524] $\leq 120$ [3048] = +4 [102] / -0 $>120$ [3048] $\leq 300$ [7620] = +6 [152] / -0 $>300$ [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY D.PARHAM CHECKED BY D.DESJARDIN APPROVED BY S.SMITH	DATE 05/04/2011 01/04/2013 01/04/2013	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY D-SUBMINIATURE
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
	DWG. NO. CSPL15MF		SCALE: NONE	CAD FILE: CSPL15MF.SLDDRW
SHEET 1 OF 1			REV. <b>A</b>	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Computer Cables](#) category:*

*Click to view products by [L-Com](#) manufacturer:*

Other Similar products are found below :

[68809-0004](#) [8F36-AAA105-1.00](#) [CB-716EB-RS](#) [CB-716P8P9-RS](#) [CBK-11-290K-00](#) [ACL-10550](#) [ACL-10568-2](#) [ACL-10568-5](#) [426091300-3](#)  
[48000023](#) [10114976-P015002LF](#) [10111838-S444ALF](#) [88761-6101](#) [ACL-10568NF-1](#) [PCL-101100R-2E](#) [PS/2 Cable](#) [DG9015MF1](#) [68801-](#)  
[1905](#) [111068-1015](#) [100436-1107](#) [68801-0630](#) [68801-3612](#) [68801-3618](#) [SATA cable](#) [96021-0000-00-0](#) [FAK-SMZSMZ-3M](#) [1700001531](#)  
[96048-0000-00-0](#) [96054-0000-00-0](#) [SATA III cable 30cm, down/straight](#) [cab-Pico-ITX-LVDS](#) [AXXSTCBLQAT](#) [PCL-101100M-2E](#)  
[7010501874](#) [2 port SATA to 5 pin,L=200mm](#) [ACL-10568NF-2](#) [PCL-101100R-1E](#) [68561-0020](#) [74546-0813](#) [74546-1605](#) [74547-0120](#)  
[0745470304](#) [0745470305](#) [88750-5310](#) [88750-5318](#) [88751-1310](#) [0DT60002](#) [C-PS2WG/5](#) [C-PS2WW/3](#) [73220861](#)