





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/23/18	D.FRISIELLO

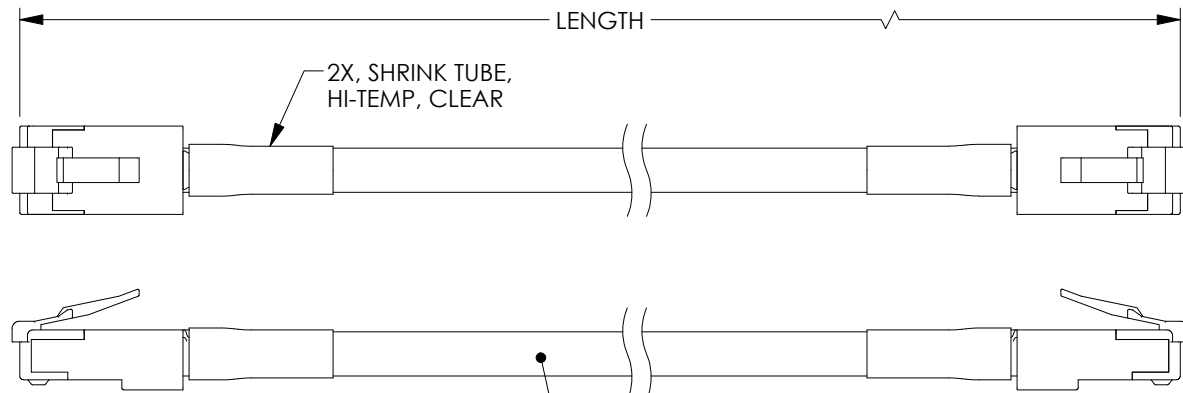

4TP, CAT 5e, 26AWG STRANDED SILVER PLATED COPPER WITH ALUM/POLY FOIL SHIELD AND ROUND TINNED PLATED COPPER BRAID, (85% MIN. COVERAGE). JACKET: FEP, BLUE
 OPERATING TEMPERATURE RANGE: -55 °C TO +150 °C
 NOM. DIA: .230" [5.84], MIN. BEND RAD: 1.15" [29.2]

MODEL NUMBER	LENGTH FEET [METERS]
TRA5261-1F	1.0 [.30]
TRA5261-2F	2.0 [.61]
TRA5261-3F	3.0 [.91]
TRA5261-5F	5.0 [1.52]
TRA5261-10F	10.0 [3.05]
TRA5261-15F	15.0 [4.57]
TRA5261-25F	25.0 [7.62]
TRA5261-50F	50.0 [15.24]
TRA5261-75F	75.0 [22.86]
TRA5261-100F	100.0 [30.48]
TRA5261-125F	125.0 [38.10]
TRA5261-150F	150.0 [45.72]
TRA5261-175F	175.0 [53.34]
TRA5261-200F	200.0 [60.96]

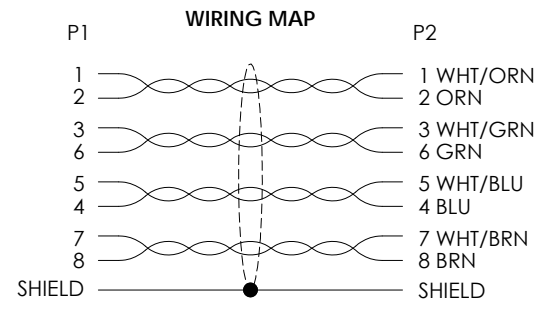

NOTES:

FIRE PROPERTIES: (FST)
 MEETS OR EXCEEDS THE APPLICABLE REQUIREMENTS OF FAR 25.869, FAR 25.853, ABD0031, AND D6-51377.

- LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
- PLUG CONFORMS TO TIA-1096.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ± .005 [1.3]	APPROVALS	DATE	50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	2/22/18	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION C5e SF/UTP 26STR FEP BLU +150°
SIZE A	FSCM NO. 43321	DWG. NO. TRA5261	REV. A
SCALE: NONE		CAD FILE: TRA5261.SLDDRW	SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [L-Com](#) manufacturer:

Other Similar products are found below :

[27-500-010](#) [AL-ECF504-AB](#) [ANM-1406](#) [AOCQP28100-007](#) [AOCQSP40-010](#) [AOCSP10-002](#) [BA35FF](#) [BAK400](#) [BC030B](#) [BC030R](#) [BC25](#)
[BC40](#) [BC50](#) [BC55](#) [BTB5MD](#) [CA3A-90DA-05M](#) [CA3A-90LA-1M](#) [CA3A-90RA-05M](#) [CA3A-90RMICB-05M](#) [CA3N030](#) [CA3N050](#)
[CA90DA-90DB-03M](#) [CAPUSB-A](#) [CAPUSB-B](#) [CAP-WPRJ](#) [CA-RSPNMB010](#) [CASATAL-18](#) [CASATARL-12](#) [CAUALAL-1M](#)
[CAUALAL-2M](#) [CAUALAL-3M](#) [CAUALB-1M](#) [CAUBLKAA-2M](#) [CAUBLKAB-05M](#) [CAUBLKAB-1M](#) [CAUBLKAB-3M](#) [CAUBLKAB-](#)
[4M](#) [CAUBLKAB-5M](#) [CC58C-10](#) [CC58C-12](#) [CC58C-2](#) [CC58C-5](#) [CC59A-25](#) [CG-C6A-MF](#) [CG-C6-MF](#) [CGDVIMM-10](#) [CGSVGAMM-10](#)
[CIB24-05M](#) [CIB24-1M](#) [CIB24-2M](#)