
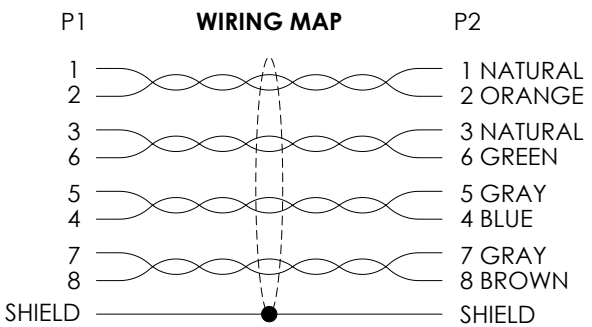


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/02/2019	DGUTTADAUR

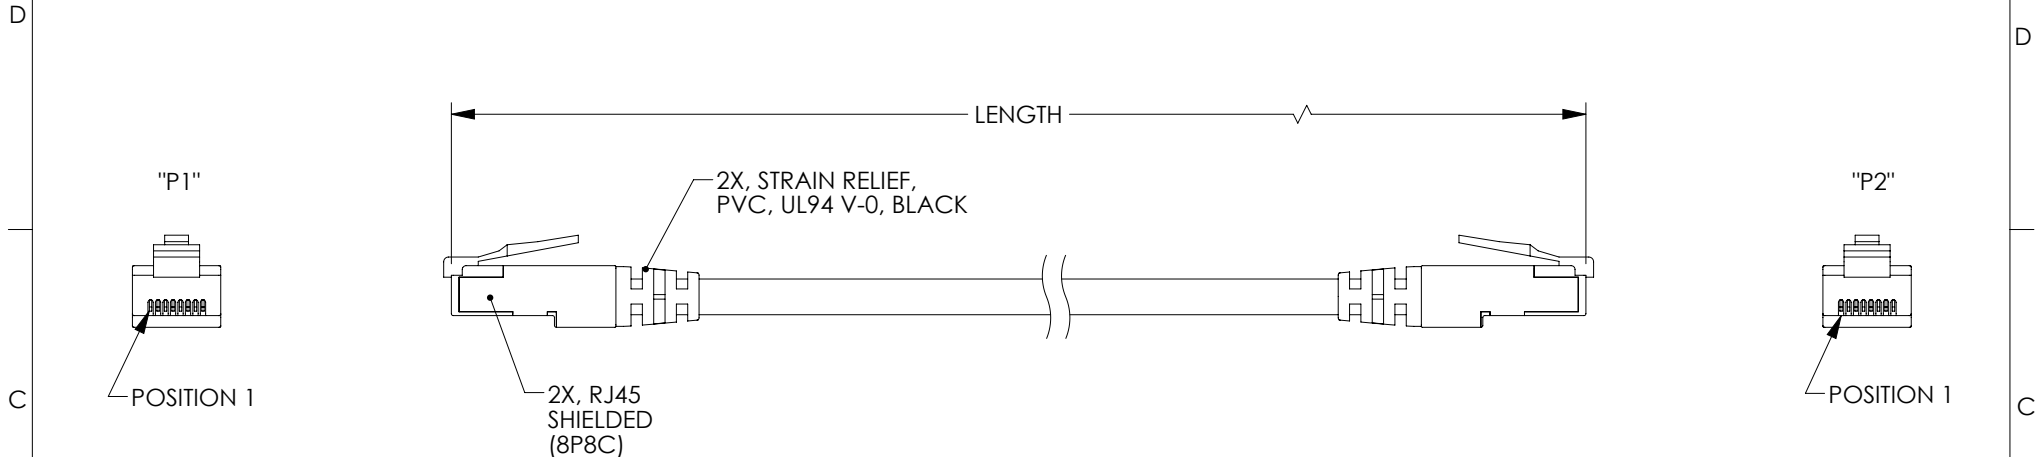

PART NUMBER	LENGTH FEET [METERS]
TRD628AP-BLU-1	1.0 [.30]
TRD628AP-BLU-3	3.0 [.91]
TRD628AP-BLU-5	5.0 [1.52]
TRD628AP-BLU-7	7.0 [2.13]
TRD628AP-BLU-10	10.0 [3.05]
TRD628AP-BLU-14	14.0 [4.26]
TRD628AP-BLU-20	20.0[6.10]

NOTES:

MATERIAL:
 PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
 CONTACTS: PHOSPHOR BRONZE
 CABLE JACKET:PVC,BLUE
 PLUG SHIELDING: BRASS

FINISH:
 CONTACTS:50 μINCHES GOLD IN CONTACT AREA
 OVER 100 μINCHES NICKEL PLATE OVERALL
 PLUG SHIELDING:NICKEL PLATED

CABLE CHARACTERISTICS:
 TYPE: CMP
 SHIELDED,FOUR TWISTED PAIR, CAT 6A MODULAR CABLE
 CONDUCTORS: 28 AWG STRANDED TINNED COPPER
 SHIELDING:ALUMINUM POLYESTER ALUMINUM FOIL SHIELD AND DRAIN WIRE
 CABLE JACKET NOM. DIAM. .186[4.72]
 CABLE OPERATING TEMPERATURE RANGE: -20°C TO 105 °C

MISCELLANEOUS:
 PLUG CONFORMS TO TIA-1096.
 OPERATING TEMPERATURE RANGE: -20°C TO 105 °C
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [.51] .XXX = ±.005 [.13]	APPROVALS DCUI CHECKED BY SPAN APPROVED BY DGUTTADAUR	DATE 03/21/2019 03/21/2019 03/21/2019			50 HIGH STREET NORTH ANDOVER, MA 01845
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY TELECOM/MODULAR		
	COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION CA CAT 6A F/UTP 28AWG RJ45 CMP +105C		
	PROJECTION 	SIZE A	FSCM NO. 43321	DWG. NO. TRD628AP-BLU	REV. A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [L-Com](#) manufacturer:

Other Similar products are found below :

[27-500-010](#) [AL-ECF504-AB](#) [ANM-1406](#) [AOCQP28100-007](#) [AOCQSP40-010](#) [AOCSP10-002](#) [BA35FF](#) [BAK400](#) [BC030B](#) [BC030R](#) [BC25](#)
[BC40](#) [BC50](#) [BC55](#) [BTB5MD](#) [CA3A-90DA-05M](#) [CA3A-90LA-1M](#) [CA3A-90RA-05M](#) [CA3A-90RMICB-05M](#) [CA3N030](#) [CA3N050](#)
[CA90DA-90DB-03M](#) [CAPUSB-A](#) [CAPUSB-B](#) [CAP-WPRJ](#) [CA-RSPNMB010](#) [CASATAL-18](#) [CASATARL-12](#) [CAUALAL-1M](#)
[CAUALAL-2M](#) [CAUALAL-3M](#) [CAUALB-1M](#) [CAUBLKAA-2M](#) [CAUBLKAB-05M](#) [CAUBLKAB-1M](#) [CAUBLKAB-3M](#) [CAUBLKAB-](#)
[4M](#) [CAUBLKAB-5M](#) [CC58C-10](#) [CC58C-12](#) [CC58C-2](#) [CC58C-5](#) [CC59A-25](#) [CG-C6A-MF](#) [CG-C6-MF](#) [CGDVIMM-10](#) [CGSVGAMM-10](#)
[CIB24-05M](#) [CIB24-1M](#) [CIB24-2M](#)