



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|---|------------|------------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 10/21/2016 | DFRISIELLO |
| B | ECN 8696: ADD P/N'S -1,-3 AND -75 | 03/28/2017 | SLI |
| C | ECN 9633: ADDED LENGTHS 15, 125, 150, 175, 200, 225, 250 FT | 01/15/2019 | DFRISIELLO |

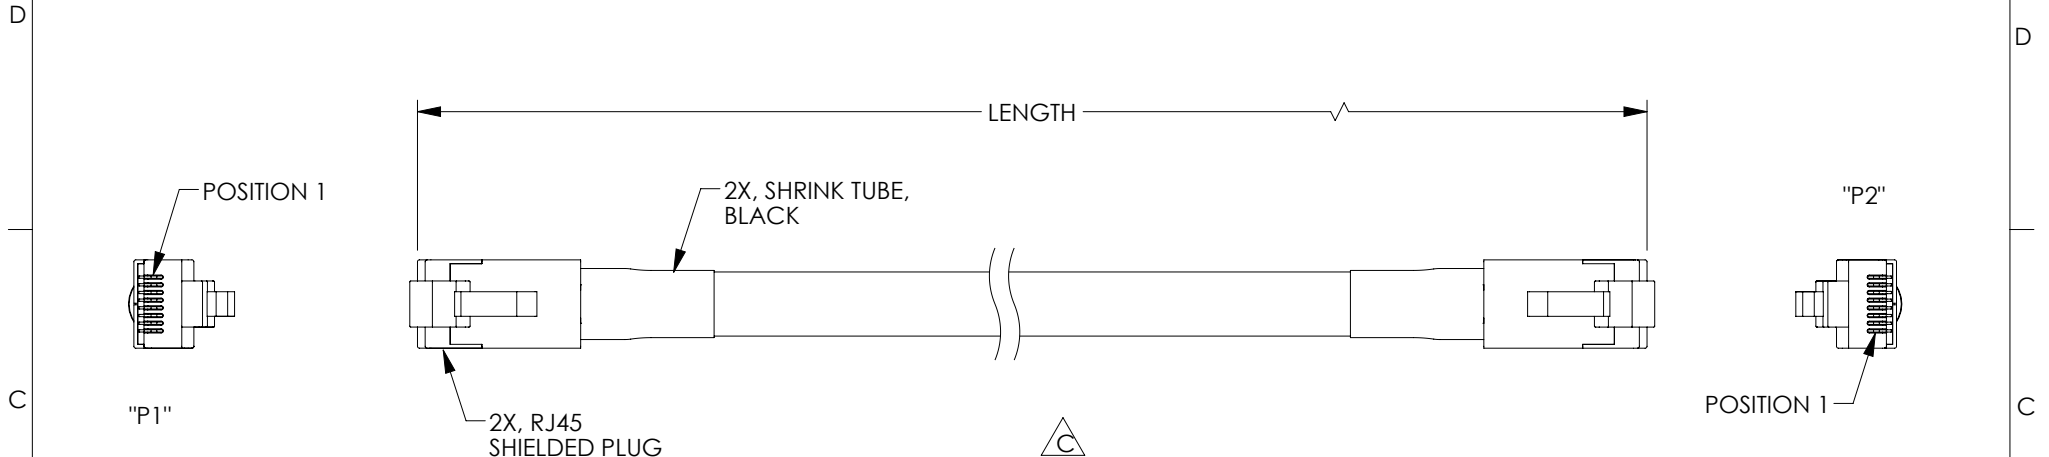

| MODEL NUMBER | LENGTH | |
|----------------|--------|--------|
| | FEET | METERS |
| TRD695AODS-1 | 1.0 | 0.30 |
| TRD695AODS-3 | 3.0 | 0.91 |
| TRD695AODS-5 | 5.0 | 1.52 |
| TRD695AODS-10 | 10.0 | 3.05 |
| TRD695AODS-15 | 15.0 | 4.57 |
| TRD695AODS-25 | 25.0 | 7.62 |
| TRD695AODS-50 | 50.0 | 15.24 |
| TRD695AODS-75 | 75.0 | 22.86 |
| TRD695AODS-100 | 100.0 | 30.48 |
| TRD695AODS-125 | 125.0 | 38.10 |
| TRD695AODS-150 | 150.0 | 45.72 |
| TRD695AODS-175 | 175.0 | 53.34 |
| TRD695AODS-200 | 200.0 | 60.96 |
| TRD695AODS-225 | 225.0 | 68.58 |
| TRD695AODS-250 | 250.0 | 76.20 |

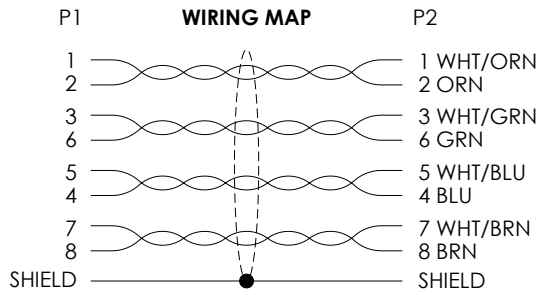

NOTES:

MATERIAL:
 PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
 CONTACTS: PHOSPHOR BRONZE.
 PLUG SHIELDING: BRASS
 CABLE JACKET: LINEAR LOW-DENSITY POLYETHYLENE, BLACK, (LLDPE)

FINISH:
 CONTACTS: 50 μINCHES GOLD IN CONTACT AREA
 OVER 100 μINCHES NICKEL PLATE OVERALL.
 PLUG SHIELDING: NICKEL PLATED

CABLE CHARACTERISTICS:
 CAT 6A, SHIELDED FOUR TWISTED PAIRS MODULAR CORD,
 23 AWG SOLID BARE COPPER CONDUCTORS WITH
 ALUM/POLY FOIL TAPE, PE TAPE, AND DRAIN WIRE.
 INNER JACKET: PVC, GRAY
 OUTER JACKET: UV RESISTANT, DIRECT BURIAL, OUTDOOR JACKET.

MISCELLANEOUS:
 LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
 OPERATING TEMPERATURE RANGE: -40°C TO +70°C.
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN
 ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

| | | | | |
|--|--|--|--|------------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% | APPROVALS | DATE | 50 HIGH STREET NORTH ANDOVER, MA 01845 | |
| | DRAWN BY DFRISIELLO | 10/04/2016 | | |
| ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.13] | APPROVED BY DGUTTADAUR | 10/21/2016 | CATEGORY TELECOM/MODULAR | |
| | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | PRODUCT DESCRIPTION RJ45 C6a F/UTP 23SLD LLDPE CMX BLK OTDR | | |
| PROJECTION | COLOR VARIATIONS MAY OCCUR | SIZE A | FSCM NO. 43321 | DWG. NO. TRD695AODS |
| | | SCALE: NONE | CAD FILE: TRD695AODS.SLDDRW | REV. C |
| | | | SHEET 1 OF 1 | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [L-Com manufacturer](#):

Other Similar products are found below :

[27-500-010](#) [AL-ECF504-AB](#) [ANM-1406](#) [AOCQP28100-007](#) [AOCQSP40-010](#) [AOCSP10-002](#) [BA35FF](#) [BAK400](#) [BC030B](#) [BC030R](#) [BC25](#)
[BC40](#) [BC50](#) [BC55](#) [BTB5MD](#) [CA3A-90DA-05M](#) [CA3A-90LA-1M](#) [CA3A-90RA-05M](#) [CA3A-90RMICB-05M](#) [CA3N030](#) [CA3N050](#)
[CA90DA-90DB-03M](#) [CAPUSB-A](#) [CAPUSB-B](#) [CAP-WPRJ](#) [CA-RSPNMB010](#) [CASATAL-18](#) [CASATARL-12](#) [CAUALAL-1M](#)
[CAUALAL-2M](#) [CAUALAL-3M](#) [CAUALB-1M](#) [CAUBLKAA-2M](#) [CAUBLKAB-05M](#) [CAUBLKAB-1M](#) [CAUBLKAB-3M](#) [CAUBLKAB-](#)
[4M](#) [CAUBLKAB-5M](#) [CC58C-10](#) [CC58C-12](#) [CC58C-2](#) [CC58C-5](#) [CC59A-25](#) [CG-C6A-MF](#) [CG-C6-MF](#) [CGDVIMM-10](#) [CGSVGAMM-10](#)
[CIB24-05M](#) [CIB24-1M](#) [CIB24-2M](#)