



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/21/2016	DFRISIELLO
B	ECN 8696: ADD P/N'S -1,-3 AND -75	03/28/2017	SLI
C	ECN 9633: ADDED LENGTHS 15, 125, 150, 175, 200, 225, 250 FT	01/15/2019	DFRISIELLO

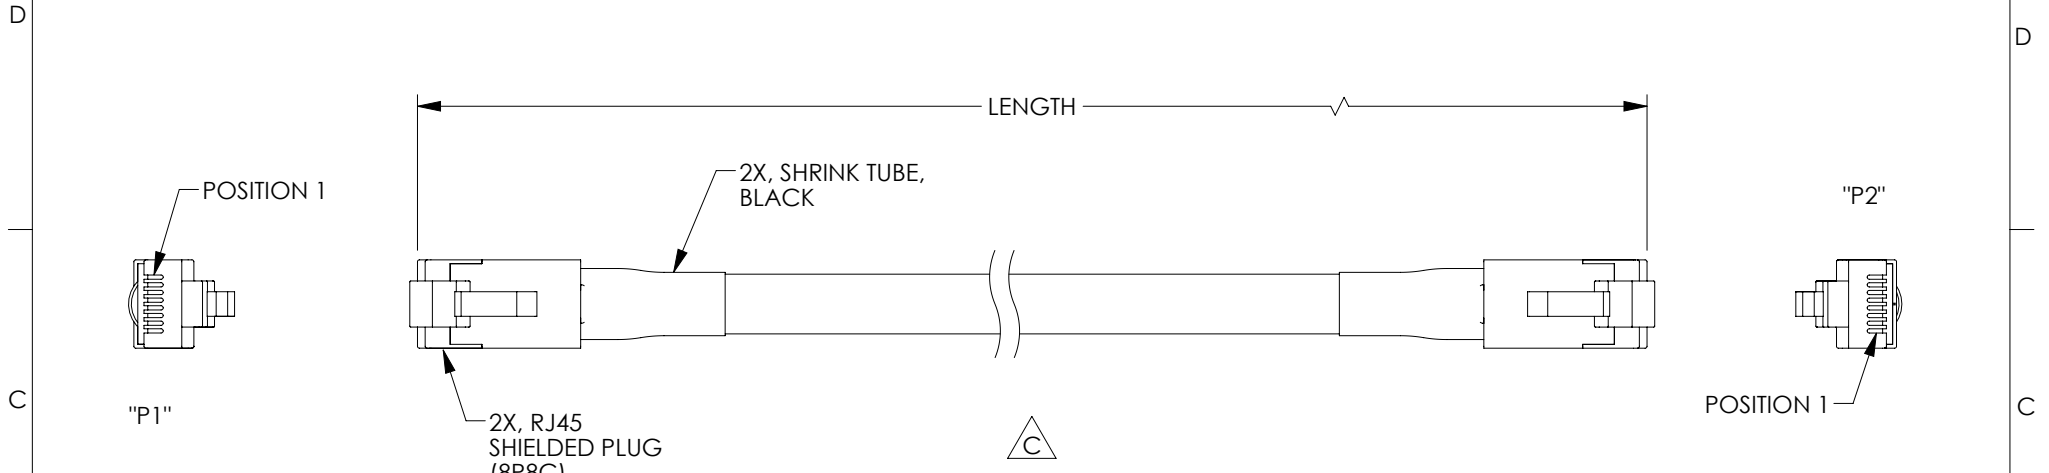

MODEL NUMBER	LENGTH	
	FEET	METERS
TRD695ODS-1	1.0	0.30
TRD695ODS-3	3.0	0.91
TRD695ODS-5	5.0	1.52
TRD695ODS-10	10.0	3.05
TRD695ODS-15	15.0	4.57
TRD695ODS-25	25.0	7.62
TRD695ODS-50	50.0	15.24
TRD695ODS-75	75.0	22.86
TRD695ODS-100	100.0	30.48
TRD695ODS-125	125.0	38.10
TRD695ODS-150	150.0	45.72
TRD695ODS-175	175.0	53.34
TRD695ODS-200	200.0	60.96
TRD695ODS-225	225.0	68.58
TRD695ODS-250	250.0	76.20

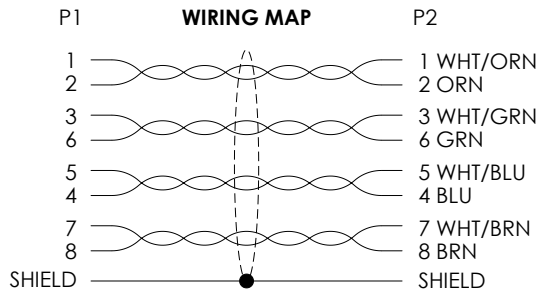

NOTES:

MATERIAL:

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
 CONTACTS: PHOSPHOR BRONZE.
 PLUG SHIELDING: BRASS
 CABLE JACKET: LINEAR LOW-DENSITY POLYETHYLENE, BLACK, (LLDPE)

FINISH:

CONTACTS: 50 μINCHES GOLD IN CONTACT AREA
 OVER 100 μINCHES NICKEL PLATE OVERALL.
 PLUG SHIELDING: NICKEL PLATED

CABLE CHARACTERISTICS:

CAT 6, SHIELDED FOUR TWISTED PAIRS MODULAR CORD,
 23 AWG SOLID BARE COPPER CONDUCTORS WITH
 ALUM/POLY FOIL TAPE, PE TAPE, WATER BLOCK TAPE,
 AND DRAIN WIRE.
 UV RESISTANT, DIRECT BURIAL, OUTDOOR JACKET.

MISCELLANEOUS:

LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
 OPERATING TEMPERATURE RANGE: -40°C TO +70°C.
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN
 ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE			50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY DFRISIELLO	10/03/2016			CATEGORY TELECOM/MODULAR
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	CHECKED BY JWhite	10/03/2016	PRODUCT DESCRIPTION RJ45 C6 F/UTP PE BLK		
PROJECTION 	APPROVED BY DGUTTADAUR	10/21/2016	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A	FSCM NO. 43321
	COLOR VARIATIONS MAY OCCUR		SCALE: NONE	DWG. NO. TRD695ODS	REV. C
			CAD FILE: TRD695ODS.SLDDRW	SHEET 1 OF 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [L-Com](#) manufacturer:

Other Similar products are found below :

[27-500-010](#) [AL-ECF504-AB](#) [ANM-1406](#) [AOCQP28100-007](#) [AOCQSP40-010](#) [AOCSP10-002](#) [BA35FF](#) [BAK400](#) [BC030B](#) [BC030R](#) [BC25](#)
[BC40](#) [BC50](#) [BC55](#) [BTB5MD](#) [CA3A-90DA-05M](#) [CA3A-90LA-1M](#) [CA3A-90RA-05M](#) [CA3A-90RMICB-05M](#) [CA3N030](#) [CA3N050](#)
[CA90DA-90DB-03M](#) [CAPUSB-A](#) [CAPUSB-B](#) [CAP-WPRJ](#) [CA-RSPNMB010](#) [CASATAL-18](#) [CASATARL-12](#) [CAUALAL-1M](#)
[CAUALAL-2M](#) [CAUALAL-3M](#) [CAUALB-1M](#) [CAUBLKAA-2M](#) [CAUBLKAB-05M](#) [CAUBLKAB-1M](#) [CAUBLKAB-3M](#) [CAUBLKAB-](#)
[4M](#) [CAUBLKAB-5M](#) [CC58C-10](#) [CC58C-12](#) [CC58C-2](#) [CC58C-5](#) [CC59A-25](#) [CG-C6A-MF](#) [CG-C6-MF](#) [CGDVIMM-10](#) [CGSVGAMM-10](#)
[CIB24-05M](#) [CIB24-1M](#) [CIB24-2M](#)