

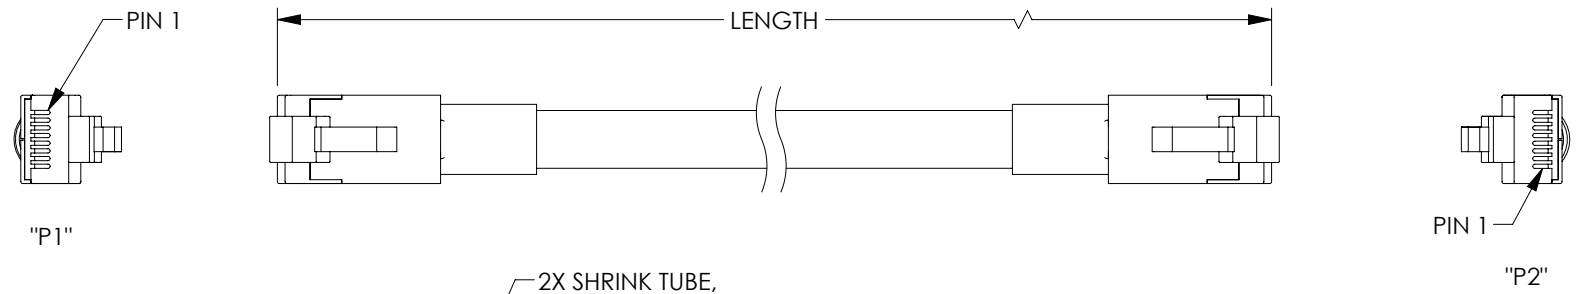


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/06/2018	DFRISIELLO

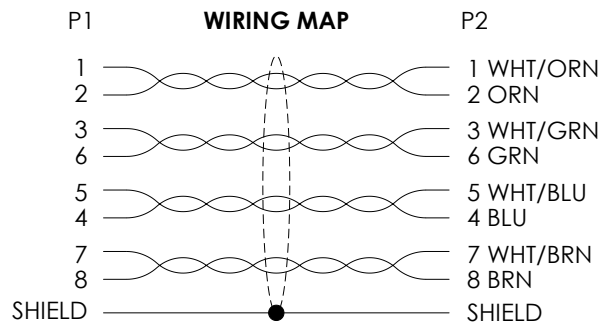

MODEL NUMBER	LENGTH FEET [METERS]
TRD824HFO-BLK-1	1.0 [0.30]
TRD824HFO-BLK-3	3.0 [0.91]
TRD824HFO-BLK-5	5.0 [1.52]
TRD824HFO-BLK-10	10.0 [3.05]
TRD824HFO-BLK-15	15.0 [4.57]
TRD824HFO-BLK-25	25.0 [7.62]
TRD824HFO-BLK-50	50.0 [15.24]
TRD824HFO-BLK-75	75.0 [22.86]
TRD824HFO-BLK-100	100.0 [30.48]
TRD824HFO-BLK-150	150.0 [45.72]
TRD824HFO-BLK-200	200.0 [60.96]
TRD824HFO-BLK-250	250.0 [76.20]

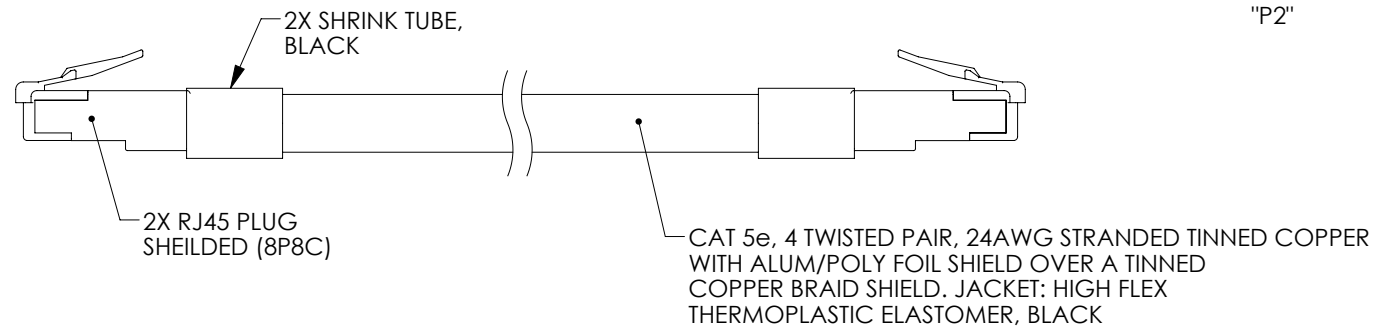

**NOTES:**  
 CABLE CHARACTERISTICS:  
 FLEX LIFE: 1 MILLION CYCLE TEST (10X CABLE O.D. MIN. RAD.)  
 10 MILLION CYCLE TEST (20X CABLE O.D. MIN. RAD.)  
 TEMPERATURE RATING: -40°C TO +75°C  
 VOLTAGE RATING: 600 V  
 POE COMPLIANT (802.3af) TO 80 METERS WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184.  
 FLAME RATING: CMX/CM OUTDOOR  
 CABLE JACKET IS WELD SPATTER, SUNLIGHT (UV) AND CUTTING/MACHINING OIL RESISTANT.

1. PLUG CONFORMS TO TIA-1096
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY DFRISIELLO	12/04/2018		CATEGORY <b>TELECOM/MODULAR</b>
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]	CHECKED BY DGUTTADAUR	12/05/2018	PRODUCT DESCRIPTION <b>RJ45 C5e SF/UTP 24STR HF TPE BLK</b>	
PROJECTION 	APPROVED BY DGUTTADAUR	12/05/2018	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SCALE: NONE
	COLOR VARIATIONS MAY OCCUR		SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. TRD824HFO-BLK	REV. <b>A</b>
			CAD FILE: TRD824HFO-BLK.SLDDRW	SHEET 1 OF 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [L-Com](#) manufacturer:*

Other Similar products are found below :

[27-500-010](#) [AL-ECF504-AB](#) [ANM-1406](#) [AOCQP28100-007](#) [AOCQSP40-010](#) [AOCSP10-002](#) [BA35FF](#) [BAK400](#) [BC030B](#) [BC030R](#) [BC25](#)  
[BC40](#) [BC50](#) [BC55](#) [BTB5MD](#) [CA3A-90DA-05M](#) [CA3A-90LA-1M](#) [CA3A-90RA-05M](#) [CA3A-90RMICB-05M](#) [CA3N030](#) [CA3N050](#)  
[CA90DA-90DB-03M](#) [CAPUSB-A](#) [CAPUSB-B](#) [CAP-WPRJ](#) [CA-RSPNMB010](#) [CASATAL-18](#) [CASATARL-12](#) [CAUALAL-1M](#)  
[CAUALAL-2M](#) [CAUALAL-3M](#) [CAUALB-1M](#) [CAUBLKAA-2M](#) [CAUBLKAB-05M](#) [CAUBLKAB-1M](#) [CAUBLKAB-3M](#) [CAUBLKAB-](#)  
[4M](#) [CAUBLKAB-5M](#) [CC58C-10](#) [CC58C-12](#) [CC58C-2](#) [CC58C-5](#) [CC59A-25](#) [CG-C6A-MF](#) [CG-C6-MF](#) [CGDVIMM-10](#) [CGSVGAMM-10](#)  
[CIB24-05M](#) [CIB24-1M](#) [CIB24-2M](#)