

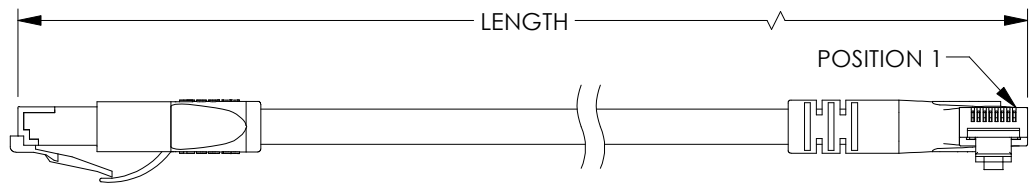



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	02/28/18	JLABOY

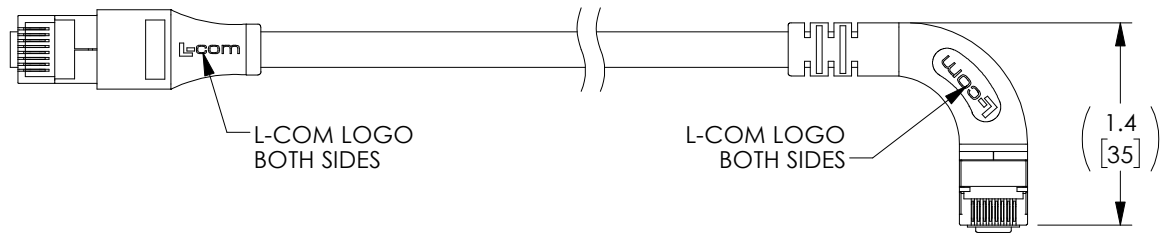

**P1**  
SHIELDED RJ45 MODULAR PLUG  
GOLD PLATED CONTACTS  
(8P8C)

**P2**  
SHIELDED RJ45 MODULAR PLUG  
GOLD PLATED CONTACTS  
(8P8C)

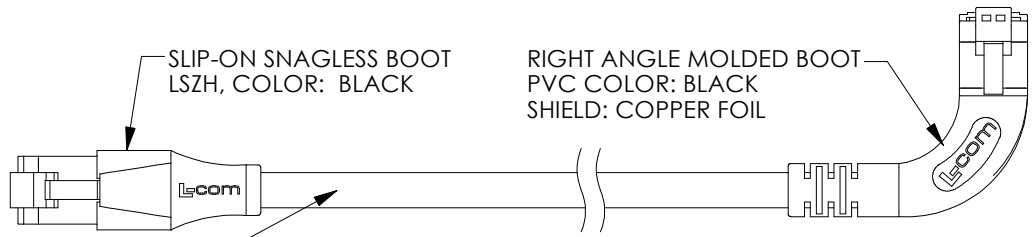


**SLIP-ON SNAGLESS BOOT**  
LSZH, COLOR: BLACK

**RIGHT ANGLE MOLDED BOOT**  
PVC COLOR: BLACK  
SHIELD: COPPER FOIL

**HIGH FLEX, CAT5e CABLE**  
CONDUCTOR: FOUR TWISTED PAIR, 26AWG STRANDED TINNED COPPER  
SHIELD: TINNED COPPER BRAIDED  
CABLE JACKET: PU, DARK BLUE, NOM DIA .228[5.80]  
OPERATING TEMPERATURE RANGE: -20°C TO +80°C

PART NUMBER	LENGTH	
	FEET	METERS
TRD855SRA7DBL-05M	1.64	0.5
TRD855SRA7DBL-1M	3.28	1.0
TRD855SRA7DBL-2M	6.56	2.0
TRD855SRA7DBL-3M	9.84	3.0
TRD855SRA7DBL-4M	13.12	4.0
TRD855SRA7DBL-5M	16.41	5.0
TRD855SRA7DBL-10M	32.82	10.0

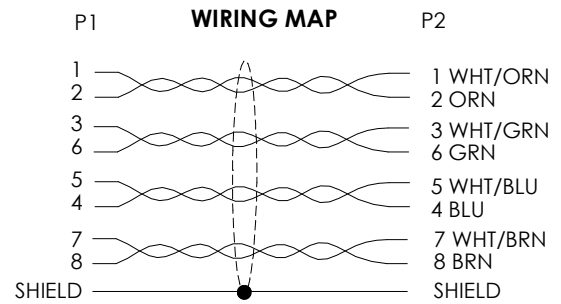

- NOTES:**
1. PLUG CONFORMS TO TIA-1096
  2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE
	DRAWN BY D.CUI	02/03/18
	CHECKED BY W.LI	02/03/18
	APPROVED BY S.PAN	02/03/18
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	

**L-com** Global Connectivity  
50 HIGH STREET  
NORTH ANDOVER, MA  
01845

CATEGORY: TELECOM/MODULAR

PRODUCT DESCRIPTION: C5e RJ45 S/UTP STR-RGT 26STR PUR HIFLX DBLU

SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. TRD855SRA7DBL	REV. <b>A</b>
------------------	--------------------------	---------------------------	------------------

SCALE: NONE | CAD FILE: TRD855SRA7DBL.SLDRW | SHEET 1 OF 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [L-Com](#) manufacturer:*

Other Similar products are found below :

[27-500-010](#) [AL-ECF504-AB](#) [ANM-1406](#) [AOCQP28100-007](#) [AOCQSP40-010](#) [AOCSP10-002](#) [BA35FF](#) [BAK400](#) [BC030B](#) [BC030R](#) [BC25](#)  
[BC40](#) [BC50](#) [BC55](#) [BTB5MD](#) [CA3A-90DA-05M](#) [CA3A-90LA-1M](#) [CA3A-90RA-05M](#) [CA3A-90RMICB-05M](#) [CA3N030](#) [CA3N050](#)  
[CA90DA-90DB-03M](#) [CAPUSB-A](#) [CAPUSB-B](#) [CAP-WPRJ](#) [CA-RSPNMB010](#) [CASATAL-18](#) [CASATARL-12](#) [CAUALAL-1M](#)  
[CAUALAL-2M](#) [CAUALAL-3M](#) [CAUALB-1M](#) [CAUBLKAA-2M](#) [CAUBLKAB-05M](#) [CAUBLKAB-1M](#) [CAUBLKAB-3M](#) [CAUBLKAB-](#)  
[4M](#) [CAUBLKAB-5M](#) [CC58C-10](#) [CC58C-12](#) [CC58C-2](#) [CC58C-5](#) [CC59A-25](#) [CG-C6A-MF](#) [CG-C6-MF](#) [CGDVIMM-10](#) [CGSVGAMM-10](#)  
[CIB24-05M](#) [CIB24-1M](#) [CIB24-2M](#)