

RITA-WAS

Asymmetric beam for wall-washing

TECHNICAL SPECIFICATIONS:

31.9 x 28.4 mm **Dimensions** Height 17.1 mm glue, pin Fastening **ROHS** compliant yes 🕕



MATERIAL SPECIFICATIONS:

Component Colour **Finish Type** Material Coating **RITA-WAS** Reflector **HRPC** white


ORDERING INFORMATION:

Component Qty in box MOQ MPQ Box weight (kg)

900 C12516_RITA-WAS 360 60 8.0

» Box size:

LEDIL®

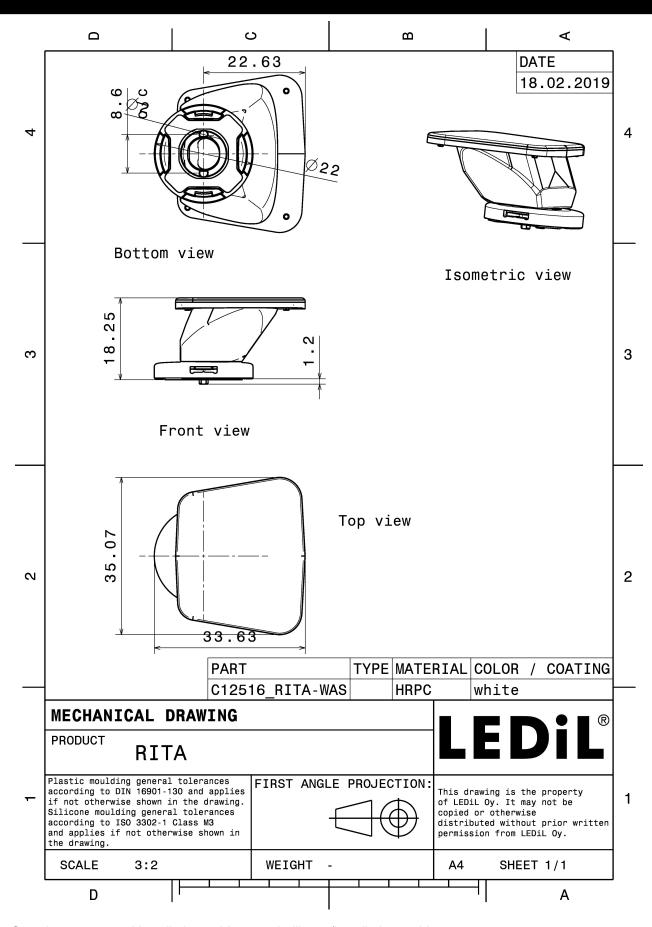

See also our general installation guide: www.ledil.com/installation_guide

Published: 31/01/2019



CREE \$\text{LED}


LED XM-L
FWHM / FWTM Asymmetric
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



CREE - LED

LED XM-L2
FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:





CREE - LED

LED XP-E
FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



CREE - LED

LED XP-G
FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:





CREE . LED

LED XP-G2
FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



CREE - LED


LED XT-E
FWHM / FWTM Asymmetric
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



DESCRIPTION LUMILEDS

LED LUXEON A
FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:






DESCRIPTION LUMILEDS

LED LUXEON M/MX
FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:





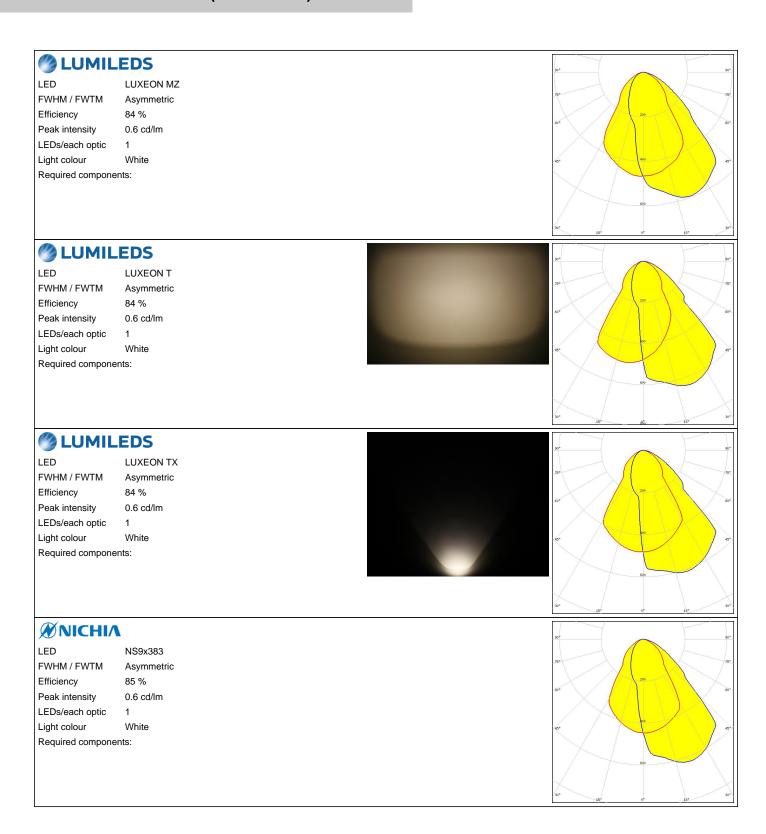






Required components:

LED NVSxx19B/NVSxx19C

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 83 % 0.6 cd/lm Peak intensity LEDs/each optic Light colour White



OSRAM Opto Semiconductors

LED OSLON Square EC FWHM / FWTM Asymmetric Efficiency 84 % Peak intensity 0.7 cd/lm LEDs/each optic 1 White Light colour Required components:





PHOTOMETRIC DATA (SIMULATED):




LED LUXEON H50-2

FWHM / FWTM Asymmetric

Efficiency %
LEDs/each optic 1

Light colour White

Required components:





PRODUCT DATASHEET C12516_RITA-WAS

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Reflectors category:

Click to view products by Ledil manufacturer:

Other Similar products are found below:

LL04CR-CFN35155L02 LL04CR-CFN60155L02 LL04CR-CGM85135L02 F13185_GERI-RZ 10604 LL01SP-ATH15R49 10170 12527

12531 12568 C13253_TINA2-R-CLIP16 CA14591_BROOKE-XW F15560_MIRELLA-G2-W CA11525_LAURA-R-W 12796 LMH020
REFL-0000-0000062 LMH020-REFL-0000-0000082 C12606_LENINA-DL CN12711_LENINA-W-DL C11394_TYRA-S C11396_TYRA
W C11508_BROOKE-W C11552_BARBARA-S C11553_BARBARA-W C11862_MINNIE-W C11979_LENA-S C11980_LENA-W

C11996_LENA-LENS C12083_BROOKE-SCR-M C12095_MINNIE-M C12097_MINNIE-WWW C12154_LENA-M C12469_LISA2-R
PIN C12476_MIRELLA-50-S C12477_MIRELLA-50-M C12480_MIRELLA-50-S-PIN C12516_RITA-WAS C12597_LENINA-S

C12599_LENINA-W C12948_LENA-WAS C12958_LENINA-XW C13085_MIRELLA-50-S-PF C13087_MIRELLA-50-W-PF

C13101_LENA-X-WAS C13555_BRIDGET-W-UNI C13556_BRIDGET-M-UNI C13557_BRIDGET-S-UNI C14346_ANGELETTE-WAS

C17099_ALISE-50-DL C17095_ALISE-70-CL