

## ALISE-70-M

~24° medium beam

## **TECHNICAL SPECIFICATIONS:**

Ø 70.0 mm **Dimensions** Height 42 mm yes 🕕 **ROHS** compliant



Box weight (kg)

## **MATERIAL SPECIFICATIONS:**

Colour **Finish** Component **Type** Material Coating ALISE-70-M Reflector Aluminium Anodized metal


### **ORDERING INFORMATION:**

Component Qty in box MOQ MPQ

500 100 C16904\_ALISE-70-M 25 8.7 » Box size: 410 x 335 x 200 mm



# PRODUCT DATASHEET C16904\_ALISE-70-M

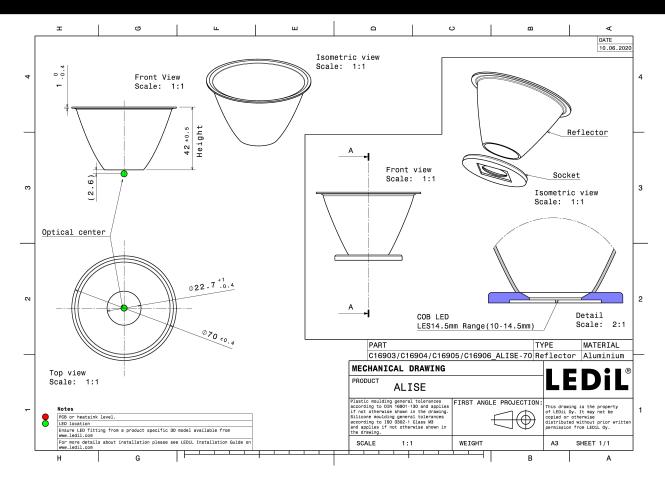

See also our general installation guide: www.ledil.com/installation\_guide


Published: 20/06/2019




## PHOTOMETRIC DATA (SIMULATED):



LED V13 Gen7
FWHM / FWTM 22.0° / 46.0°
Efficiency 92 %
Peak intensity 4.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:






# **CITIZEN**

LED CLL03x/CLU03x
FWHM / FWTM 28.0° / 60.0°
Efficiency 74 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:


Required components: C17098\_ALISE-70-DL



# **CITIZEN**

LED CLL03x/CLU03x
FWHM / FWTM 22.0° / 48.0°
Efficiency 91 %
Peak intensity 4.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:






## **DESCRIPTION** LUMILEDS

LED LUXEON CoB 1204/1205

FWHM / FWTM 24.0° / 50.0°
Efficiency 83 %
Peak intensity 3.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:






## PHOTOMETRIC DATA (SIMULATED):



LED LUXEON CoB 1204/1205

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 22.0° / 44.0° Efficiency 92 % Peak intensity 4.5 cd/lm LEDs/each optic Light colour White

Required components:

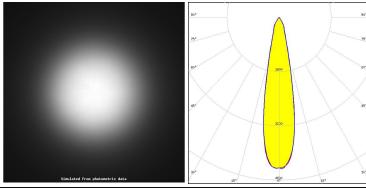


## LUMILEDS

LED LUXEON CoB 1208 FWHM / FWTM 28.0° / 60.0° Efficiency 74 % Peak intensity 2.3 cd/lm

LEDs/each optic 1 White Light colour


Required components: C17098\_ALISE-70-DL



## LUMILEDS

LED LUXEON CoB 1208 FWHM / FWTM 24.0° / 50.0° Efficiency 92 % Peak intensity 4 cd/lm


LEDs/each optic 1 Light colour White Required components:

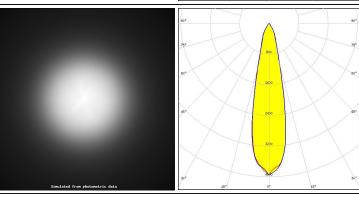

# **SAMSUNG**

LC016D / LC019D / LC026D / LC033D


FWHM / FWTM 26.0° / 54.0° Efficiency 91 % Peak intensity 3.7 cd/lm LEDs/each optic White Light colour Required components:



Published: 20/06/2019



## PHOTOMETRIC DATA (SIMULATED):

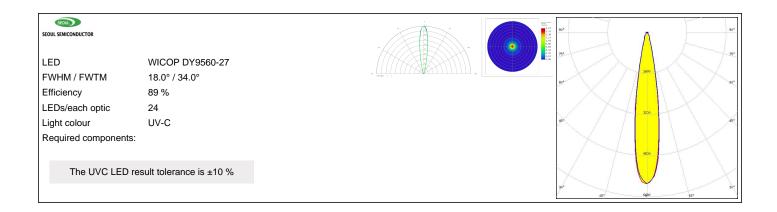



# PRODUCT DATASHEET C16904\_ALISE-70-M

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

# Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

# Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

www.ledil.com/ where\_to\_buy

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Reflectors category:

Click to view products by Ledil manufacturer:

Other Similar products are found below:

LL04CR-CFN35155L02 LL04CR-CFN60155L02 LL04CR-CGM85135L02 F13185\_GERI-RZ 10604 LL01SP-ATH15R49 10170 12527

12531 12568 C13253\_TINA2-R-CLIP16 CA14591\_BROOKE-XW F15560\_MIRELLA-G2-W CA11525\_LAURA-R-W 12796 LMH020
REFL-0000-0000062 LMH020-REFL-0000-0000082 C12606\_LENINA-DL CN12711\_LENINA-W-DL C11394\_TYRA-S C11396\_TYRA-W C11508\_BROOKE-W C11552\_BARBARA-S C11553\_BARBARA-W C11862\_MINNIE-W C11979\_LENA-S C11980\_LENA-W

C11996\_LENA-LENS C12083\_BROOKE-SCR-M C12095\_MINNIE-M C12097\_MINNIE-WWW C12154\_LENA-M C12469\_LISA2-R-PIN C12476\_MIRELLA-50-S C12477\_MIRELLA-50-M C12480\_MIRELLA-50-S-PIN C12516\_RITA-WAS C12597\_LENINA-S

C12599\_LENINA-W C12948\_LENA-WAS C12958\_LENINA-XW C13085\_MIRELLA-50-S-PF C13087\_MIRELLA-50-W-PF

C13101\_LENA-X-WAS C13555\_BRIDGET-W-UNI C13556\_BRIDGET-M-UNI C13557\_BRIDGET-S-UNI C14346\_ANGELETTE-WAS C17099\_ALISE-50-DL C17095\_ALISE-70-CL