

ILONA-ZOOM

PATENT PENDING - An infinitely adjustable beam from 13 to 48 degrees.

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 52.5 mm
Height	33.2 mm
Fastening	socket
ROHS compliant	yes 🕕



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
C17295_ILONA-ZOOM	Single lens	PMMA	clear	
C17296_ILONA-ZOOM-SUB	Sublens	PMMA	clear	

ORDERING INFORMATION:

Quantities for one set:


Single lens 1
Sublens 1



PRODUCT DATASHEET ILONA-ZOOM

Component		Qty in box	MOQ	MPQ	Box weight (kg)
C17295_ILONA-ZOOM » Box size: 480 x 280 x 300 mm	Single lens	264	33	33	9.7
C17296_ILONA-ZOOM-SUB » Box size: 480 x 280 x 185 mm	Sublens	264	33	33	2.4


PRODUCT DATASHEET ILONA-ZOOM

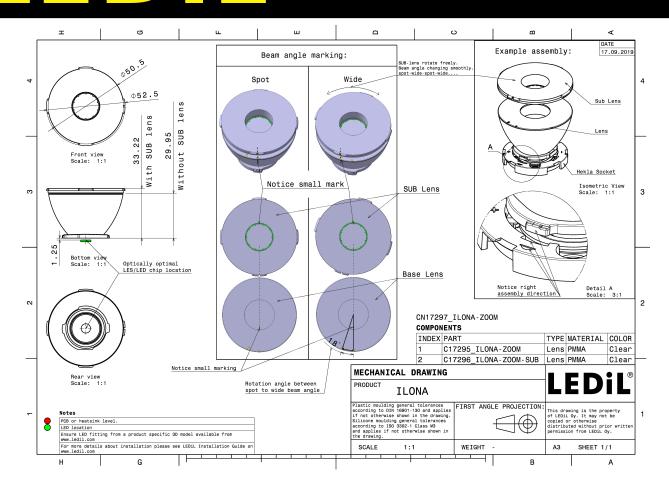

See also our general installation guide: www.ledil.com/installation_guide

3/13



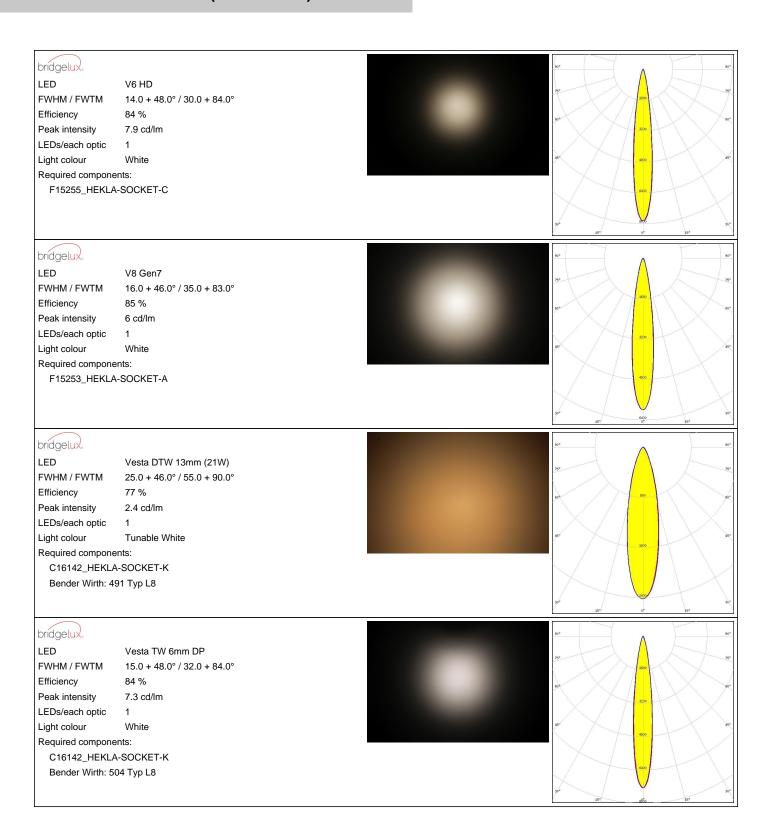



bridgelux


LED Vesta TW 9mm (9W) DP $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ $19.0 + 46.0^{\circ} / 42.0 + 86.0^{\circ}$

Efficiency 81 % Peak intensity 4.2 cd/lm LEDs/each optic

Light colour Tunable White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 489 Typ L8




CITIZEN

LED CLL02x/CLU02x (LES10) FWHM / FWTM 21.0 + 47.0° / 42.0 + 86.0°

Efficiency 85 % Peak intensity 4.2 cd/lm LEDs/each optic 1 White Light colour Required components:

F15255_HEKLA-SOCKET-C




CITIZEN

LED CLU712

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ $19.0 + 47.0^{\circ} / 37.0 + 84.0^{\circ}$

Efficiency 85 % Peak intensity 5.2 cd/lm LEDs/each optic Light colour White Required components: F15859_HEKLA-SOCKET-I






CREE - LED

CMA1516

FWHM / FWTM 19.0 + 47.0° / 39.0 + 85.0°

Efficiency 85 % Peak intensity 4.6 cd/lm LEDs/each optic White Light colour Required components: F15256_HEKLA-SOCKET-D







CREE - LED

LED CMT14xx

FWHM / FWTM 20.0 + 46.0° / 41.0 + 85.0°

Efficiency 85 %
Peak intensity 4.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

25°


MUMILEDS

LED LUXEON CX Plus CoB M02 / M03 (Gen2)

FWHM / FWTM 19.0 + 47.0° / 39.0 + 85.0°

Efficiency 86 %
Peak intensity 4.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:


F15256_HEKLA-SOCKET-D

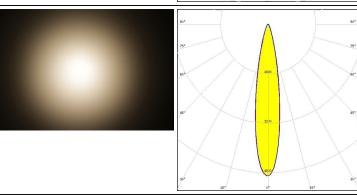

ELUMINUS

LED CxM-9 (13.5x13.5) FWHM / FWTM 20.0 + 46.0° / 41.0 + 85.0°

Efficiency 86 %
Peak intensity 4.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C




WNICHIA

LED COB L-Type (LES 9)

FWHM / FWTM 19.0 + 47.0° / 38.0 + 84.0°

Efficiency 85 %
Peak intensity 5.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15858_HEKLA-SOCKET-H








SAMSUNG

LC003D / LC006D / LC009D / LC013D

FWHM / FWTM $20.0 + 47.0^{\circ} / 42.0 + 85.0^{\circ}$

Efficiency 85 % Peak intensity 4.3 cd/lm LEDs/each optic Light colour White Required components:

F15255_HEKLA-SOCKET-C

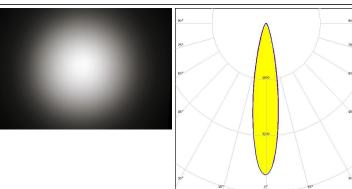


SAMSUNG

LED LC010C G2

FWHM / FWTM 14.0 + 48.0° / 30.0 + 84.0°

Efficiency 88 % Peak intensity 8.5 cd/lm LEDs/each optic 1 White Light colour Required components:

F15255_HEKLA-SOCKET-C

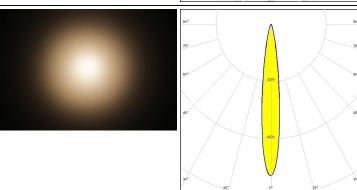


SEOUL

LED MJT COB LES 6

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 14.0 + 48.0° / 30.0 + 85.0°

Efficiency 84 % Peak intensity 1.1 cd/lm LEDs/each optic Light colour White Required components: F17435_HEKLA-G2-C






SEOUL SEOUL SEMICONDUCTOR

MJT COB LES 9.8 LED

FWHM / FWTM 21.0 + 47.0° / 43.0 + 86.0°

Efficiency 86 % Peak intensity 4.2 cd/lm LEDs/each optic White Light colour Required components: F15255_HEKLA-SOCKET-C







XICATO


XOB 9.8 mm

FWHM / FWTM 19.0 + 47.0° / 40.0 + 85.0°

Efficiency 86 % Peak intensity 4.8 cd/lm LEDs/each optic 1 Light colour White Required components:

F15255_HEKLA-SOCKET-C







bridgelux

LED V4 HD


 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 12.0 + 46.0° / 25.0 + 76.0°

Efficiency 82 % Peak intensity 12.3 cd/lm LEDs/each optic

Light colour White

Required components:

F15253_HEKLA-SOCKET-A




bridgelux.

LED V9 HD

FWHM / FWTM 18.0 + 46.0° / 34.0 + 82.0°

Efficiency 88 % Peak intensity 6.2 cd/lm LEDs/each optic 1 White Light colour Required components:

F15859_HEKLA-SOCKET-I



CITIZEN


LED CLL03x/CLU03x

FWHM / FWTM 25.0 + 46.0° / 51.0 + 92.0°

Efficiency 85 % Peak intensity 2.8 cd/lm LEDs/each optic 1 Light colour White

Required components:

F15859_HEKLA-SOCKET-I




CITIZEN

CLU700/701/702

FWHM / FWTM 13.0 + 47.0° / 27.0 + 78.0°

Efficiency 82 % Peak intensity 10 cd/lm LEDs/each optic White Light colour Required components:

F15255_HEKLA-SOCKET-C





CITIZEN

CLU7A2 (LES 4.2mm)


FWHM / FWTM 13.0 + 48.0° / 26.0 + 83.0°

Efficiency 88 % Peak intensity 10.1 cd/lm

LEDs/each optic Light colour White

Required components:

F15255_HEKLA-SOCKET-C




CREE + LED

LED CXA/B 13xx

FWHM / FWTM 14.0 + 47.0° / 28.0 + 80.0°

Efficiency 90 % Peak intensity 9.6 cd/lm LEDs/each optic 1 White Light colour Required components:

F15956_HEKLA-SOCKET-J



CREE + LED


LED CXA/B 15xx

FWHM / FWTM $18.0 + 46.0^{\circ} / 36.0 + 81.0^{\circ}$

Efficiency 89 % Peak intensity 5.5 cd/lm LEDs/each optic 1 Light colour White

Required components:

F15256_HEKLA-SOCKET-D




MUMILEDS

LED LUXEON CoB 1202/1203

FWHM / FWTM 20.0 + 44.0° / 37.0 + 80.0°

Efficiency 87 % Peak intensity 5.3 cd/lm LEDs/each optic White Light colour

Required components: F17437_HEKLA-G2-H





LUMILEDS


LED LUXEON CoB 1204/1205

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 24.0 + 46.0° / 50.0 + 95.0°

Efficiency 85 % Peak intensity 2.9 cd/lm LEDs/each optic Light colour White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 437 Typ L8




ELUMINUS

LED CxM-6 (13.5x13.5)

FWHM / FWTM 14.0 + 46.0° / 30.0 + 81.0°

Efficiency 90 % Peak intensity 8.6 cd/lm LEDs/each optic 1 White Light colour

Required components: F17435_HEKLA-G2-C




WNICHIA

LED COB S-Type (LES 7) FWHM / FWTM 16.0 + 48.0° / 30.0 + 80.0°

Efficiency 89 % Peak intensity 7.9 cd/lm LEDs/each optic 1

Light colour White Required components:

F15848_HEKLA-SOCKET-G




WNICHIA

LED NCSxE17A

FWHM / FWTM 13.0 + 47.0° / 27.0 + 75.0°

Efficiency 88 % Peak intensity 10 cd/lm LEDs/each optic White Light colour

Required components:





SAMSUNG


LED LC010T (Tunable White)

FWHM / FWTM 18.0 + 46.0° / 34.0 + 83.0°

Efficiency 88 %
Peak intensity 6.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8




SAMSUNG

LED LC020C

FWHM / FWTM 14.0 + 46.0° / 28.0 + 77.0°

Efficiency 88 %
Peak intensity 9.2 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17438_HEKLA-G2-I




SAMSUNG

LED LC020T (Tunable white)
FWHM / FWTM 22.0 + 46.0° / 42.0 + 85.0°

Efficiency 86 %
Peak intensity 4.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8




TRIDONIC

LED SLE G7 LES13

FWHM / FWTM 12.0 + 45.0° / 21.0 + 71.0°

Efficiency 88 %
Peak intensity 16.3 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17438_HEKLA-G2-I





GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Lenses category:

Click to view products by Ledil manufacturer:

Other Similar products are found below:

LL01ED-AK40L06 LL01ZZ-EX25L06-M2 180182-0000 LL01ED-AL155R49 C14707_IDA16-O C12231_LENA-FRESNEL-LENS
LL01ED-AKY24R49 LL01CR-AYG15R49 LL01CR-OT32L06-M2 LL01ZZ-AAA24L49 LL01CR-CEN38L02 LL01ZZ-AAA55L49
LL01CR-AYG24R49 LL01A00CZMB2-M2 LL01ED-AKY38R49 LL01CR-CNE2545L06-M2 LL01ZZ-AAA38L49 LL01ED-AKV36R49
LL01ED-AL124R49 LL01CR-AYG38R49 C17171_DAISY-8X1-SHD-MATT F16859_LINDA-ZT25 C17295_ILONA-ZOOM
F16636_LINDA-W60 C17362_DAISY-7X1-W-D C17361_DAISY-7X1-WW-D 10003 10003/15 10048 10049 10108 10510
F14487_FLORENCE-1R-MAXI-WG 12667 C14165_STRADA-2X2-ME-WIDE2 C14605_HB-2X2-RW C14642_FLORENCE-1R-UP
CAY033 CAY046/55 FCX11157_RES-O-90 OS-LRI2015X45S OSOLRA2015M PG1C-NX36 PG1C-SX17 PM2A-SXV1 PM2B-NX55-AW PM6A-FN25 FC2231-0000-0050-L FC2231-0000-0100-L C14116 STRADA-2X2-PX