VICTORIA-MINI-W

~60° wide beam.

TECHNICAL SPECIFICATIONS:

Ø 180.0 mm **Dimensions** Height 10.8 mm Fastening screw **ROHS** compliant yes 🕕



MATERIAL SPECIFICATIONS:


Type Material Colour **Finish** Component **VICTORIA-MINI-W** Multi-lens **PMMA** clear gloss

ORDERING INFORMATION:

Component Qty in box MOQ MPQ Box weight (kg)

92 C17975_VICTORIA-MINI-W 92 9.8 » Box size: 400 x 400 x 275 mm



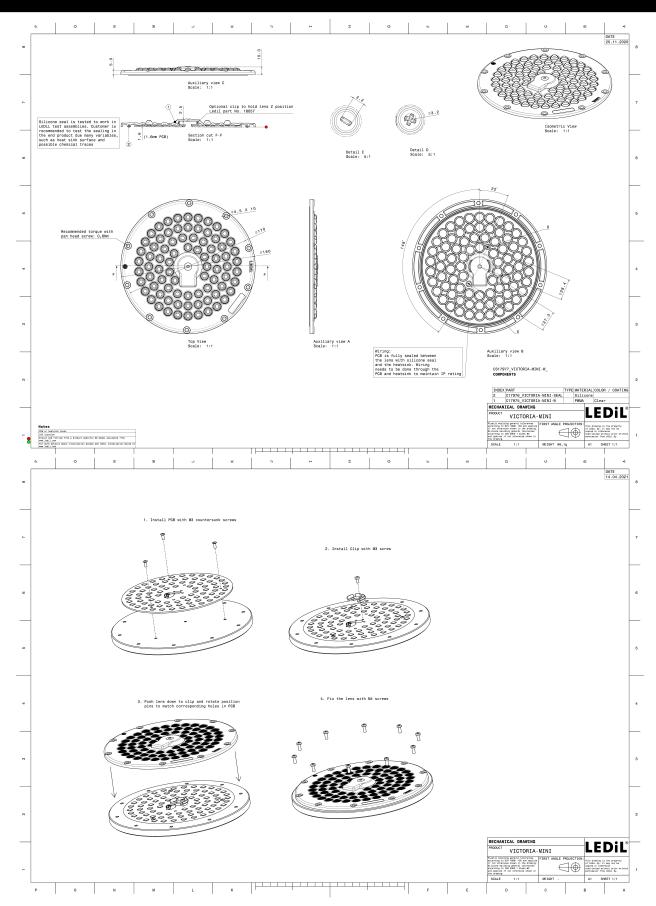

See also our general installation guide: www.ledil.com/installation_guide

2/6


PHOTOMETRIC DATA (MEASURED):

CREE \$\text{LED}

LED J Series 5050 Round LES

FWHM / FWTM 53.0° / 81.0°
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C18057_VICTORIA-MINI-CLIP




CREE - LED

LED J Series 5050 Square LES

FWHM / FWTM 55.0° / 83.0°
Efficiency 93 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:


C18057_VICTORIA-MINI-CLIP

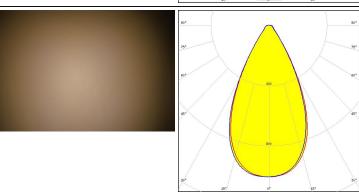

LUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM 53.0° / 80.0°
Efficiency 91 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

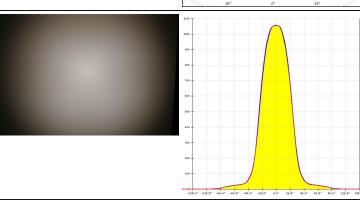


Your solutions

LED RdLED 150mm 7000lm 8x0 120V VICTORIA-MINI

FWHM / FWTM 56.0° / 86.0° / 86.0° Efficiency 91 % Peak intensity 0.9 cd/lm LEDs/each optic 2 Light colour White Required components:

C18057_VICTORIA-MINI-CLIP

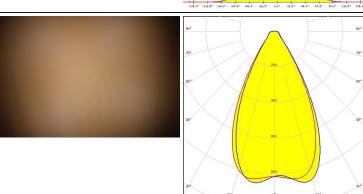

PHOTOMETRIC DATA (MEASURED):

SAMSUNG LED LM28xB Series FWHM / FWTM 56.0° / 86.0° Efficiency 91 % Peak intensity 0.9 cd/lm LEDs/each optic 2 Light colour White Required components: C18057_VICTORIA-MINI-CLIP



PHOTOMETRIC DATA (SIMULATED):



LED

J Series 3030

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$

41.0° / 68.0°

Efficiency Peak intensity

1.7 cd/lm


93 %

LEDs/each optic

Light colour

White

Required components:



OSRAM

LED

OSCONIQ S 5050

FWHM / FWTM

58.0° / 80.0°

Efficiency

91 %

Peak intensity

1 cd/lm


LEDs/each optic

1

Light colour

White

Required components:



SEOUL SEOUL SEMICONDUCTOR

LED

SEOUL DC 5050 6V

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$

58.0° / 80.0°

Efficiency

Peak intensity


91 %

1 cd/lm

LEDs/each optic

1 White

Light colour Required components:



Published: 09/07/2021



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

6/6

www.ledil.com/ where_to_buy

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Lenses category:

Click to view products by Ledil manufacturer:

Other Similar products are found below:

LL01ED-AK40L06 LL01ZZ-EX25L06-M2 180182-0000 LL01ED-ALI55R49 C14707_IDA16-O LL01ED-AKY24R49 LL01CR-AYG15R49 LL01CR-OT32L06-M2 LL01ZZ-AAA24L49 LL01CR-CEN38L02 LL01ZZ-AAA55L49 LL01CR-AYG24R49 LL01A00CZMB2-M2 LL01ED-AKY38R49 LL01CR-CNE2545L06-M2 LL01ZZ-AAA38L49 LL01ED-AKV36R49 LL01ED-ALI24R49 LL01CR-AYG38R49 C17171_DAISY-8X1-SHD-MATT F16859_LINDA-ZT25 C17295_ILONA-ZOOM F16636_LINDA-W60 C16871_DAISY-7X1-W C18165_AMY-35-ZOOM-SUB 10003 10003/15 10048 10049 10108 F14487_FLORENCE-1R-MAXI-WG 12667 C14605_HB-2X2-RW C14642_FLORENCE-1R-UP CAY033 CAY046/55 OS-LR12015X45S OSOLRA2015M PG1C-NX36 PG1C-SX17 PM2A-SXV1 PM2B-NX55-AW PM6A-FN25 FC2231-0000-0050-L FC2231-0000-0100-L C14116_STRADA-2X2-PX C12345_HB-5X1-W 95-0931 C15800_MOLLY-S C15802_MOLLY-W