

AMY-35-0

~20 + 50° oval beam

TECHNICAL SPECIFICATIONS:

Dimensions	Ømm
Height	0 mm
ROHS compliant	yes 🛈



MATERIAL SPECIFICATIONS:

Component AMY-35-O **Type** Single lens

Qty in box

1650

Material	Colour	Finish
PMMA		

MPQ

66

Box weight (kg)

10.1


MOQ

132

ORDERING INFORMATION:

Component C18491_AMY-35-O » Box size: 480 x 280 x 300 mm

PRODUCT DATASHEET C18491_AMY-35-O

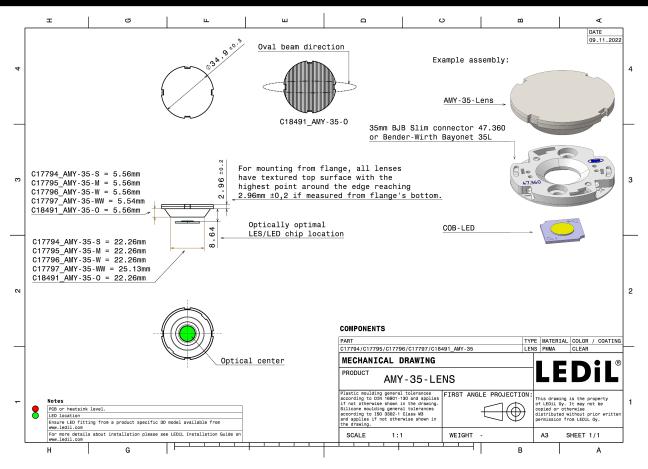

See also our general installation guide: www.ledil.com/installation_guide



PHOTOMETRIC DATA (SIMULATED):

bridgelux. LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components:	V4 HD Gen 7 58.0 + 17.0° / 84.0 + 32.0° 90 % 2.4 cd/lm 1 White	94 97 97 99 99 90 90 90 90 90 90 90 90 90 90 90
CITTIZEN LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components: BJB: 47.360.1020	CLU700/701/702/703 56.0 + 22.0° / 86.0 + 40.0° 90 % 1.9 cd/lm 1 White	99 ⁴ 99 ⁴ 99 ⁴ 66 ⁴ 66 ⁴ 90 800 90 ⁴ 90 ⁴
CITTIZEN LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components: BJB: 47.360.1020	CLU7A2/7A3 58.0 + 16.0° / 84.0 + 32.0° 90 % 2.4 cd/lm 1 White	5° 5° 5° 5° 5° 5° 5° 5° 5° 5° 5° 5° 5° 5



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd. # 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/

where_to_buy

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Lenses category:

Click to view products by Ledil manufacturer:

Other Similar products are found below :

LL01ZZ-EX25L06-M2 C12231_LENA-FRESNEL-LENS LL01CR-OT32L06-M2 LL01CR-CEN38L02 C17295_ILONA-ZOOM 2200001315 2200001328 10003 10003/15 10048 10049 10108 10510 12667 C14165_STRADA-2X2-ME-WIDE2 C14642_FLORENCE-1R-UP CAY046/55 OS-LR12015X45S OSOLRA2015M PG1C-NX36 PM2A-SXV1 FC2231-0000-0050-L FC2231-0000-0100-L 2328823-1 C14116_STRADA-2X2-PX OPC11WIDE OPAA-1-WSL OPK2-1-003 C11916_SATU-S C15427_FLORENTINA-1-SHD-60 C15800_MOLLY-S C15802_MOLLY-W F15176_ANGELETTE-LENS F15523_LINNEA-90 C16503_STRADELLA-16-T3 F15524_LINNEA-60 10758 10192 10193 10194 10195 10196 10197 10198 10208 10209 10398 10403 10412 10414