

PRODUCT DATASHEET CA12893_HEIDI-WR

HEIDI-WR

~30° wide round shaped beam

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 21.6 mm
Height	11.7 mm
Fastening	tape, pin
ROHS compliant	yes 🛈



MATERIAL SPECIFICATIONS:

Component HEIDI-WR HEIDI-TAPE

Туре	
Single lens	
Таре	


Material	Colour	Finish
PMMA	clear	
PU tape	black	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA12893_HEIDI-WR	Single lens	3264	204	204	11.1
» Box size: 480 x 280 x 300 mm					



PRODUCT DATASHEET CA12893_HEIDI-WR

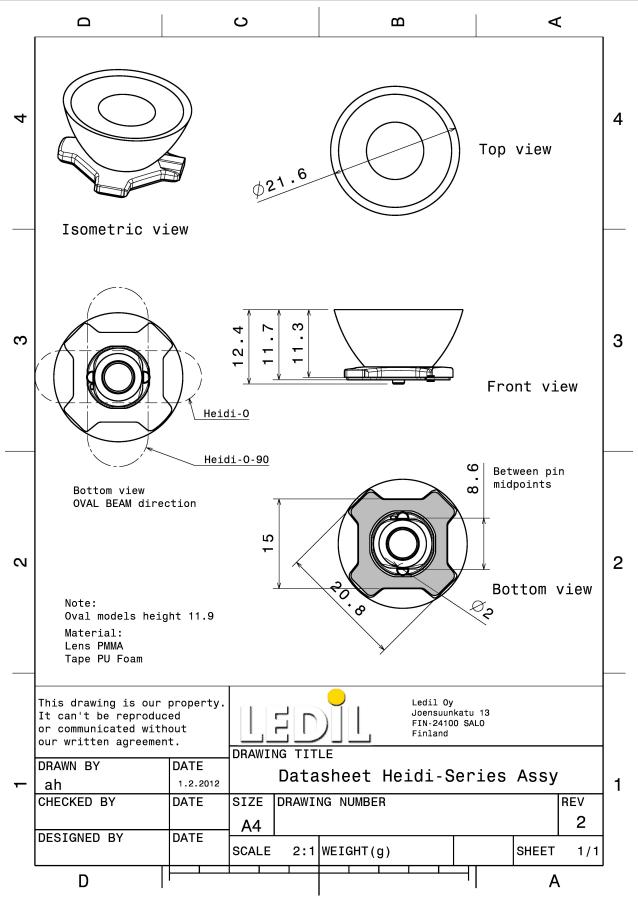

See also our general installation guide: <u>www.ledil.com/installation_guide</u>



PHOTOMETRIC DATA (MEASURED):

		
CREE \$		
LED	XP-G	
FWHM	31.0°	
Efficiency	%	
LEDs/each optic		
Light colour	White	
Required compor		
	6113.	
CREE \$		
	XQ-E HD	
FWHM	25.0°	25-
Efficiency	94 %	
Peak intensity	94 % 4.3 cd/lm	60 ⁴ - 2600 - 60 ⁴
LEDs/each optic		
LEDS/each optic	White	9° / / / / /
Required compor		$ \qquad \qquad$
Required compor	ents	
		30 ⁶
CREE \$		90 ⁴ 99 ⁴
LED	XQ-E HI	
FWHM	27.0°	73*
Efficiency	94 %	
Peak intensity	3.8 cd/lm	60 ⁴ 50 ⁴
LEDs/each optic		
Light colour	White	
Required compor		
	6115.	
		- 320
		30.
	EDS	25 ⁷ 0 ⁹ 25 ²
LED FWHM	LUXEON Z ES 24.0°	
	93 %	
Efficiency Peak intensity	93 % 4.9 cd/lm	
LEDs/each optic Light colour	White	
Required compor		
	uno.	
L		



PHOTOMETRIC DATA (MEASURED):

	NUS	90° 6 90°
LED	SST-10-B130	
FWHM	27.0°	23.
Efficiency	95 %	50 ⁴
Peak intensity	4 cd/lm	
LEDs/each optic	1	
Light colour	Blue	97 B*
Required compor	ents:	200 200 200
Ø NICHIΛ		
LED	NVSxx19B/NVSxx19C	
FWHM	26.0°	
Efficiency	87 %	
Peak intensity	4.1 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required compor	ents:	



PHOTOMETRIC DATA (SIMULATED):

CREE LED FWHM Efficiency Peak intensity LEDs/each optic Light colour Required componer	XP-G3 32.0° 94 % 3.1 cd/lm 1 White	99* 95* 95* 90* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 95* 2000 200
Ø NICHIΛ		
LED FWHM Efficiency Peak intensity LEDs/each optic Light colour Required componer	NVSxE21A 17.0° 94 % 8.6 cd/lm 1 White tts:	27 27 27 27 20 20 20 20 20 20 20 20 20 20
OCDAM		157 0° 157
OSRAM Opto Semiconductors LED FWHM Efficiency Peak intensity LEDs/each optic Light colour Required componer	OSCONIQ P 3030 24.0° 97 % 5.5 cd/lm 1 White its:	2000 201 201 201 201 201 201 201
OSRAM Opto Semiconductors LED FWHM Efficiency Peak intensity LEDs/each optic Light colour Required componer	OSLON Black 20.0° 95 % 6.6 cd/lm 1 White hts:	94 95 95 96 96 96 96 96 96 96 96 96 96




PHOTOMETRIC DATA (SIMULATED):

OSRAM Opto Semiconductors

LEDCFWHM2Efficiency9Peak intensity6LEDs/each optic1Light colourWRequired components:

OSLON Black Flat 22.0° 94 % 6.9 cd/lm 1 White





PRODUCT DATASHEET CA12893_HEIDI-WR

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc. 228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd. # 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/ where_to_buy

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Lenses Assemblies category:

Click to view products by Ledil manufacturer:

Other Similar products are found below :

FCN12592_LE1-D-COP_CA16129_OLGA-W_CA16370_HB-SQ-W_FN15972_RONDA-ZT45-C_CS15759_HB-2X2MX-8-W CA16435_LXP2-SS-WAS_CN16210_GABRIELLA-MIDI-W_CP17137_CARMEN-M2-C_CA16015_STRADA-SQ-SCL_CP17594_TINA-SC-RS_CS15767_HB-2X2MX-8-M_CP10960_RGBX-SS_CP12395_LXP3-W_CP12939_LARISA-RS-CLIP16_C14636_XTM-PF-ADAPTER CA11819_STRADA-SQ-T-DW_CA14508_G2-LXP2-D_CA14601_VERONICA-SQ-MINI-RS_FCP13895_SEANNA-A_CP12943_LARISA-O-CLIP16_FP11124_LISA2-O-PIN_CS14597_HB-IP-2X6-O_CP14995_FLORENTINA-HLD-O_CS15158_STRADA-IP-2X6-T4-B CS16323_STRADELLA-IP-28-HB-M_FN14976_STELLA-DWC2_FN15264_STELLA-HB-WWW_CA15584_ZORYA-MINI-TAPE FA15229_ROSE-MRK-S_FA15232_ROSE-MRK-M_FA15233_ROSE-MRK-W_FCN13552_CRYSTAL-RS_FN15552_RONDA-W FS15626_FLORENCE-3R-IP-Z90_FS15786_FLORENCE-3R-IP-Z60_FS15847_FLORENCE-3R-IP-O_CA14505_G2-LXP2-RS2-P FCN12775_IRIS-O_CP15304_LARISA-RS-PIN_FN15679_RONDA-S_CA15519_VERONICA-SQ-MINI-D_FP14414_LISA2-O-PIN LL01CR-DF60L06-M2_FN15993_RONDA-O_FN15977_RONDA-WAS2_CA14366_FLARE-MAXI-TAPE_CA14442_VERONICA-SQ-W CA14509_G2-LXP2-M-P_CA15231_VERONICA-SQ-MINI-W_FP11002_LISA2-W-PIN