

OLGA-RS

~9° spot beam beam. Optimized for high-power 3535 size LED packages. Assembly with holder and installation tape.

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 32.0 mm
Height	19.1 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ




MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
OLGA-RS	Single lens	PMMA	clear	
OLGA-HLD	Holder	PC	black	
SPUTNIK-TAPE3	Tape	Acrylic foam	black	


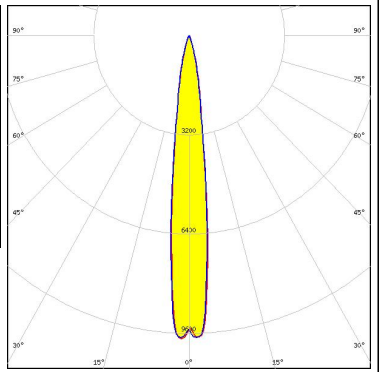
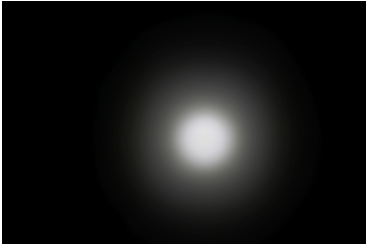
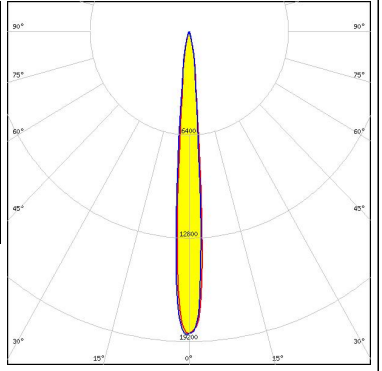

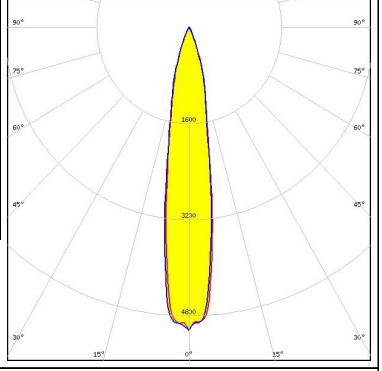
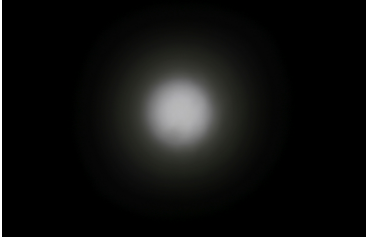
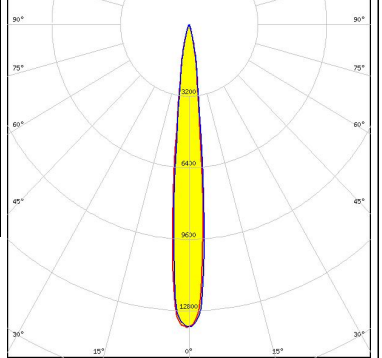
ORDERING INFORMATION:

Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CA16672_OLGA-RS	Single lens	792	132	66	9.8
» Box size: 476 x 273 x 292 mm					


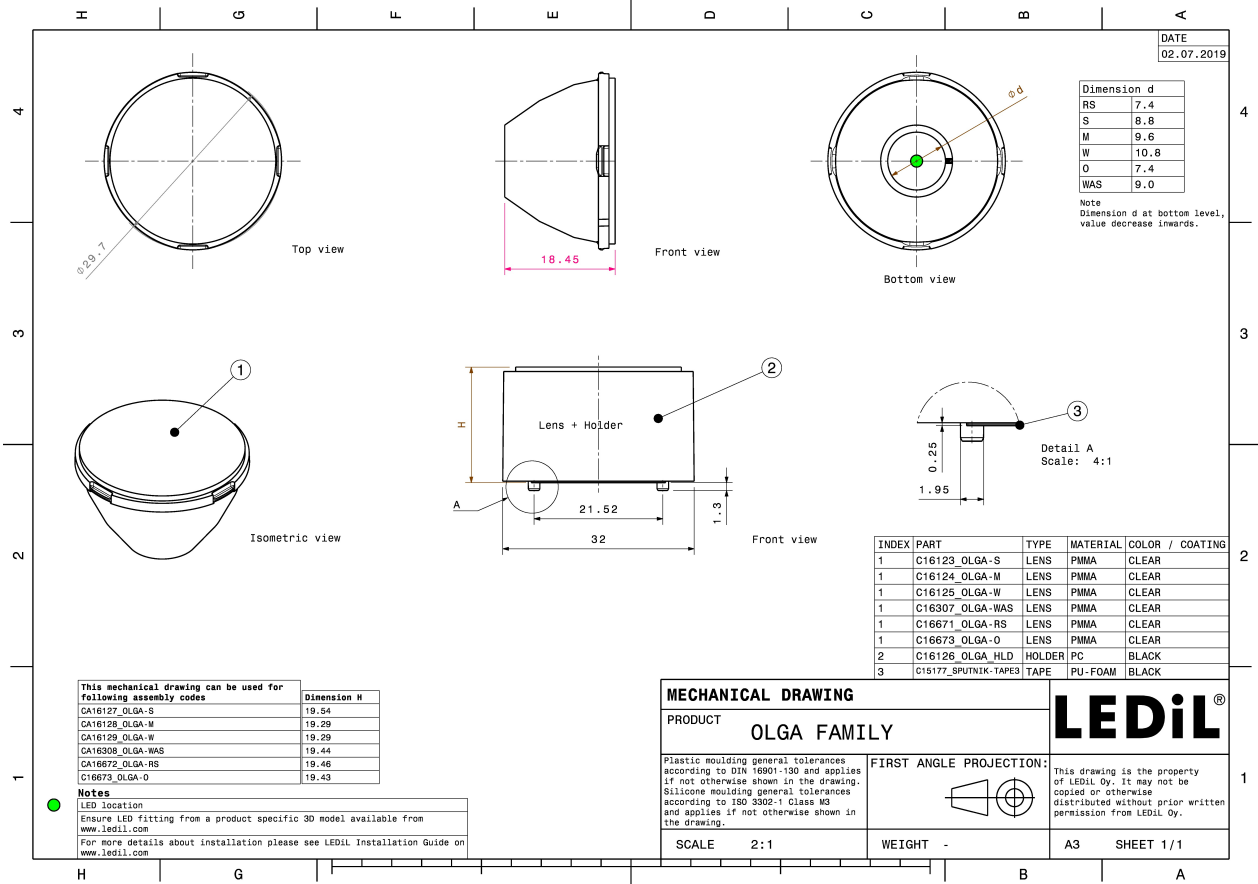

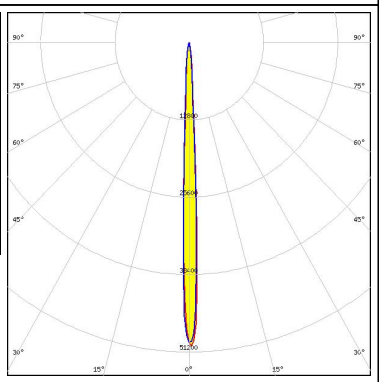

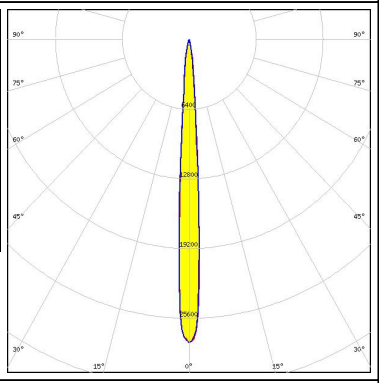

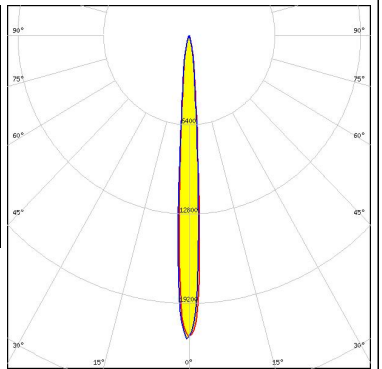


See also our general installation guide: www.ledil.com/installation_guide


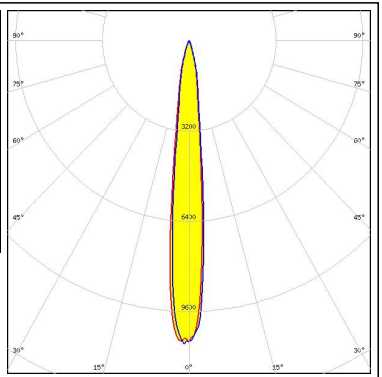

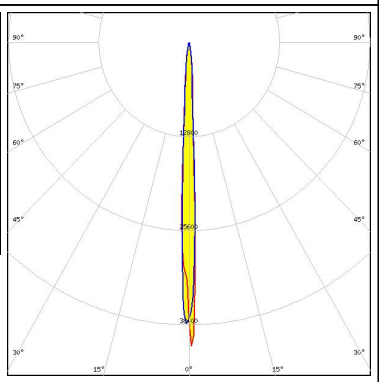

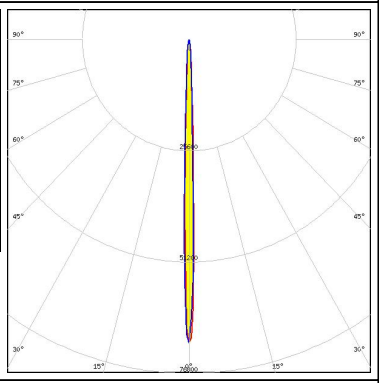

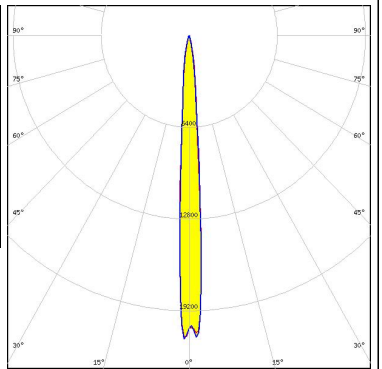
PHOTOMETRIC DATA (MEASURED):

<p>CREE ⇄ LED</p> <p>LED XHP35 HD FWHM / FWTM 13.0° / 29.0° Efficiency 84 % Peak intensity 9.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE ⇄ LED</p> <p>LED XHP35 HI FWHM / FWTM 9.0° / 22.0° Efficiency 87 % Peak intensity 18.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE ⇄ LED</p> <p>LED XHP50.2 FWHM / FWTM 17.0° / 41.0° Efficiency 78 % Peak intensity 5.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE ⇄ LED</p> <p>LED XM-L3 FWHM / FWTM 11.0° / 25.0° Efficiency 86 % Peak intensity 13.6 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

PHOTOMETRIC DATA (MEASURED):
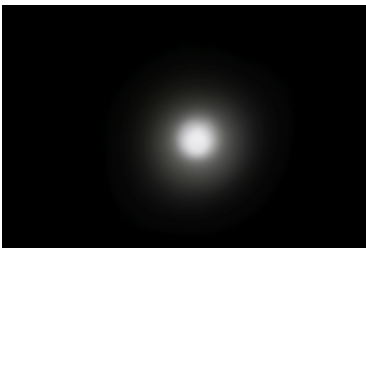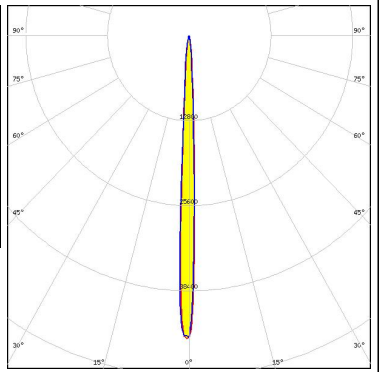
<p>CREE ⇄ LED</p> <p>LED XP-E FWHM / FWTM 5.0° / 12.0° Efficiency 87 % Peak intensity 45.6 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE ⇄ LED</p> <p>LED XP-E2 FWHM / FWTM 4.9° / 11.6° Efficiency 86 % Peak intensity 50.2 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE ⇄ LED</p> <p>LED XP-G2 FWHM / FWTM 7.0° / 17.0° Efficiency 86 % Peak intensity 28 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE ⇄ LED</p> <p>LED XP-G3 FWHM / FWTM 8.0° / 20.0° Efficiency 85 % Peak intensity 21.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		


PHOTOMETRIC DATA (MEASURED):

<p>CREE → LED</p> <p>LED XP-L2 FWHM / FWTM 12.0° / 29.0° Efficiency 83 % Peak intensity 10.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE → LED</p> <p>LED XQ-E HD FWHM / FWTM 5.0° / 13.0° Efficiency 79 % Peak intensity 42 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE → LED</p> <p>LED XQ-E HI FWHM / FWTM 3.0° / 9.0° Efficiency 84 % Peak intensity 70 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE → LED</p> <p>LED XT-E FWHM / FWTM 8.0° / 19.0° Efficiency 83 % Peak intensity 21.2 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON 5050 Round LES
 FWHM / FWTM 14.0° / 38.0°
 Efficiency 86 %
 Peak intensity 7.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

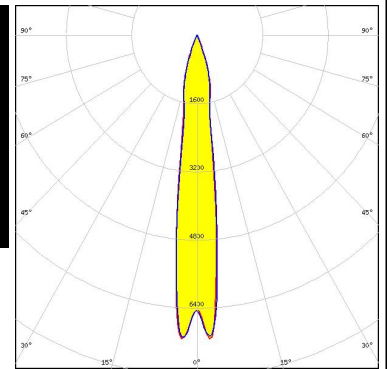



LUMILEDS

LED LUXEON MZ
 FWHM / FWTM 11.0° / 30.0°
 Efficiency 85 %
 Peak intensity 11.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

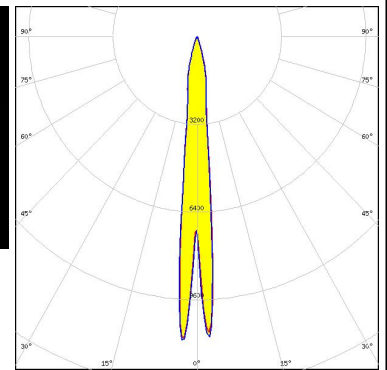



LUMILEDS

LED LUXEON TX
 FWHM / FWTM 7.0° / 18.0°
 Efficiency 86 %
 Peak intensity 24.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

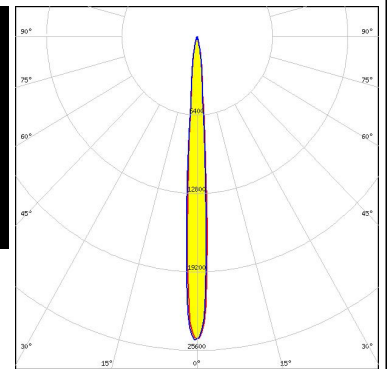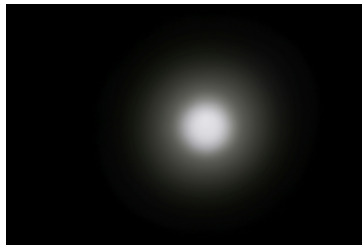

LUMILEDS



LED LUXEON V
 FWHM / FWTM 11.0° / 28.0°
 Efficiency 84 %
 Peak intensity 11.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

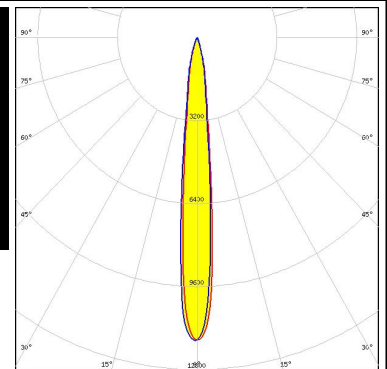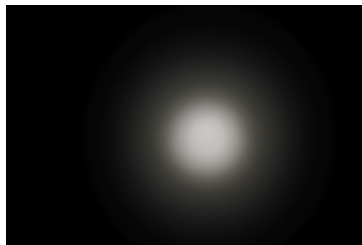

PHOTOMETRIC DATA (MEASURED):



LUMILEDS

LED LUXEON Z ES
 FWHM / FWTM 5.0° / 12.0°
 Efficiency 87 %
 Peak intensity 44.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

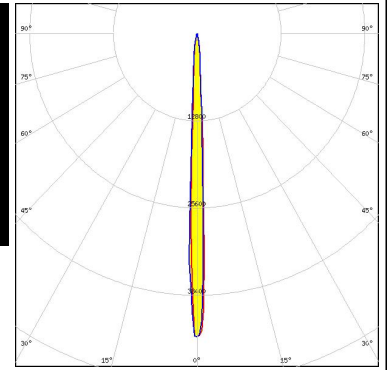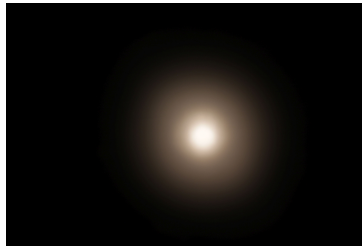



NICHIA

LED NCSx17A
 FWHM / FWTM 4.0° / 13.0°
 Efficiency 83 %
 Peak intensity 37.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

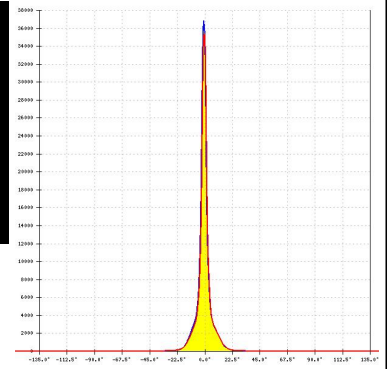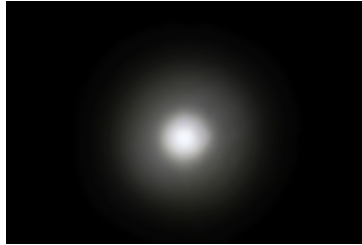



NICHIA

LED NV4x144A
 FWHM / FWTM 18.0° / 39.0°
 Efficiency 83 %
 Peak intensity 5.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:



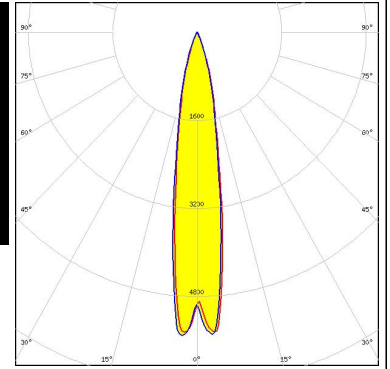
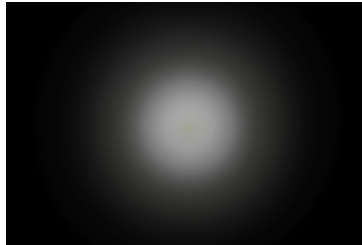

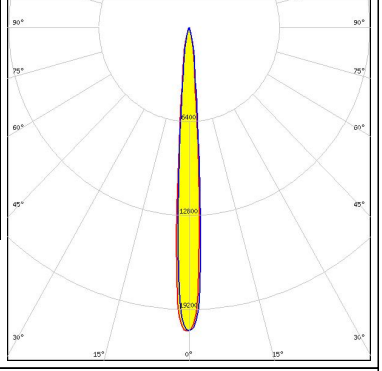

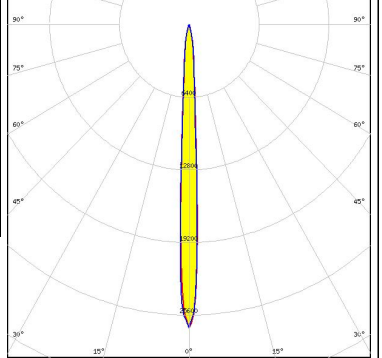


NICHIA

LED NVSW219D
 FWHM / FWTM 9.0° / 19.0°
 Efficiency 87 %
 Peak intensity 21 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

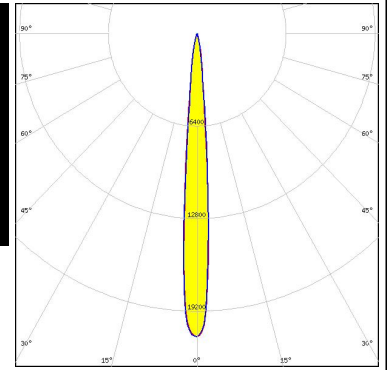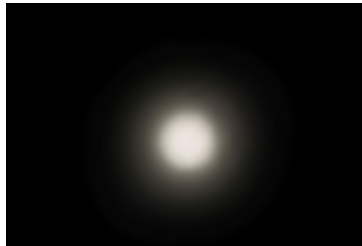

PHOTOMETRIC DATA (MEASURED):

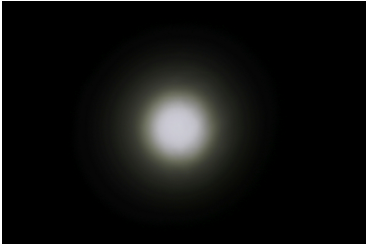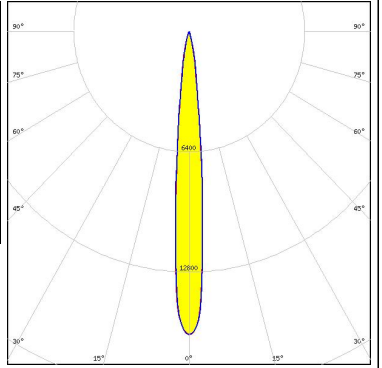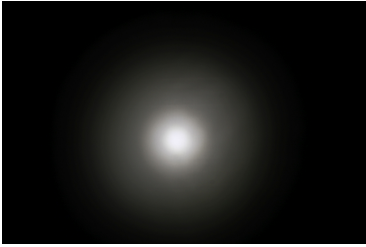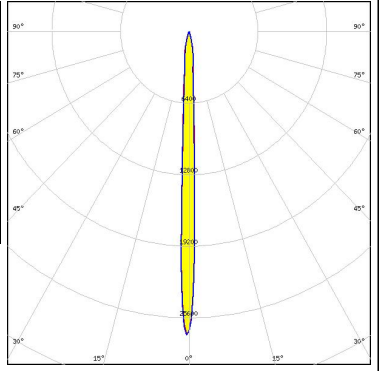
<p>NICHIA</p> <p>LED NVSW319B</p> <p>FWHM / FWTM 10.0° / 23.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 16.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>NICHIA</p> <p>LED NVSxE21A</p> <p>FWHM / FWTM 5.0° / 16.0°</p> <p>Efficiency 84 %</p> <p>Peak intensity 27.4 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>NICHIA</p> <p>LED NVSxx19B/NVSxx19C</p> <p>FWHM / FWTM 8.0° / 20.0°</p> <p>Efficiency 85 %</p> <p>Peak intensity 20.7 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ P 3737 (2W version)</p> <p>FWHM / FWTM 6.0° / 17.0°</p> <p>Efficiency 86 %</p> <p>Peak intensity 26.7 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		

PHOTOMETRIC DATA (MEASURED):

OSRAM

Opto Semiconductors



LED OSCONIQ P 3737 (3W version)
 FWHM / FWTM 10.0° / 25.0°
 Efficiency 85 %
 Peak intensity 14.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

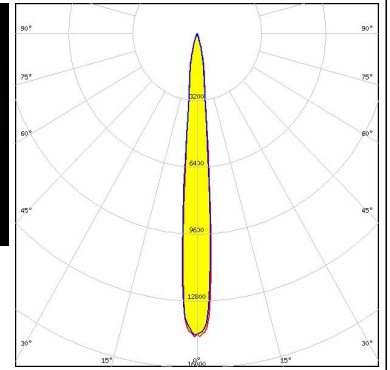

OSRAM

Opto Semiconductors



LED OSLON Square CSSRM2/CSSRM3
 FWHM / FWTM 7.0° / 17.0°
 Efficiency 86 %
 Peak intensity 26.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

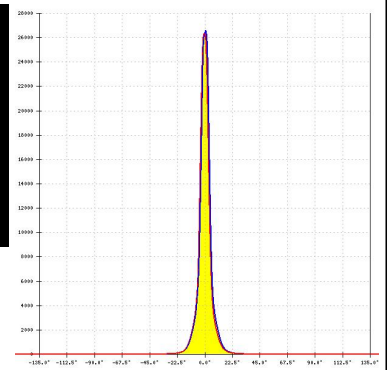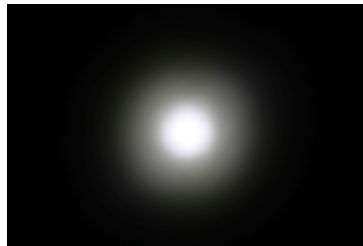

OSRAM


Opto Semiconductors

LED OSLON SSL 150
 FWHM / FWTM 4.0° / 11.0°
 Efficiency 87 %
 Peak intensity 57 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

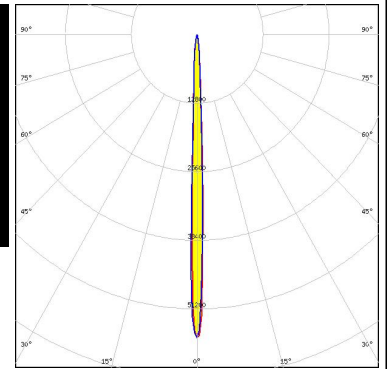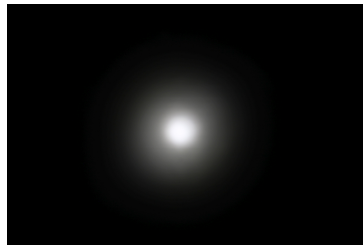

SAMSUNG



LED LH231B
 FWHM / FWTM 7.0° / 24.0°
 Efficiency 86 %
 Peak intensity 18 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

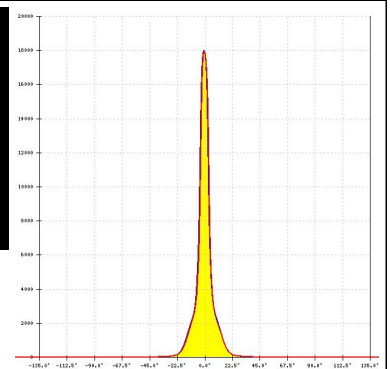

PHOTOMETRIC DATA (MEASURED):


SAMSUNG

LED LH351B
 FWHM / FWTM 8.0° / 19.0°
 Efficiency 86 %
 Peak intensity 21.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

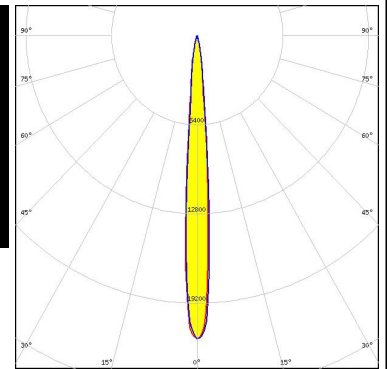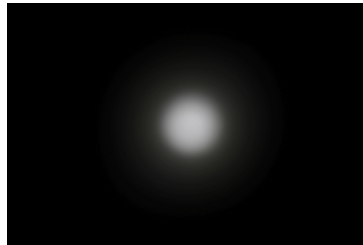



SAMSUNG

LED LH351C
 FWHM / FWTM 9.0° / 21.0°
 Efficiency 87 %
 Peak intensity 19.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

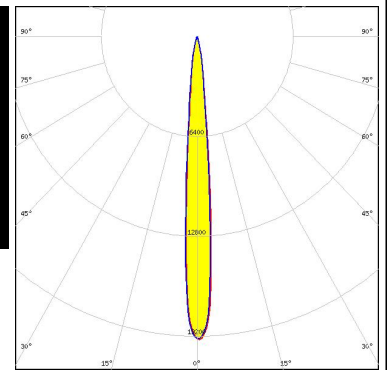


SAMSUNG

LED LH351D
 FWHM / FWTM 12.0° / 26.0°
 Efficiency 86 %
 Peak intensity 12.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

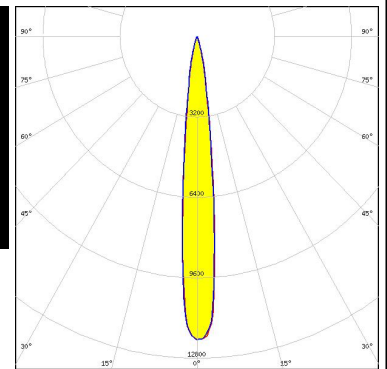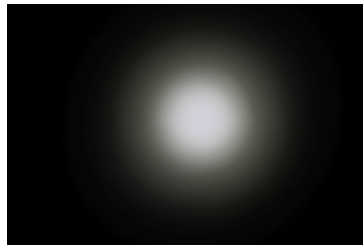


SAMSUNG


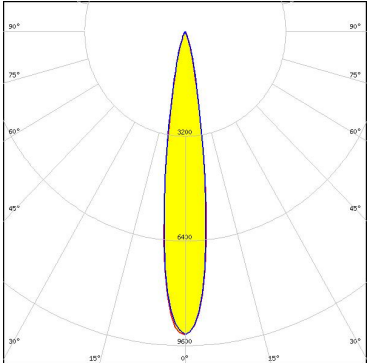

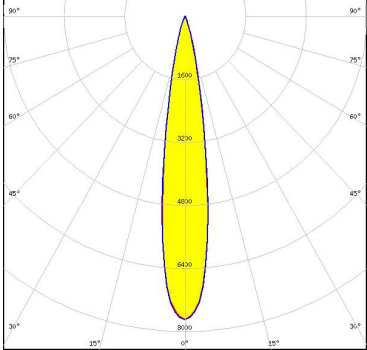

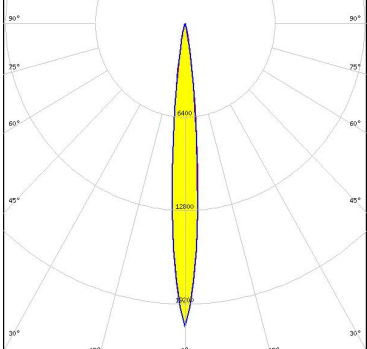

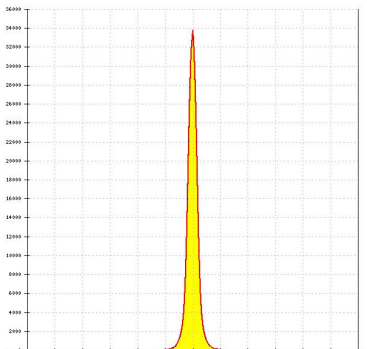
LED LH508A
 FWHM / FWTM 14.0° / 38.0°
 Efficiency 86 %
 Peak intensity 7.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

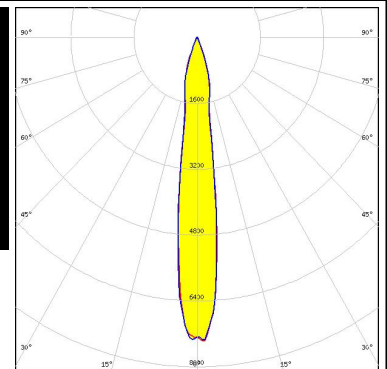

PHOTOMETRIC DATA (MEASURED):

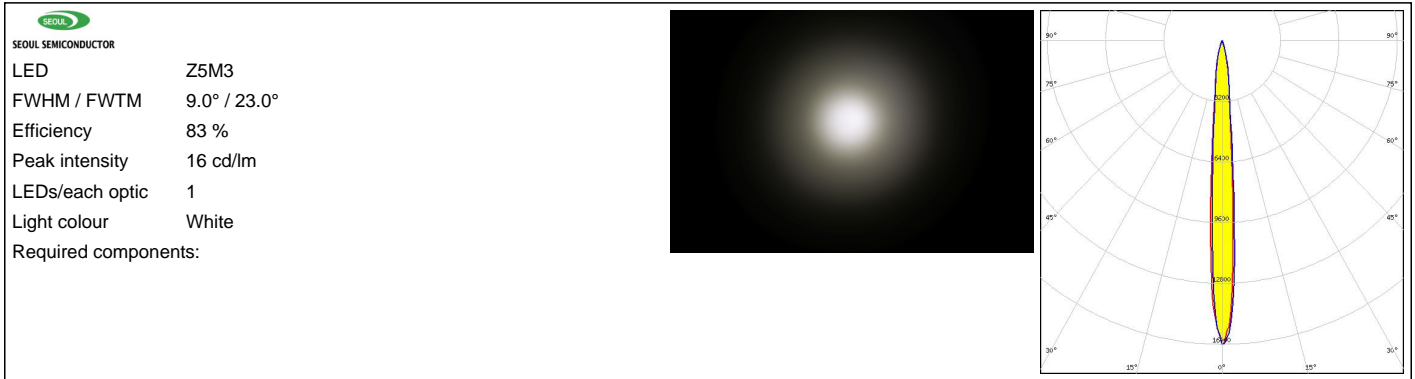


PHOTOMETRIC DATA (SIMULATED):

<p></p> <p>LED: V4 HD FWHM / FWTM: 16.0° / 31.0° Efficiency: 96 % Peak intensity: 9.3 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p></p> <p>LED: XHP50.3 HD FWHM / FWTM: 16.0 + 18.0° / 32.0° Efficiency: 89 % Peak intensity: 7.7 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p></p> <p>LED: XP-G2 HE FWHM / FWTM: 10.0° / 20.0° Efficiency: 93 % Peak intensity: 20.8 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p></p> <p>LED: XP-L HI FWHM / FWTM: 8.0° / 15.0° Efficiency: 92 % Peak intensity: 33 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	


PHOTOMETRIC DATA (SIMULATED):




LED XP-P
 FWHM / FWTM 6.0° / 12.0°
 Efficiency 96 %
 Peak intensity 63.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

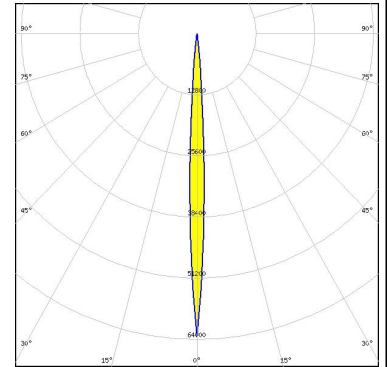


LED LUXEON 7070
 FWHM / FWTM 19.0 + 20.0° / 49.0 + 50.0°
 Efficiency 95 %
 Peak intensity 4.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

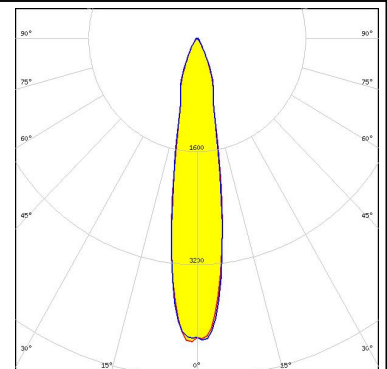





LED SST-40
 FWHM / FWTM 12.0° / 24.0°
 Efficiency 93 %
 Peak intensity 14.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

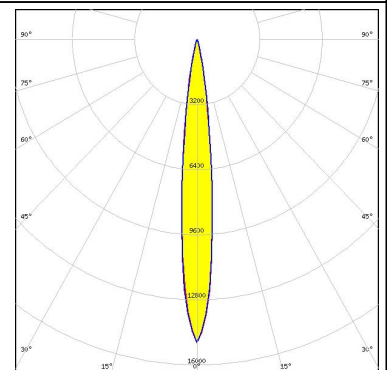




LED COB S-Type (LES 7)
 FWHM / FWTM 16.0° / 52.0°
 Efficiency 84 %
 Peak intensity 3.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

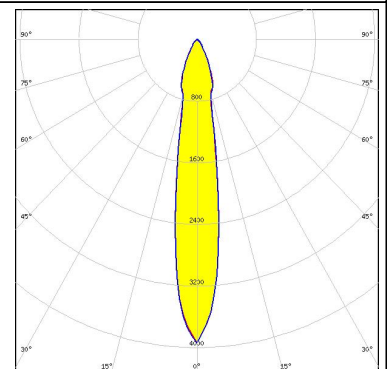

PHOTOMETRIC DATA (SIMULATED):
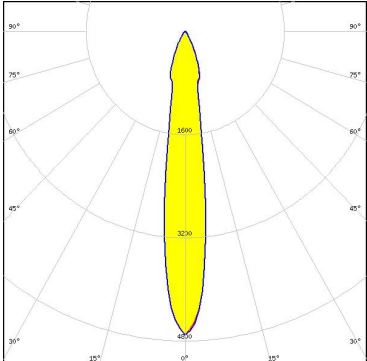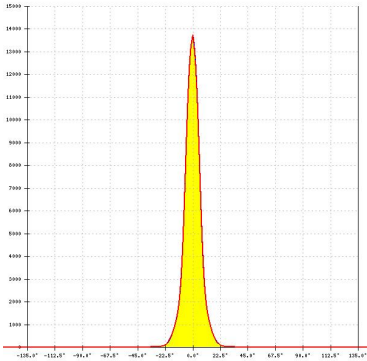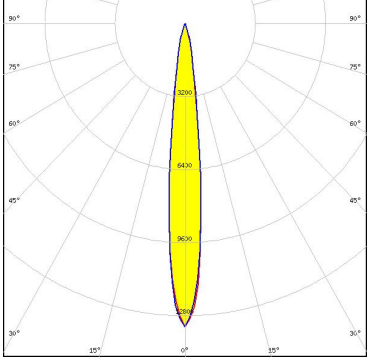
<p>NICHIA</p> <p>LED COB T-Type FWHM / FWTM 16.0° / 48.0° Efficiency 86 % Peak intensity 4.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>NICHIA</p> <p>LED NV4WB35AM FWHM / FWTM 12.0° / 26.0° Efficiency 94 % Peak intensity 13.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>NICHIA</p> <p>LED NV4WB35AM FWHM / FWTM 12.0° / 26.0° Efficiency 93 % Peak intensity 13.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED OSOLON PURE 1010 (GW VJLPE1) FWHM / FWTM 14.0° / 36.0° Efficiency 88 % Peak intensity 8.1 cd/lm LEDs/each optic 9 Light colour White Required components:</p>	

PHOTOMETRIC DATA (SIMULATED):
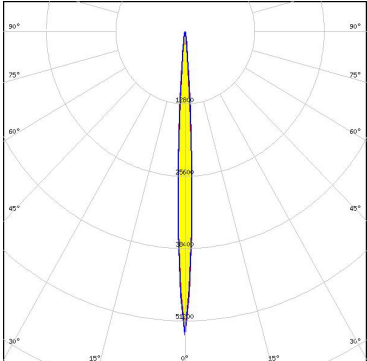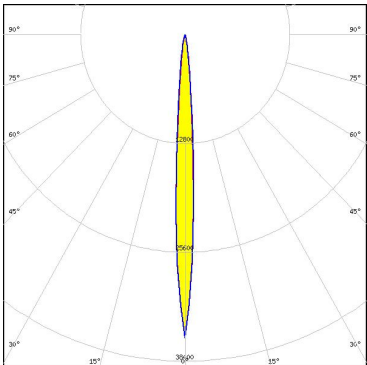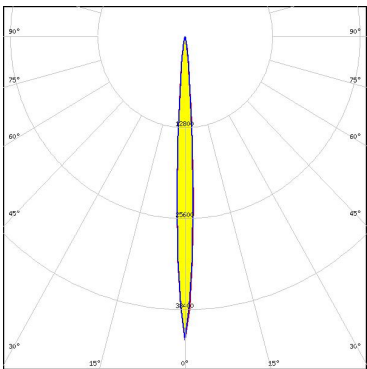
<p>OSRAM Opto Semiconductors</p> <p>LED SFH 4170S FWHM / FWTM 6.0° / 12.0° Efficiency 82 % LEDs/each optic 1 Light colour IR Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED SFH 4715AS FWHM / FWTM 7.0° / 16.0° Efficiency 92 % LEDs/each optic 1 Light colour IR Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED SFH 4716AS FWHM / FWTM 6.0° / 14.0° Efficiency 93 % LEDs/each optic 1 Light colour IR Required components:</p>	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Lenses Assemblies](#) category:

Click to view products by [Ledil](#) manufacturer:

Other Similar products are found below :

[FCN12592_LE1-D-COP](#) [CA16129_OLGA-W](#) [CA16370_HB-SQ-W](#) [FN15972_RONDA-ZT45-C](#) [CS15759_HB-2X2MX-8-W](#)
[CA16435_LXP2-SS-WAS](#) [CN16210_GABRIELLA-MIDI-W](#) [CP17137_CARMEN-M2-C](#) [CA16015_STRADA-SQ-SCL](#) [CP17594_TINA-SC-](#)
[RS](#) [CS15767_HB-2X2MX-8-M](#) [CP10960_RGBX-SS](#) [CP12395_LXP3-W](#) [CP12939_LARISA-RS-CLIP16](#) [C14636_XTM-PF-ADAPTER](#)
[CA11819_STRADA-SQ-T-DW](#) [CA14508_G2-LXP2-D](#) [CA14601_VERONICA-SQ-MINI-RS](#) [FCP13895_SEANNA-A](#) [CP12943_LARISA-](#)
[O-CLIP16](#) [FP11124_LISA2-O-PIN](#) [CS14597_HB-IP-2X6-O](#) [CP14995_FLORENTINA-HLD-O](#) [CS15158_STRADA-IP-2X6-T4-B](#)
[CS16323_STRADELLA-IP-28-HB-M](#) [FN14976_STELLA-DWC2](#) [FN15264_STELLA-HB-WWW](#) [CA15584_ZORYA-MINI-TAPE](#)
[FA15229_ROSE-MRK-S](#) [FA15232_ROSE-MRK-M](#) [FA15233_ROSE-MRK-W](#) [FCN13552_CRYSTAL-RS](#) [FN15552_RONDA-W](#)
[FS15626_FLORENCE-3R-IP-Z90](#) [FS15786_FLORENCE-3R-IP-Z60](#) [FS15847_FLORENCE-3R-IP-O](#) [CA14505_G2-LXP2-RS2-P](#)
[FCN12775_IRIS-O](#) [CP15304_LARISA-RS-PIN](#) [FN15679_RONDA-S](#) [CA15519_VERONICA-SQ-MINI-D](#) [FP14414_LISA2-O-PIN](#)
[LL01CR-DF60L06-M2](#) [FN15993_RONDA-O](#) [FN15977_RONDA-WAS2](#) [CA14366_FLARE-MAXI-TAPE](#) [CA14442_VERONICA-SQ-W](#)
[CA14509_G2-LXP2-M-P](#) [CA15231_VERONICA-SQ-MINI-W](#) [FP11002_LISA2-W-PIN](#)