

PRODUCT DATASHEET CN11770_IRIS

IRIS

 ${\sim}10^\circ$ spot beam with holder optimized for Luminus SST-50

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 38.0 mm
Height	28.1 mm
Fastening	glue, pin
ROHS compliant	yes 🛈

MATERIAL SPECIFICATIONS:

Component IRIS IRIS-SST-HLD

Туре	
Single lens	
Holder	




Material	Colour	Finish
PMMA	clear	
PC	black	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CN11770_IRIS	Single lens	348	116	116	0.0
» Box size:					



PRODUCT DATASHEET CN11770_IRIS

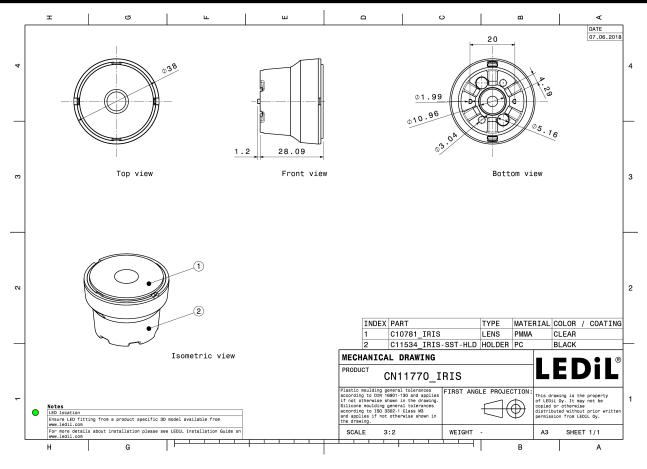

See also our general installation guide: www.ledil.com/installation_guide





PHOTOMETRIC DATA (MEASURED):

		302
LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	MHD-E/G 18.0° / 36.0° 93 % 5.7 cd/lm 1 White	
CREE (LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	XHP35 HD 12.0° / 28.0° 85 % 10 cd/lm 1 White	
CREE (LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	XHP35 HI 11.0° / 24.0° 87 % 14 cd/lm 1 White	
CREE LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	XHP50 13.0° / 30.0° 83 % 9.1 cd/lm 1 White	



PHOTOMETRIC DATA (MEASURED):

		50 ⁴
LED	XHP70	
FWHM / FWTM	14.0° / 39.0°	27
Efficiency	90 %	60 ⁴
Peak intensity	5.7 cd/lm	
LEDs/each optic	1	
Light colour	White	ø
Required compone	nts:	
		26 ⁶ 25 ⁹ 0 ⁴ 35 ⁴
	NUS	50° A 50°
LED	SST-90	
FWHM / FWTM	17.0° / 31.0°	2 <u>200</u>
Efficiency	0 %	
Peak intensity	6.3 cd/lm	
LEDs/each optic	1	
Light colour	White	g* <u>600</u> Ø*
Required compone	nts:	
		600
		20-
LED	NV9W149AM	
LED FWHM / FWTM	19.0° / 40.0°	72
Efficiency	80 %	
Peak intensity	4.7 cd/lm	
LEDs/each optic	1	
Light colour	White	gr ar
Required compone		
OSRAM		355 ¹ 0 ¹ 155
Opto Semiconductors	Duria 040	
LED FWHM / FWTM	Duris S10	
FWHM / FWTM Efficiency	15.0° / 35.0° 83 %	
Peak intensity	83 % 7.1 cd/lm	
LEDs/each optic	7. i co/im 1	
Light colour	White	
Required compone		



PHOTOMETRIC DATA (SIMULATED):

	US	90 ⁴
LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components:	SBT-90 12.0° / 20.0° 93 % 20.6 cd/lm 1 Red	20, 0, 12, 20, 0, 12, 0, 0, 0, 10, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0
LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components:	SST-90 16.0° / 28.0° 91 % 10 cd/lm 1 Red	20* D* D* D*
NICHIA LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components:	NV4x144A 14.0° / 26.0° 91 % 11.6 cd/lm 1 White	



PRODUCT DATASHEET CN11770_IRIS

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc. 228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd. # 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/ where_to_buy

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Lenses Assemblies category:

Click to view products by Ledil manufacturer:

Other Similar products are found below :

FCN12592_LE1-D-COP_CA16129_OLGA-W_CA16370_HB-SQ-W_FN15972_RONDA-ZT45-C_CS15759_HB-2X2MX-8-W CA16435_LXP2-SS-WAS_CN16210_GABRIELLA-MIDI-W_CP17137_CARMEN-M2-C_CA16015_STRADA-SQ-SCL_CP17594_TINA-SC-RS_CS15767_HB-2X2MX-8-M_CP10960_RGBX-SS_CP12395_LXP3-W_CP12939_LARISA-RS-CLIP16_C14636_XTM-PF-ADAPTER CA11819_STRADA-SQ-T-DW_CA14508_G2-LXP2-D_CA14601_VERONICA-SQ-MINI-RS_FCP13895_SEANNA-A_CP12943_LARISA-O-CLIP16_FP11124_LISA2-O-PIN_CS14597_HB-IP-2X6-O_CP14995_FLORENTINA-HLD-O_CS15158_STRADA-IP-2X6-T4-B CS16323_STRADELLA-IP-28-HB-M_FN14976_STELLA-DWC2_FN15264_STELLA-HB-WWW_CA15584_ZORYA-MINI-TAPE FA15229_ROSE-MRK-S_FA15232_ROSE-MRK-M_FA15233_ROSE-MRK-W_FCN13552_CRYSTAL-RS_FN15552_RONDA-W FS15626_FLORENCE-3R-IP-Z90_FS15786_FLORENCE-3R-IP-Z60_FS15847_FLORENCE-3R-IP-O_CA14505_G2-LXP2-RS2-P FCN12775_IRIS-O_CP15304_LARISA-RS-PIN_FN15679_RONDA-S_CA15519_VERONICA-SQ-MINI-D_FP14414_LISA2-O-PIN LL01CR-DF60L06-M2_FN15993_RONDA-O_FN15977_RONDA-WAS2_CA14366_FLARE-MAXI-TAPE_CA14442_VERONICA-SQ-W CA14509_G2-LXP2-M-P_CA15231_VERONICA-SQ-MINI-W_FP11002_LISA2-W-PIN