

PRODUCT DATASHEET CP12412_LOS-RS

LOS-RS

~9.6° spot beam optimized for Osram Oslon Square EC. 14.3 mm high assembly.

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 21.6 mm
Height	14.3 mm
Fastening	glue, pin
ROHS compliant	yes 🛈



MATERIAL SPECIFICATIONS:

Component		
LXP2-RS		
LEILA-HLD-OSL		

Туре	
Single lens	
Holder	


Material	Colour	Finish
PMMA	clear	
PC	white	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CP12412_LOS-RS	Single lens	1680	336	112	9.1
» Box size: 480 x 280 x 300 mm					



PRODUCT DATASHEET CP12412_LOS-RS

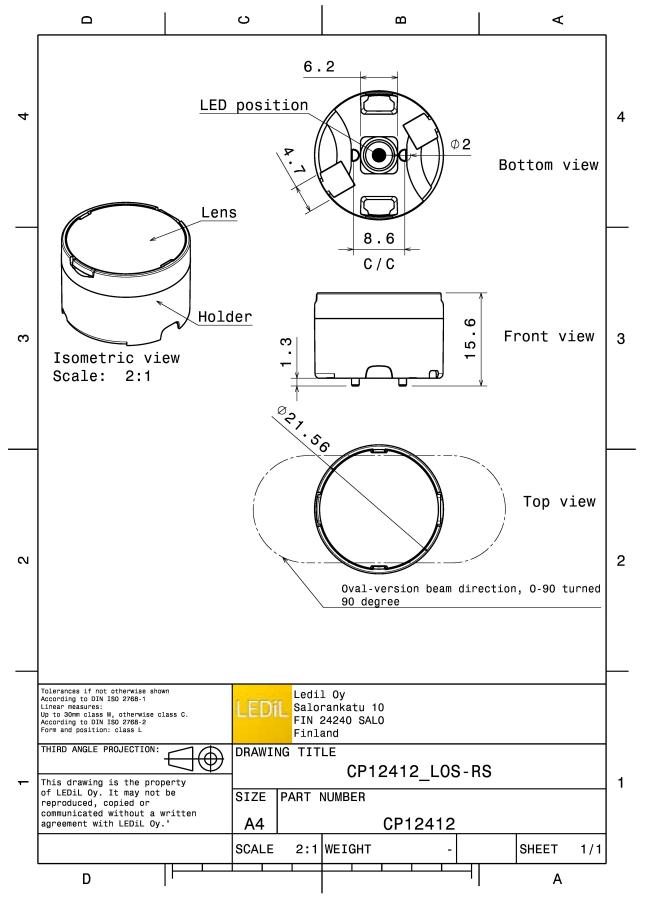

See also our general installation guide: www.ledil.com/installation_guide



PHOTOMETRIC DATA (MEASURED):

OSERAM Opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	OSLON Square EC 10.0° / 20.0° 94 % 20.9 cd/lm 1 White ents:	30 12 6 12 7 10 1 30 12 10 10 10 10 10 10 10 10 10 10 10 10 10
OSRAM Opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	OSLON SSL 150 6.0° / 15.0° 93 % 40 cd/lm 1 White ents:	3)* 12 5)* 6* 13* 6* 5* 5* 5* 5* 5* 5* 5* 5* 5* 5
OSRAM Opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	OSLON SSL 80 7.0° / 14.0° 93 % 29.8 cd/lm 1 White ents:	



PHOTOMETRIC DATA (SIMULATED):

		99 ⁺
LED	XT-E	75*
FWHM / FWTM	9.9° / 22.0°	
Efficiency	94 %	600 600
Peak intensity	19.5 cd/lm	
LEDs/each optic		
Light colour	White	12800
Required components:		
		\times $($ $)$ \times
		1 the state of the
		30° 30° 30°
)S	90° 4 90°
LED	LUXEON C	
FWHM / FWTM	8.0° / 20.0°	25
Efficiency	94 %	600
Peak intensity	22.9 cd/lm	
LEDs/each optic	1	
Light colour	White	\$7°
Required components:		
		30° 30°
		15° 0° 35°
OSRAM Opto Semiconductors		50° A 36°
OSRAM Opto Semiconductors LED	OSLON Square CSSRM2/CSSRM3	90°
Opto Semiconductors	OSLON Square CSSRM2/CSSRM3 9.8° / 20.0°	99° 99° 79° 99°
Opto Semiconductors		99 ⁴ 95 25 600 600
Opto Semiconductors LED FWHM / FWTM	9.8° / 20.0°	90 ¹ 90 ² 90 ²
Opto Semiconductors LED FWHM / FWTM Efficiency	9.8° / 20.0° 94 %	94 95 97 97 97 97 97 97 97 97 97 97 97 97 97
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour	9.8° / 20.0° 94 % 21.9 cd/lm	97
opto semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic	9.8° / 20.0° 94 % 21.9 cd/lm 1	99 ¹ 99 ¹ 99 ² 99 ² 99 ³ 99 ¹ 99 ¹ 9
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour	9.8° / 20.0° 94 % 21.9 cd/lm 1	51 ³ 22 ³ 660 660 67 67 67 67 67 67 67
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour	9.8° / 20.0° 94 % 21.9 cd/lm 1	91 ⁴ 92 93 95 95 90 900 900 900 900 900 900 900 90
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour	9.8° / 20.0° 94 % 21.9 cd/lm 1	97 97 97 97 97 97 97 97 97 97 97 97 97 9
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components:	9.8° / 20.0° 94 % 21.9 cd/lm 1 White	34 35 34 12 35 12 62 12000 63 64 12000 64 12000 64 12000 64 12000 64 12000 12 12000 12
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDS/each optic Light colour Required components:	9.8° / 20.0° 94 % 21.9 cd/lm 1 White	30, 30, 30, 12,0 40, 120,0 60, 60,0 33, 25, 33, 25, 33, 25, 33, 25,
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components:	9.8° / 20.0° 94 % 21.9 cd/lm 1 White	25- 25- 25- 25- 25- 25- 25- 25- 25- 25-
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components: SANNSUN LED FWHM / FWTM	9.8° / 20.0° 94 % 21.9 cd/lm 1 White	50 50 50 50 50 50 50 50 50 50
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components: SAMSUN LED FWHM / FWTM Efficiency	9.8° / 20.0° 94 % 21.9 cd/lm 1 White LH351B 12.0° / 25.0° 94 %	25°
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components: SANNSUN LED FWHM / FWTM Efficiency Peak intensity	9.8° / 20.0° 94 % 21.9 cd/lm 1 White LH351B 12.0° / 25.0° 94 % 15 cd/lm	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components: SAMSUN LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic	9.8° / 20.0° 94 % 21.9 cd/lm 1 White LH351B 12.0° / 25.0° 94 % 15 cd/lm 1	77
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components: SAMSUN LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour	9.8° / 20.0° 94 % 21.9 cd/lm 1 White LH351B 12.0° / 25.0° 94 % 15 cd/lm	27
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components: SAMSUN LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic	9.8° / 20.0° 94 % 21.9 cd/lm 1 White LH351B 12.0° / 25.0° 94 % 15 cd/lm 1	77
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components: SAMSUN LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour	9.8° / 20.0° 94 % 21.9 cd/lm 1 White LH351B 12.0° / 25.0° 94 % 15 cd/lm 1	77
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components: SAMSUN LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour	9.8° / 20.0° 94 % 21.9 cd/lm 1 White LH351B 12.0° / 25.0° 94 % 15 cd/lm 1	77



PHOTOMETRIC DATA (SIMULATED):

SEOUL SEOUL SEMICONDUCTOR		50* 50*
LED	Z5M1/Z5M2	
FWHM / FWTM	11.0° / 21.0°	
Efficiency	94 %	60°
Peak intensity	20.4 cd/lm	
LEDs/each optic	1	
Light colour	White	97* 12000 R*
Required components:		30 ⁴ 15 ⁵ 0 ⁴ 15 ⁵



PRODUCT DATASHEET CP12412_LOS-RS

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc. 228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd. # 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/ where_to_buy

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Lenses Assemblies category:

Click to view products by Ledil manufacturer:

Other Similar products are found below :

FCN12592_LE1-D-COP_CA16129_OLGA-W_CA16370_HB-SQ-W_FN15972_RONDA-ZT45-C_CS15759_HB-2X2MX-8-W CA16435_LXP2-SS-WAS_CN16210_GABRIELLA-MIDI-W_CP17137_CARMEN-M2-C_CA16015_STRADA-SQ-SCL_CP17594_TINA-SC-RS_CS15767_HB-2X2MX-8-M_CP10960_RGBX-SS_CP12395_LXP3-W_CP12939_LARISA-RS-CLIP16_C14636_XTM-PF-ADAPTER CA11819_STRADA-SQ-T-DW_CA14508_G2-LXP2-D_CA14601_VERONICA-SQ-MINI-RS_FCP13895_SEANNA-A_CP12943_LARISA-O-CLIP16_FP11124_LISA2-O-PIN_CS14597_HB-IP-2X6-O_CP14995_FLORENTINA-HLD-O_CS15158_STRADA-IP-2X6-T4-B CS16323_STRADELLA-IP-28-HB-M_FN14976_STELLA-DWC2_FN15264_STELLA-HB-WWW_CA15584_ZORYA-MINI-TAPE FA15229_ROSE-MRK-S_FA15232_ROSE-MRK-M_FA15233_ROSE-MRK-W_FCN13552_CRYSTAL-RS_FN15552_RONDA-W FS15626_FLORENCE-3R-IP-Z90_FS15786_FLORENCE-3R-IP-Z60_FS15847_FLORENCE-3R-IP-O_CA14505_G2-LXP2-RS2-P FCN12775_IRIS-O_CP15304_LARISA-RS-PIN_FN15679_RONDA-S_CA15519_VERONICA-SQ-MINI-D_FP14414_LISA2-O-PIN LL01CR-DF60L06-M2_FN15993_RONDA-O_FN15977_RONDA-WAS2_CA14366_FLARE-MAXI-TAPE_CA14442_VERONICA-SQ-W CA14509_G2-LXP2-M-P_CA15231_VERONICA-SQ-MINI-W_FP11002_LISA2-W-PIN