

## STRADA-IP-2X6-VSM

IESNA Type V (square) beam for wide area lighting such as car parks

### TECHNICAL SPECIFICATIONS:

Dimensions	173.0 x 71.4 mm
Height	8 mm
Fastening	screw
Ingress protection classes	IP67
ROHS compliant	yes ⓘ


### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
STRADA-IP-2X6-VSM	Multi-lens	PMMA	clear	
2X6-SEAL25	Seal	Silicone	white	

### ORDERING INFORMATION:


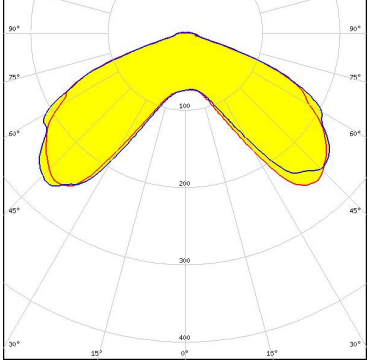

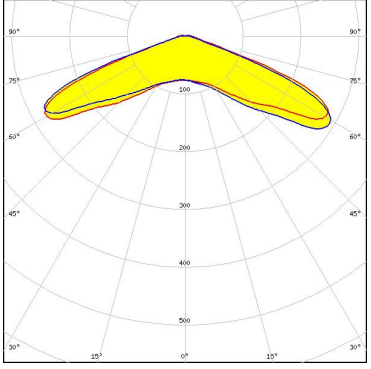

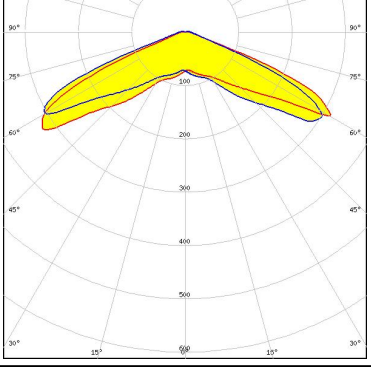

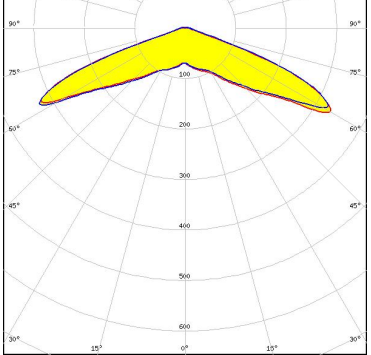
Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CS15020_STRADA-IP-2X6-VSM » Box size: 476 x 273 x 247 mm	Multi-lens	120	40	40	6.6



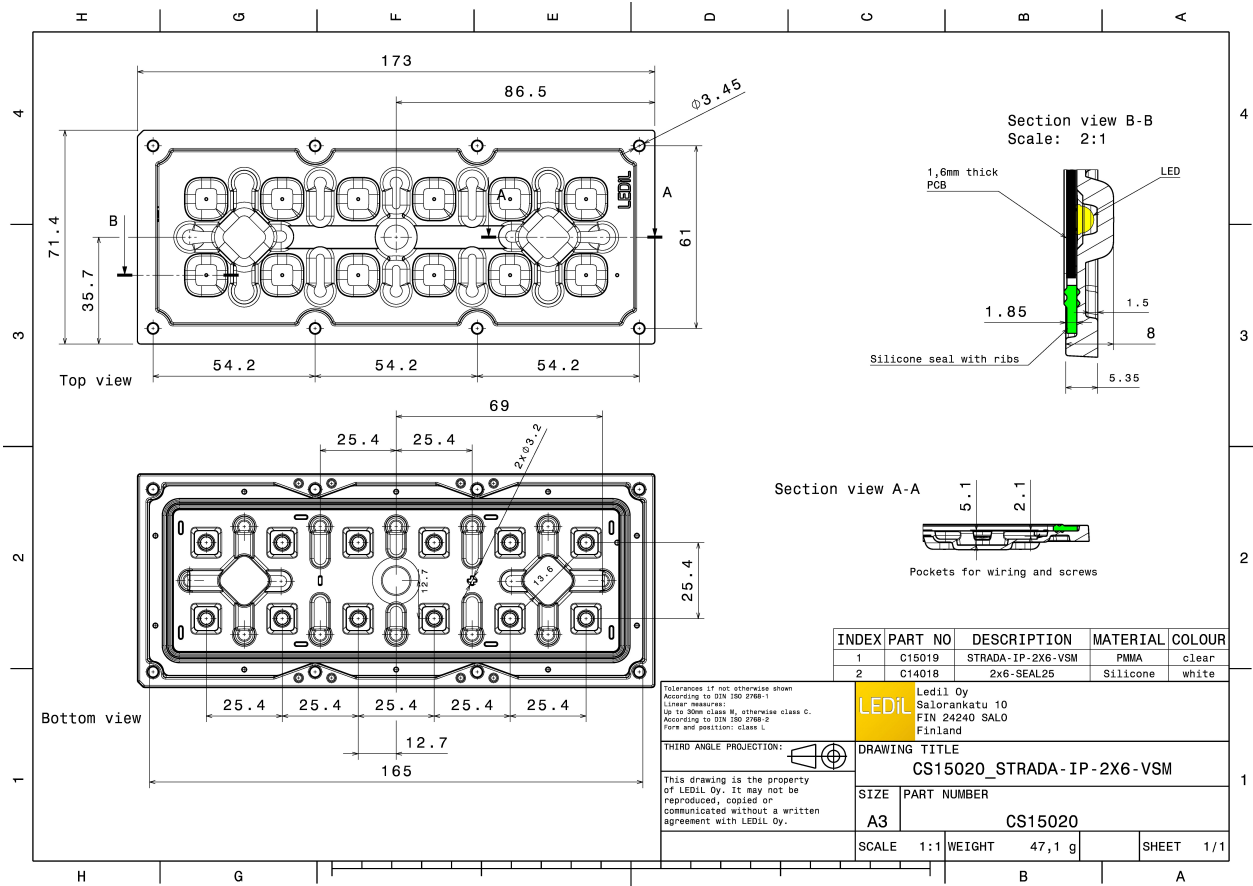

See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)


#### PHOTOMETRIC DATA (MEASURED):

<p> <b>LED</b> Bridgelux SMD 5050</p> <p><b>FWHM / FWTM</b> 136.0° / 146.0°</p> <p><b>Efficiency</b> 94 %</p> <p><b>Peak intensity</b> 0.4 cd/lm</p> <p><b>LEDs/each optic</b> 1</p> <p><b>Light colour</b> White</p> <p><b>Required components:</b></p>	
<p> <b>LED</b> QUICK FLUX 2x6 LED XG xxx G7+</p> <p><b>FWHM / FWTM</b> Asymmetric</p> <p><b>Efficiency</b> 94 %</p> <p><b>Peak intensity</b> 0.5 cd/lm</p> <p><b>LEDs/each optic</b> 1</p> <p><b>Light colour</b> White</p> <p><b>Required components:</b></p>	
<p> <b>LED</b> QUICK FLUX 2x6 LED XT xxx G5</p> <p><b>FWHM / FWTM</b> 136.0° / 149.0°</p> <p><b>Efficiency</b> 94 %</p> <p><b>Peak intensity</b> 0.5 cd/lm</p> <p><b>LEDs/each optic</b> 1</p> <p><b>Light colour</b> White</p> <p><b>Required components:</b></p>	
<p> <b>LED</b> XP-G2</p> <p><b>FWHM / FWTM</b> 140.0° / 146.0°</p> <p><b>Efficiency</b> %</p> <p><b>Peak intensity</b> 0.6 cd/lm</p> <p><b>LEDs/each optic</b> 1</p> <p><b>Light colour</b> White</p> <p><b>Required components:</b></p>	

#### PHOTOMETRIC DATA (MEASURED):


##### CREE LED

LED XP-G3  
 FWHM / FWTM 141.0° / 153.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

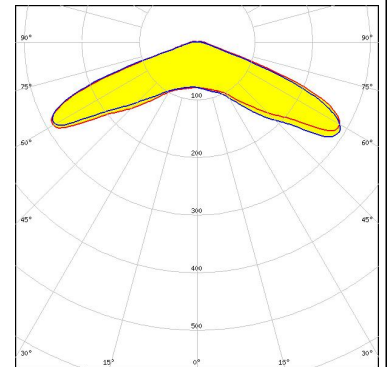


##### CREE LED

LED XP-L HD  
 FWHM / FWTM 145.0° / 154.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

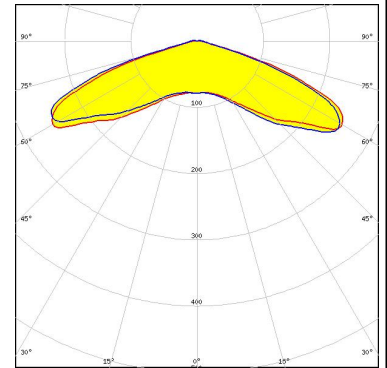


##### CREE LED

LED XP-L2  
 FWHM / FWTM 142.0° / 159.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

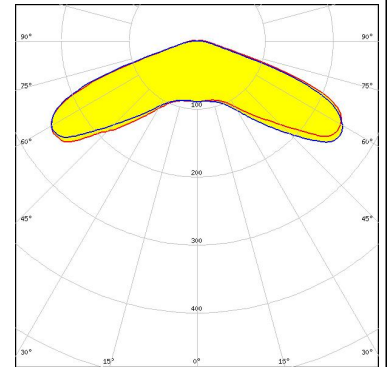

##### CREE LED


LED XT-E  
 FWHM / FWTM 142.0° / 158.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

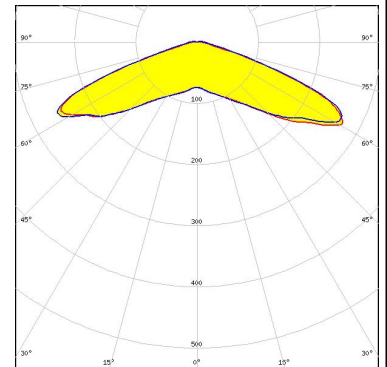


#### PHOTOMETRIC DATA (MEASURED):




LED XT-E HE  
 FWHM / FWTM 132.0° / 145.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/m  
 LEDs/each optic 1  
 Light colour White  
 Required components:

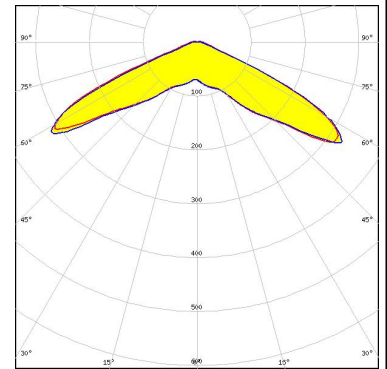


LED LUXEON T  
 FWHM / FWTM 137.0° / 142.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/m  
 LEDs/each optic 1  
 Light colour White  
 Required components:

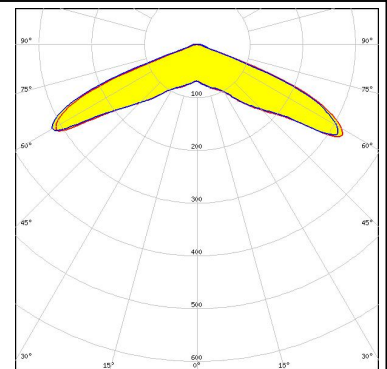





LED LUXEON V  
 FWHM / FWTM 139.0° / 149.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/m  
 LEDs/each optic 1  
 Light colour White  
 Required components:

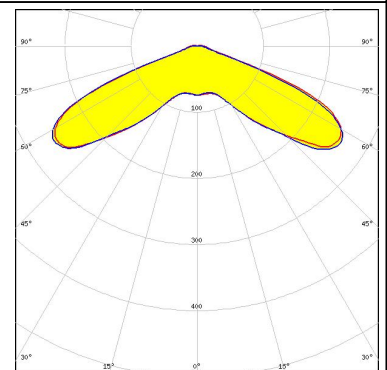

LED LUXEON V2  
 FWHM / FWTM 136.0° / 144.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/m  
 LEDs/each optic 1  
 Light colour White  
 Required components:

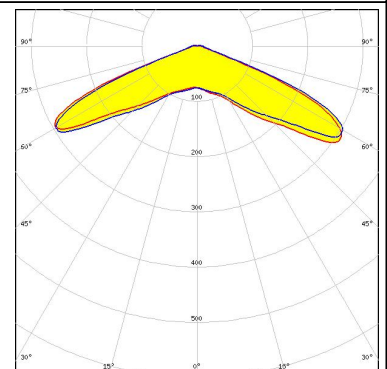


#### PHOTOMETRIC DATA (MEASURED):
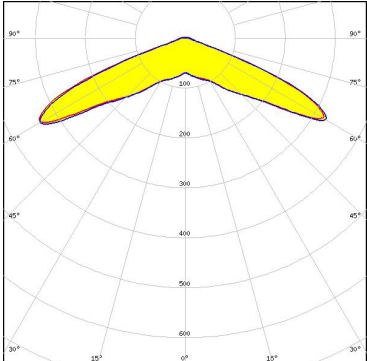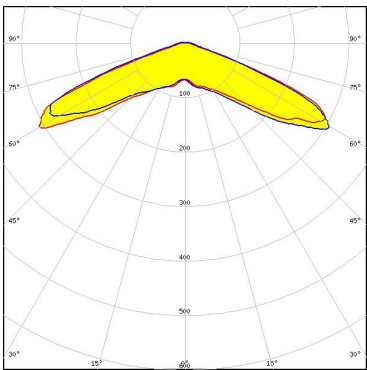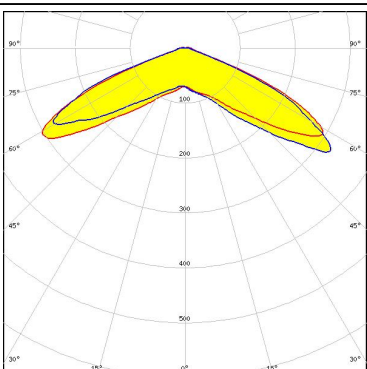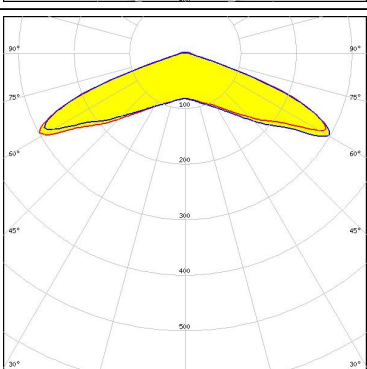
<p><b>LUMILEDS</b></p> <p>LED LUXEON XR-TX (L2T0-xyyy012M)</p> <p>FWHM / FWTM 137.0° / 145.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>LUMINUS</b></p> <p>LED SST-10-B130</p> <p>FWHM / FWTM 138.0° / 146.0°</p> <p>Efficiency 96 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour Deep Red</p> <p>Required components:</p>	
<p><b>MST</b> <i>Your solutions</i></p> <p>LED RecLED 146x45mm 2900lm 730 STRADA-IP-2x6 G1</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 97 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>NICHIA</b></p> <p>LED NVSW219D</p> <p>FWHM / FWTM 141.0° / 150.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	


#### PHOTOMETRIC DATA (MEASURED):




LED NVSW219F  
 FWHM / FWTM 141.0° / 147.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

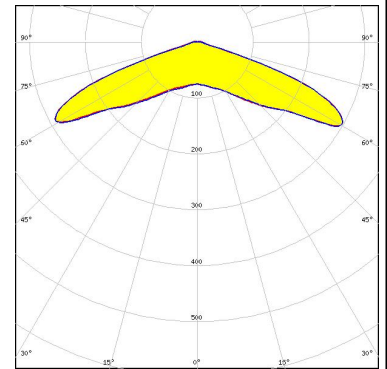


LED NVSW319B  
 FWHM / FWTM 145.0° / 153.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

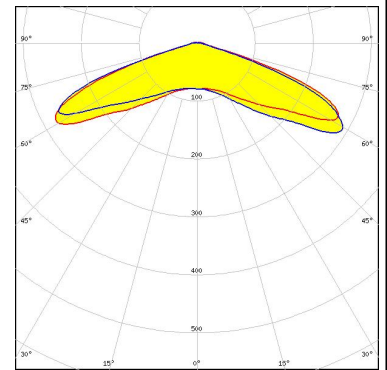

LED NVSW3x9A  
 FWHM / FWTM 140.0° / 149.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

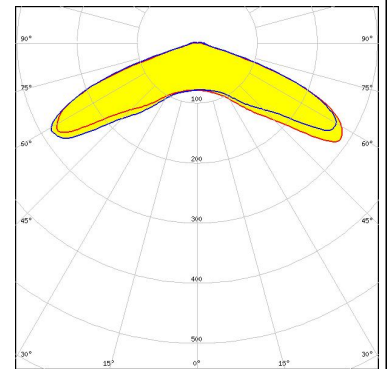


LED NVSxx19B/NVSxx19C  
 FWHM / FWTM 140.0° / 149.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

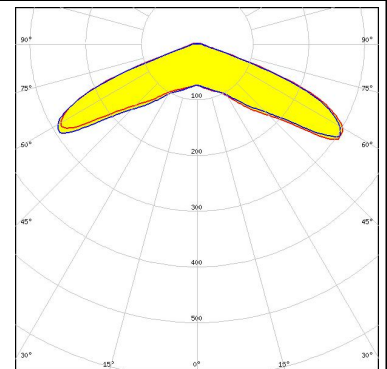

#### PHOTOMETRIC DATA (MEASURED):


#### OSRAM

LED PrevaLED Brick HP IP 2x6  
 FWHM / FWTM 138.0° / 146.0°  
 Efficiency 97 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

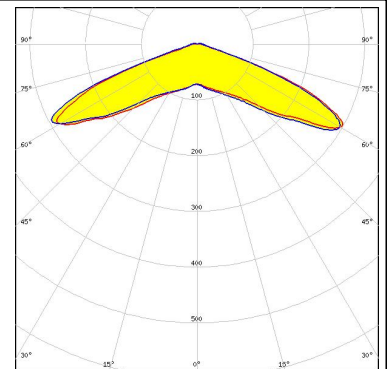


#### OSRAM

LED Duris S8  
 FWHM / FWTM 137.0° / 148.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

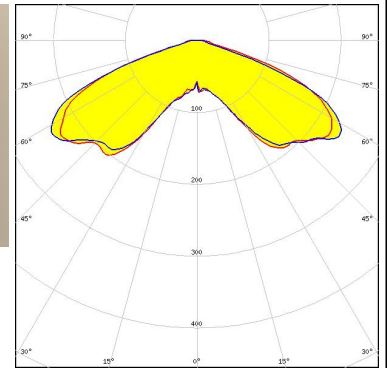


#### PHILIPS

LED Fortimo FastFlex LED 2x6 DP G4  
 FWHM / FWTM 140.0° / 146.0°  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

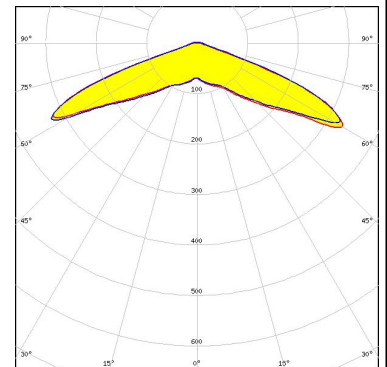

#### PHILIPS

LED Fortimo FastFlex LED 2x6 DP G5  
 FWHM / FWTM 139.0° / 148.0°  
 Efficiency 97 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

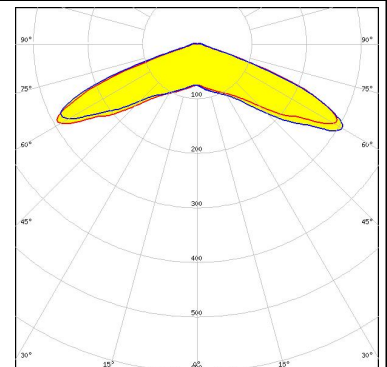




#### PHOTOMETRIC DATA (MEASURED):


### PHILIPS

LED Fortimo FastFlex LED 2x6 DP HE  
 FWHM / FWTM 138.0° / 150.0°  
 Efficiency 98 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

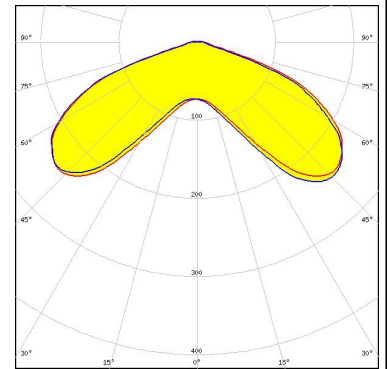


### SAMSUNG

LED HiLOM RM12 ZP (LH502C)  
 FWHM / FWTM 138.0° / 150.0°  
 Efficiency 98 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

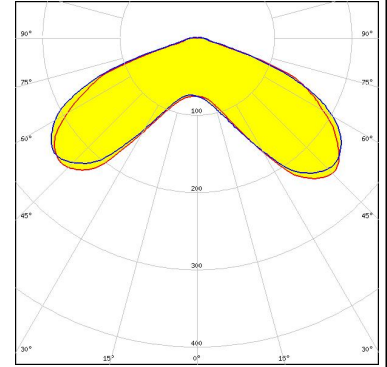


### SCIOLUX

LED ROY-S26XPL2 (XP-L2)  
 FWHM / FWTM 141.0° / 158.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

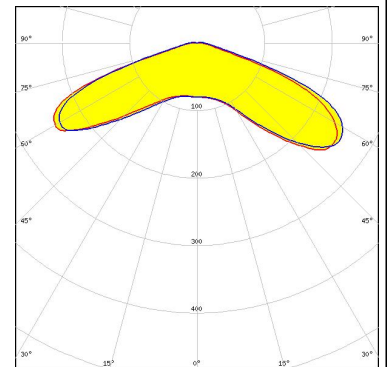

### SCIOLUX


LED XLE-S22C4XTEHE (XT-E HE)  
 FWHM / FWTM 132.0° / 145.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

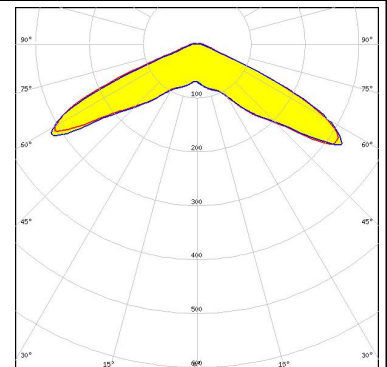

#### PHOTOMETRIC DATA (MEASURED):


#### SCIOLUX

LED XLE-S26XHP35 (XHP35 HD)  
 FWHM / FWTM 148.0° / 160.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

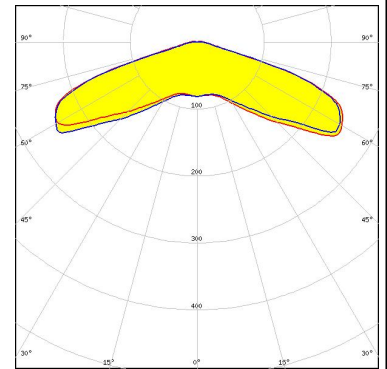


#### SEOUL SEMICONDUCTOR

LED 2x6 5050 module - SMJD-3625012F-XX  
 FWHM / FWTM 135.0° / 146.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

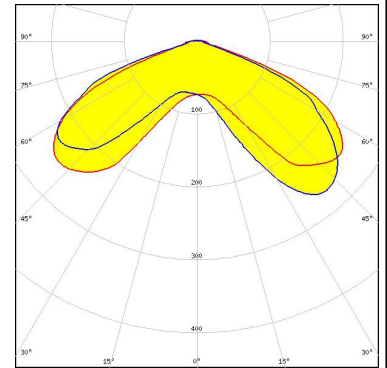


#### SEOUL SEMICONDUCTOR

LED SMJQ-D36W12Mx  
 FWHM / FWTM 131.0° / 141.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:




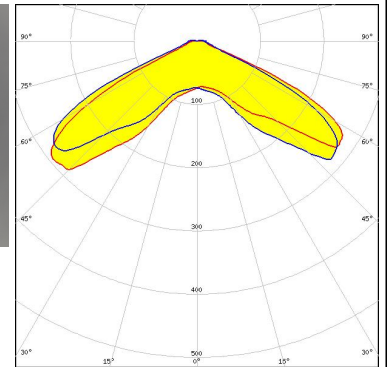


#### SEOUL SEMICONDUCTOR

LED SMJQ-D36W12Px  
 FWHM / FWTM 137.0° / 146.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

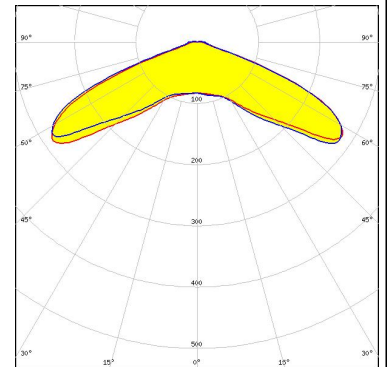


#### PHOTOMETRIC DATA (MEASURED):
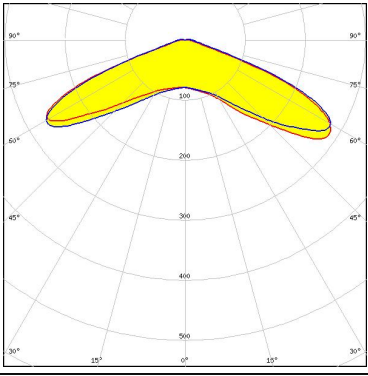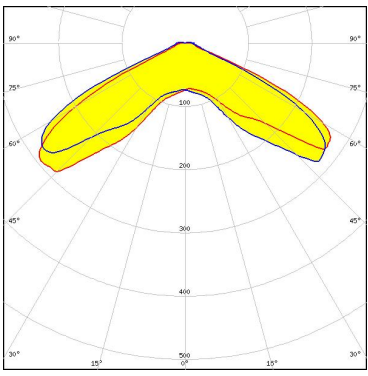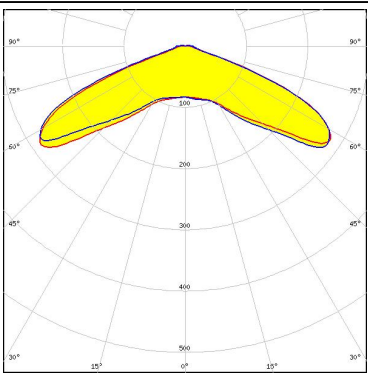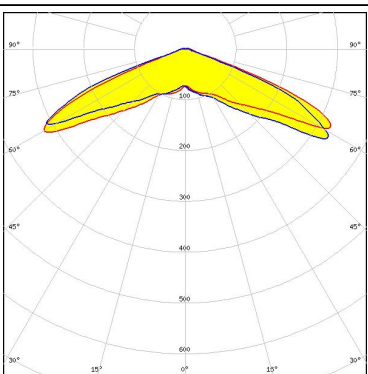
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z5M3            FWHM / FWTM 141.0° / 154.0°            Efficiency 97 %            Peak intensity 0.5 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z8Y22            FWHM / FWTM 131.0° / 141.0°            Efficiency 94 %            Peak intensity 0.5 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z8Y22P            FWHM / FWTM 137.0° / 146.0°            Efficiency 94 %            Peak intensity 0.5 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>TRIDONIC</b></p> <p>LED RLE 2x6 3000lm HP EXC2 OTD            FWHM / FWTM 138.0° / 144.0°            Efficiency 94 %            Peak intensity 0.6 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	


#### PHOTOMETRIC DATA (SIMULATED):




LED J Series 5050 Round LES  
 FWHM / FWTM 141.0° / 153.0°  
 Efficiency 95 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

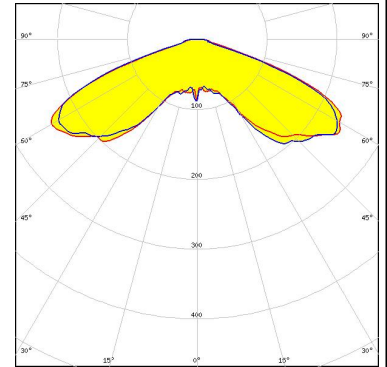


LED J Series 5050 Round LES  
 FWHM / FWTM 143.0° / 156.0°  
 Efficiency 94 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

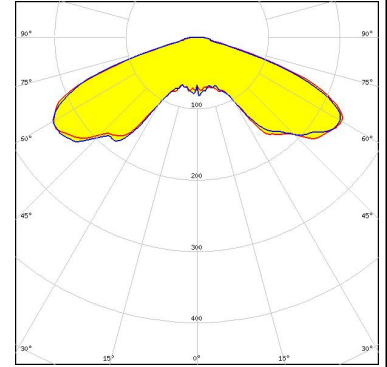

LED J Series 5050 Square LES  
 FWHM / FWTM 142.0° / 155.0°  
 Efficiency 95 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

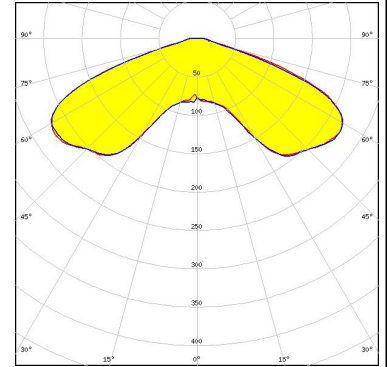


LED XHP35 HD  
 FWHM / FWTM 157.0° / 171.0°  
 Efficiency 93 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

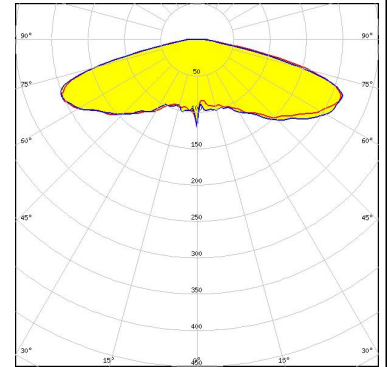


#### PHOTOMETRIC DATA (SIMULATED):



LED XP-G2 HE  
 FWHM / FWTM 150.0° / 161.0°  
 Efficiency 93 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

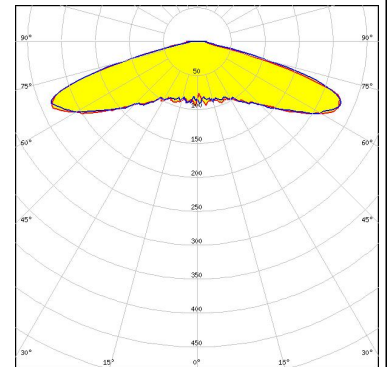


LED LUXEON 5050 Round LES  
 FWHM / FWTM 139.0° / 152.0°  
 Efficiency 82 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

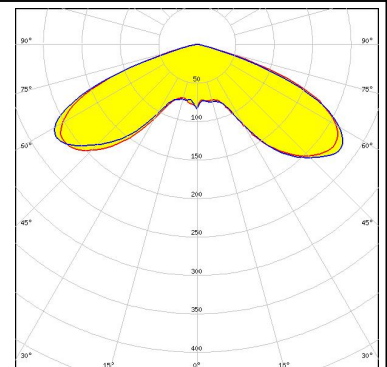


Protective plate, glass



LED LUXEON 5050 Round LES  
 FWHM / FWTM 143.0° / 156.0°  
 Efficiency 92 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

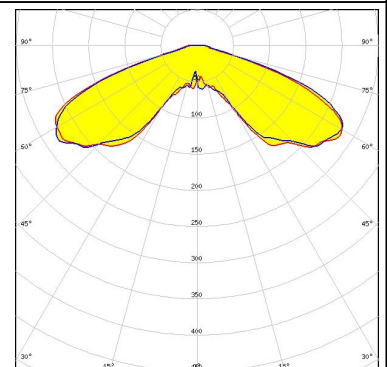


LED NV4WB35AM  
 FWHM / FWTM 143.0° / 154.0°  
 Efficiency 95 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

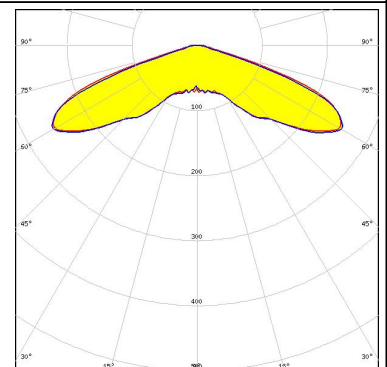


#### PHOTOMETRIC DATA (SIMULATED):




LED NVSxE21A  
 FWHM / FWTM 136.0° / 145.0°  
 Efficiency 93 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

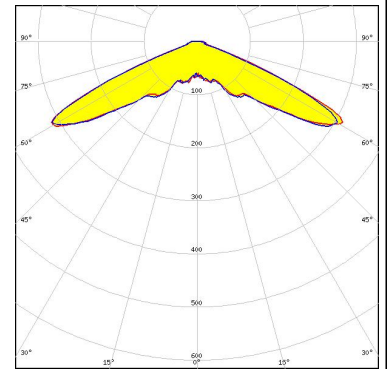


LED OSCONIQ P 3030  
 FWHM / FWTM 141.0° / 154.0°  
 Efficiency 95 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

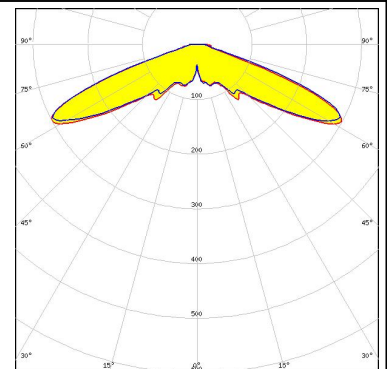

LED OSCONIQ P 3737 (3W version)  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

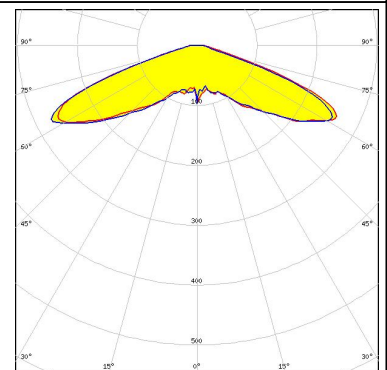

LED OSCONIQ P 3737 (3W version)  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

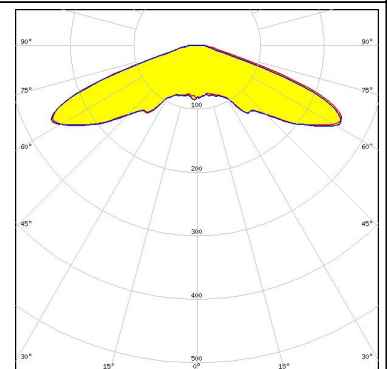


### PHOTOMETRIC DATA (SIMULATED):

#### OSRAM

Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM 142.0° / 156.0°  
 Efficiency 91 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

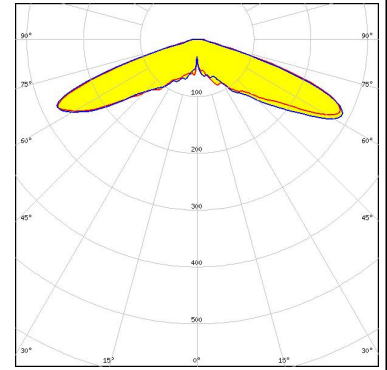

#### OSRAM


Opto Semiconductors

LED OSLON SSL 150  
 FWHM / FWTM 145.0° / 157.0°  
 Efficiency 93 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

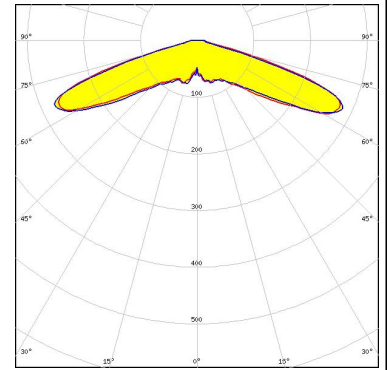


#### PHILIPS

LED Fortimo FastFlex LED 2x6 DPX G4  
 FWHM / FWTM 144.0° / 158.0°  
 Efficiency 89 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

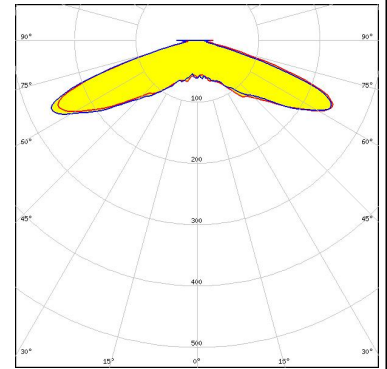

#### SAMSUNG


LED LH351C  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

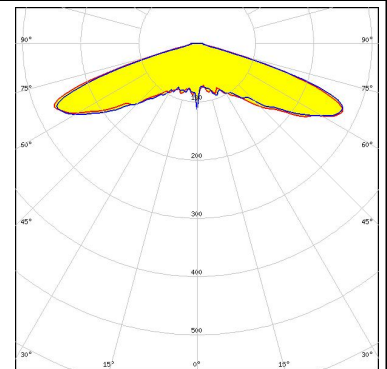

#### PHOTOMETRIC DATA (SIMULATED):


### SAMSUNG

LED LH351D  
 FWHM / FWTM 156.0° / 164.0°  
 Efficiency 94 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

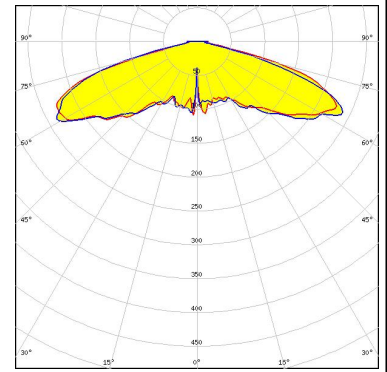


SEOUL SEMICONDUCTOR

LED Z5M1/Z5M2  
 FWHM / FWTM 131.0° / 140.0°  
 Efficiency 92 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

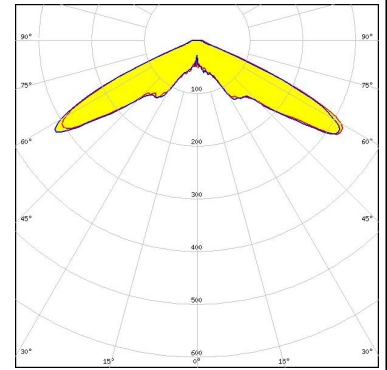

SEOUL SEMICONDUCTOR

LED Z5M4  
 FWHM / FWTM 138.0° / 150.0°  
 Efficiency 95 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

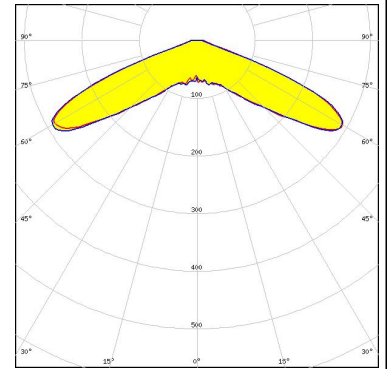



#### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Lighting Lenses Assemblies](#) category:*

*Click to view products by [Ledil](#) manufacturer:*

Other Similar products are found below :

[FCN12592\\_LE1-D-COP](#) [CA16129\\_OLGA-W](#) [CA16370\\_HB-SQ-W](#) [FN15972\\_RONDA-ZT45-C](#) [CS15759\\_HB-2X2MX-8-W](#)  
[CA16435\\_LXP2-SS-WAS](#) [CN16210\\_GABRIELLA-MIDI-W](#) [CP17137\\_CARMEN-M2-C](#) [CA16015\\_STRADA-SQ-SCL](#) [CP17594\\_TINA-SC-](#)  
[RS](#) [CS15767\\_HB-2X2MX-8-M](#) [CP10960\\_RGBX-SS](#) [CP12395\\_LXP3-W](#) [CP12939\\_LARISA-RS-CLIP16](#) [C14636\\_XTM-PF-ADAPTER](#)  
[CA11819\\_STRADA-SQ-T-DW](#) [CA14508\\_G2-LXP2-D](#) [CA14601\\_VERONICA-SQ-MINI-RS](#) [FCP13895\\_SEANNA-A](#) [CP12943\\_LARISA-](#)  
[O-CLIP16](#) [FP11124\\_LISA2-O-PIN](#) [CS14597\\_HB-IP-2X6-O](#) [CP14995\\_FLORENTINA-HLD-O](#) [CS15158\\_STRADA-IP-2X6-T4-B](#)  
[CS16323\\_STRADELLA-IP-28-HB-M](#) [FN14976\\_STELLA-DWC2](#) [FN15264\\_STELLA-HB-WWW](#) [CA15584\\_ZORYA-MINI-TAPE](#)  
[FA15229\\_ROSE-MRK-S](#) [FA15232\\_ROSE-MRK-M](#) [FA15233\\_ROSE-MRK-W](#) [FCN13552\\_CRYSTAL-RS](#) [FN15552\\_RONDA-W](#)  
[FS15626\\_FLORENCE-3R-IP-Z90](#) [FS15786\\_FLORENCE-3R-IP-Z60](#) [FS15847\\_FLORENCE-3R-IP-O](#) [CA14505\\_G2-LXP2-RS2-P](#)  
[FCN12775\\_IRIS-O](#) [CP15304\\_LARISA-RS-PIN](#) [FN15679\\_RONDA-S](#) [CA15519\\_VERONICA-SQ-MINI-D](#) [FP14414\\_LISA2-O-PIN](#)  
[LL01CR-DF60L06-M2](#) [FN15993\\_RONDA-O](#) [FN15977\\_RONDA-WAS2](#) [CA14366\\_FLARE-MAXI-TAPE](#) [CA14442\\_VERONICA-SQ-W](#)  
[CA14509\\_G2-LXP2-M-P](#) [CA15231\\_VERONICA-SQ-MINI-W](#) [FP11002\\_LISA2-W-PIN](#)