

FLORENTINA-4X1-RS

~10° spot beam

TECHNICAL SPECIFICATIONS:

Dimensions 169.7 x 49.7 mm

Height 28.5 mm

Fastening pin

ROHS compliant yes 1



MATERIAL SPECIFICATIONS:

ComponentTypeMaterialColourFinishROSE-B-B-RSSingle lensPCclearFLORENTINA-4X1-HLDHolderPCblack

ORDERING INFORMATION:

Component


Qty in box MOQ MPQ Box weight (kg)

FCP15344_FLORENTINA-4X1-RS
Single lens 72 72 8 3.4

» Box size: 476 x 273 x 292 mm



PRODUCT DATASHEET FCP15344_FLORENTINA-4X1-RS

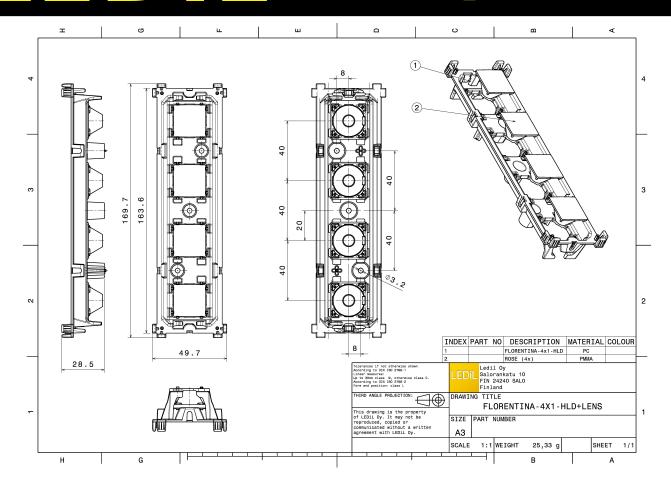

See also our general installation guide: www.ledil.com/installation_guide



PHOTOMETRIC DATA (MEASURED):




EASY-T FLUX 1x4 FLR XG xxx G7

FWHM / FWTM 11.0° / 25.0°
Efficiency 80 %
Peak intensity 12.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C15028_FLORENTINA-4X1-SHD






CONET

LED EASY-T FLUX 1x4 FLR XT xxx G5

FWHM / FWTM 10.0° / 23.0°
Efficiency 81 %
Peak intensity 15.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C15028_FLORENTINA-4X1-SHD






CREE - LED

LED XP-G2
FWHM / FWTM 10.0° / 20.0°
Efficiency 83 %
Peak intensity 19 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C15690_FLORENTINA-4X1-SHD-WHT






CREE - LED

LED XP-G2
FWHM / FWTM 10.0° / 19.0°
Efficiency 82 %
Peak intensity 19 cd/lm
LEDs/each optic 1
Light colour White
Required components:


C15198_FLORENTINA-4X1-SHD-OPEN








PHOTOMETRIC DATA (MEASURED):

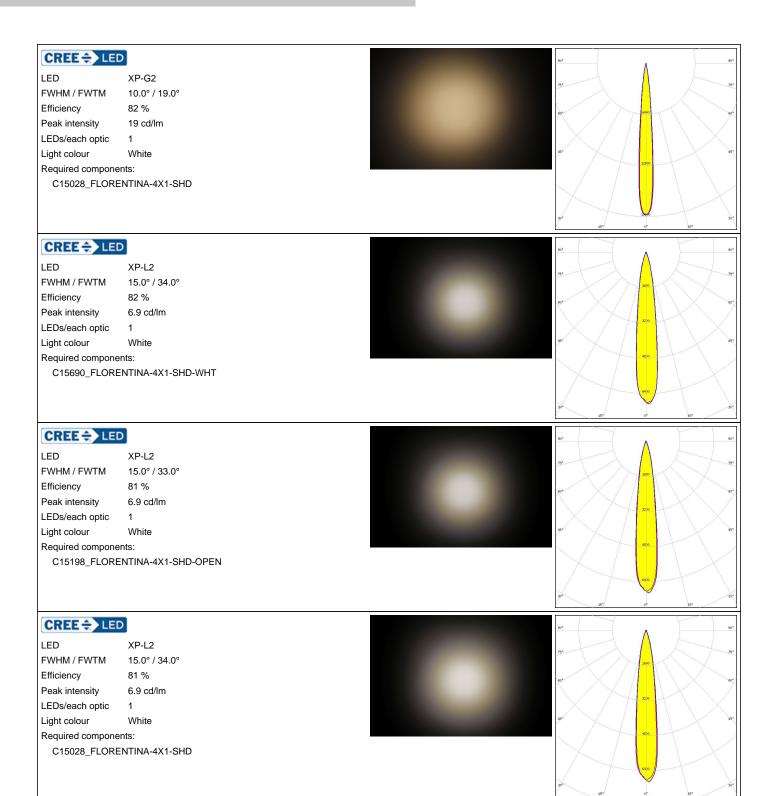



PHOTOMETRIC DATA (MEASURED):

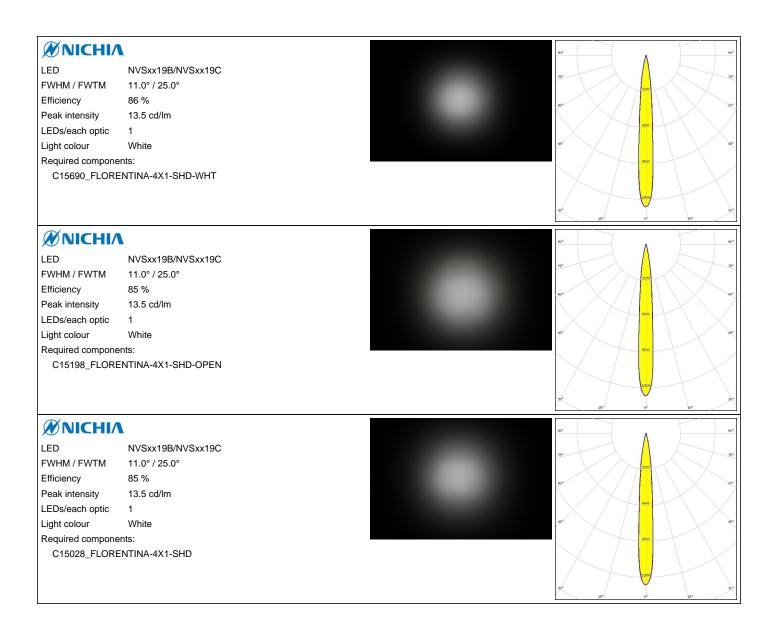



PHOTOMETRIC DATA (SIMULATED):




LED XP-L HD
FWHM / FWTM 16.0° / 28.0°
Efficiency 85 %
Peak intensity 9.2 cd/lm
LEDs/each optic 1

Required components:

Light colour

C15198_FLORENTINA-4X1-SHD-OPEN


White



CREE - LED

LED XP-L HD
FWHM / FWTM 16.0° / 31.0°
Efficiency 77 %
Peak intensity 7.4 cd/lm
LEDs/each optic 1
Light colour White

Required components: C15028_FLORENTINA-4X1-SHD



PRODUCT DATASHEET FCP15344_FLORENTINA-4X1-RS

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Lenses Assemblies category:

Click to view products by Ledil manufacturer:

Other Similar products are found below:

FCN12592_LE1-D-COP_CA16129_OLGA-W_CA16370_HB-SQ-W_FN15972_RONDA-ZT45-C_CS15759_HB-2X2MX-8-W_CA16435_LXP2-SS-WAS_CN16210_GABRIELLA-MIDI-W_CP17137_CARMEN-M2-C_CA16015_STRADA-SQ-SCL_CP17594_TINA-SC-RS_CS15767_HB-2X2MX-8-M_CP10960_RGBX-SS_CP12395_LXP3-W_CP12939_LARISA-RS-CLIP16_C14636_XTM-PF-ADAPTER_CA11819_STRADA-SQ-T-DW_CA14508_G2-LXP2-D_CA14601_VERONICA-SQ-MINI-RS_FCP13895_SEANNA-A_CP12943_LARISA-O-CLIP16_FP11124_LISA2-O-PIN_CS14597_HB-IP-2X6-O_CP14995_FLORENTINA-HLD-O_CS15158_STRADA-IP-2X6-T4-B_CS16323_STRADELLA-IP-28-HB-M_FN14976_STELLA-DWC2_FN15264_STELLA-HB-WWW_CA15584_ZORYA-MINI-TAPE_FA15229_ROSE-MRK-S_FA15232_ROSE-MRK-M_FA15233_ROSE-MRK-W_FCN13552_CRYSTAL-RS_FN15552_RONDA-W_FS15626_FLORENCE-3R-IP-Z90_FS15786_FLORENCE-3R-IP-Z60_FS15847_FLORENCE-3R-IP-O_CA14505_G2-LXP2-RS2-P_FCN12775_IRIS-O_CP15304_LARISA-RS-PIN_FN15679_RONDA-S_CA15519_VERONICA-SQ-MINI-D_FP14414_LISA2-O-PIN_LL01CR-DF60L06-M2_FN15993_RONDA-O_FN15977_RONDA-WAS2_CA14366_FLARE-MAXI-TAPE_CA14442_VERONICA-SQ-W_CA14509_G2-LXP2-M-P_CA15231_VERONICA-SQ-MINI-W_FP11002_LISA2-W-PIN_CA1520_LISA2-W-PIN_CA