

FLORENTINA-4X1-O

~45° + 15° oval beam

TECHNICAL SPECIFICATIONS:

Dimensions	169.7 x 49.7 mm
Height	28.5 mm
Fastening	pin
ROHS compliant	yes 🛈




MATERIAL SPECIFICATIONS:

Component	Туре	Material	Colour	Finish
ROSE-CMC-O	Single lens	PC	clear	
FLORENTINA-4X1-HLD	Holder	PC	black	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FCP15347_FLORENTINA-4X1-O	Single lens	72	72	8	3.4
» Box size: 476 x 273 x 292 mm					



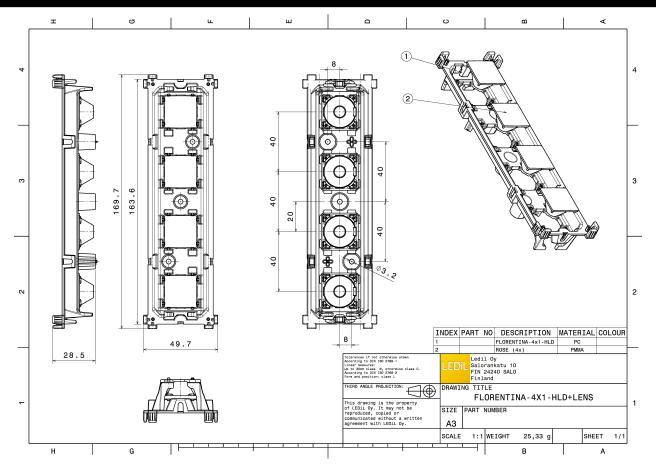

See also our general installation guide: <u>www.ledil.com/installation_guide</u>



PHOTOMETRIC DATA (MEASURED):

CONET LED EASY-T FLUX 1x4 FLR XG xxx G7 FWHM / FWTM 43.0 + 16.0° / 70.0 + 33.0° Efficiency 75 % Peak intensity 2.8 cd/lm LEDs/each optic 1 Light colour White Required components: C15028_FLORENTINA-4X1-SHD COMET LED EASY-T FLUX 1x4 FLR XT xxx G5 FWHM / FWTM 44.0 + 16.0° / 71.0 + 32.0° Efficiency 72 % Peak intensity 2.9 cd/lm LEDs/each optic 1 White Light colour Required components: C15028_FLORENTINA-4X1-SHD CREE 2 LED LED XP-G2 FWHM / FWTM 41.0 + 17.0° / 102.0° Efficiency 71 % Peak intensity 2.9 cd/lm LEDs/each optic 1 Light colour White Required components: C15198_FLORENTINA-4X1-SHD-OPEN LED XP-G2 FWHM / FWTM 41.0 + 17.0° / 70.0 + 32.0° Efficiency 71 % Peak intensity 2.9 cd/lm LEDs/each optic 1 White Light colour

Required components: C15028_FLORENTINA-4X1-SHD



3/7



PHOTOMETRIC DATA (MEASURED):

		50 ⁴
LED FWHM / FWTM		
Efficiency	76 %	
Peak intensity	2.3 cd/lm	
LEDs/each optic	1	
Light colour	White	gr i i i i i i i i i i i i i i i i i i i
Required compone		
C15690_FLORE	ENTINA-4X1-SHD-WHT	
		\times
		30" 2000 St 20" 0" 10"
		20* ×
LED	XP-L2	
FWHM / FWTM	42.0 + 19.0° / 70.0 + 40.0°	
Efficiency	72 %	510 500 C
Peak intensity	2.3 cd/lm	
LEDs/each optic	1	
Light colour	White	gr i i i i i i i i i i i i i i i i i i i
Required compone		
C15198_FLORE	ENTINA-4X1-SHD-OPEN	
		30" 200 30 15" 0" 15"
		90 ⁴ 90
LED	XP-L2	
FWHM / FWTM	43.0 + 19.0° / 70.0 + 40.0°	
Efficiency	72 %	594
Peak intensity	2.3 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required compone		
C15028_FLORE	ENTINA-4X1-SHD	
		30 ⁴ 300 30 30 ⁵ 0 ⁵ 30 ⁵
ØNICHI/		904
LED	NVSxx19B/NVSxx19C	77
FWHM / FWTM	44.0 + 16.0° / 71.0 + 31.0°	
Efficiency		
LINCIENCY	78 %	
Peak intensity	78 % 2.9 cd/lm	
Peak intensity LEDs/each optic	2.9 cd/lm 1	
Peak intensity LEDs/each optic Light colour	2.9 cd/lm 1 White	
Peak intensity LEDs/each optic Light colour Required compone	2.9 cd/lm 1 White ints:	
Peak intensity LEDs/each optic Light colour Required compone	2.9 cd/lm 1 White	
Peak intensity LEDs/each optic Light colour Required compone	2.9 cd/lm 1 White ints:	97 - 109 - 109 - 109 - 109 - 109 - 109 - 109 - 109 - 109 - 109 - 109 - 109 - 109 - 109 - 109 - 109 - 109 - 109
Peak intensity LEDs/each optic Light colour Required compone	2.9 cd/lm 1 White ints:	e 109 e



PHOTOMETRIC DATA (MEASURED):

Mauch		
𝖉 NICHI∕		90 ⁴
LED	NVSxx19B/NVSxx19C	29
FWHM / FWTM	44.0 + 16.0° / 70.0 + 31.0°	
Efficiency	75 %	60 ¹
Peak intensity	2.9 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required compone		
C15198_FLORE	ENTINA-4X1-SHD-OPEN	200
		\times / \times / \times /
		30" 30 20" 50° 30
ØNICHI		90 ⁴
LED	NVSxx19B/NVSxx19C	
FWHM / FWTM	44.0 + 16.0° / 70.0 + 31.0°	77
Efficiency	79 %	
Peak intensity	2.9 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required compone	ents:	
C15028_FLORE	ENTINA-4X1-SHD	200
		30" 10 30
OSRAM Opto Semiconductors		30 ⁴ 30
LED	OSLON Square CSSRM2/CSSRM3	
LED FWHM / FWTM	OSLON Square CSSRM2/CSSRM3 44.0 + 15.0° / 69.0 + 30.0°	
FWHM / FWTM	44.0 + 15.0° / 69.0 + 30.0°	
FWHM / FWTM Efficiency	44.0 + 15.0° / 69.0 + 30.0° 69 %	
FWHM / FWTM Efficiency Peak intensity	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents:	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents:	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C15198_FLORE	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents:	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C15198_FLORE	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents: ENTINA-4X1-SHD-OPEN	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C15198_FLORE	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents: ENTINA-4X1-SHD-OPEN OSLON Square CSSRM2/CSSRM3	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C15198_FLORE	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents: ENTINA-4X1-SHD-OPEN OSLON Square CSSRM2/CSSRM3 44.0 + 15.0° / 70.0 + 30.0°	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C15198_FLORE	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents: ENTINA-4X1-SHD-OPEN OSLON Square CSSRM2/CSSRM3 44.0 + 15.0° / 70.0 + 30.0° 74 %	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C15198_FLORE	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents: ENTINA-4X1-SHD-OPEN OSLON Square CSSRM2/CSSRM3 44.0 + 15.0° / 70.0 + 30.0° 74 % 3 cd/lm	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C15198_FLORE	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents: ENTINA-4X1-SHD-OPEN OSLON Square CSSRM2/CSSRM3 44.0 + 15.0° / 70.0 + 30.0° 74 % 3 cd/lm 1	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C15198_FLORE	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents: ENTINA-4X1-SHD-OPEN OSLON Square CSSRM2/CSSRM3 44.0 + 15.0° / 70.0 + 30.0° 74 % 3 cd/lm 1 White	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C15198_FLORE Opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents: ENTINA-4X1-SHD-OPEN OSLON Square CSSRM2/CSSRM3 44.0 + 15.0° / 70.0 + 30.0° 74 % 3 cd/lm 1 White ents:	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C15198_FLORE Opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents: ENTINA-4X1-SHD-OPEN OSLON Square CSSRM2/CSSRM3 44.0 + 15.0° / 70.0 + 30.0° 74 % 3 cd/lm 1 White	
FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C15198_FLORE Opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	44.0 + 15.0° / 69.0 + 30.0° 69 % 3 cd/lm 1 White ents: ENTINA-4X1-SHD-OPEN OSLON Square CSSRM2/CSSRM3 44.0 + 15.0° / 70.0 + 30.0° 74 % 3 cd/lm 1 White ents:	



PHOTOMETRIC DATA (SIMULATED):

		90° - 90°
LED FWHM / FWTM	XP-L HD 10.0 + 25.0° / 20.0 + 45.0°	37 - 77 -
Efficiency Peak intensity	198 % 2.5 cd/lm	
LEDs/each optic Light colour Required components:	1 White	g- <u>500</u> g-
C15028_FLORENTI		
		30 ⁴ 200 30 ⁴



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc. 228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd. # 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/ where_to_buy

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Lenses Assemblies category:

Click to view products by Ledil manufacturer:

Other Similar products are found below :

FCN12592_LE1-D-COP_CA16129_OLGA-W_CA16370_HB-SQ-W_FN15972_RONDA-ZT45-C_CS15759_HB-2X2MX-8-W CA16435_LXP2-SS-WAS_CN16210_GABRIELLA-MIDI-W_CP17137_CARMEN-M2-C_CA16015_STRADA-SQ-SCL_CP17594_TINA-SC-RS_CS15767_HB-2X2MX-8-M_CP10960_RGBX-SS_CP12395_LXP3-W_CP12939_LARISA-RS-CLIP16_C14636_XTM-PF-ADAPTER CA11819_STRADA-SQ-T-DW_CA14508_G2-LXP2-D_CA14601_VERONICA-SQ-MINI-RS_FCP13895_SEANNA-A_CP12943_LARISA-O-CLIP16_FP11124_LISA2-O-PIN_CS14597_HB-IP-2X6-O_CP14995_FLORENTINA-HLD-O_CS15158_STRADA-IP-2X6-T4-B CS16323_STRADELLA-IP-28-HB-M_FN14976_STELLA-DWC2_FN15264_STELLA-HB-WWW_CA15584_ZORYA-MINI-TAPE FA15229_ROSE-MRK-S_FA15232_ROSE-MRK-M_FA15233_ROSE-MRK-W_FCN13552_CRYSTAL-RS_FN15552_RONDA-W FS15626_FLORENCE-3R-IP-Z90_FS15786_FLORENCE-3R-IP-Z60_FS15847_FLORENCE-3R-IP-O_CA14505_G2-LXP2-RS2-P FCN12775_IRIS-O_CP15304_LARISA-RS-PIN_FN15679_RONDA-S_CA15519_VERONICA-SQ-MINI-D_FP14414_LISA2-O-PIN LL01CR-DF60L06-M2_FN15993_RONDA-O_FN15977_RONDA-WAS2_CA14366_FLARE-MAXI-TAPE_CA14442_VERONICA-SQ-W CA14509_G2-LXP2-M-P_CA15231_VERONICA-SQ-MINI-W_FP11002_LISA2-W-PIN