承 認 書

SPECIFICATION FOR APPROVAL


*客戶名稱	: 立创
Customer name	
*產品名稱	: 按键开关
Product Description	
*產品型號	: RTB-15B4BNBNFA
Product part number	
*客戶料號	: C309225
Customer's material number	
*數量	:0 PCS
Quantity	
*日期	: 2019-8-27
Date	

供應商賃	負責人簽名	客戶負責丿	人確認簽回		
製作人	莫丽琴	承認人			
審核	李跃鑫	審核			
批准	王瑞宝	批准			

皓宇(香港)有限公司 HAOYU (HONG KONG) LIMITED 六均电子五金有限公司 LEGION ELECTRONIC&HARDWARE CO., LTD 富力隆电子 (深圳)有限公司 ROCKTEK ELECTRONICS (SHENZHEN) CO. LTD 東莞市石碣鎮四村第一工業區 Sicun 1st Industrial park, Sicun, Shijie Town, Dongguan 電 話 : (86) 769-82310511-2 Tel No 傳 真 : (86) 769-82310510 Fax No 郵 箱 haoyu888@21cn.com E - mail

核 准 Approved

:

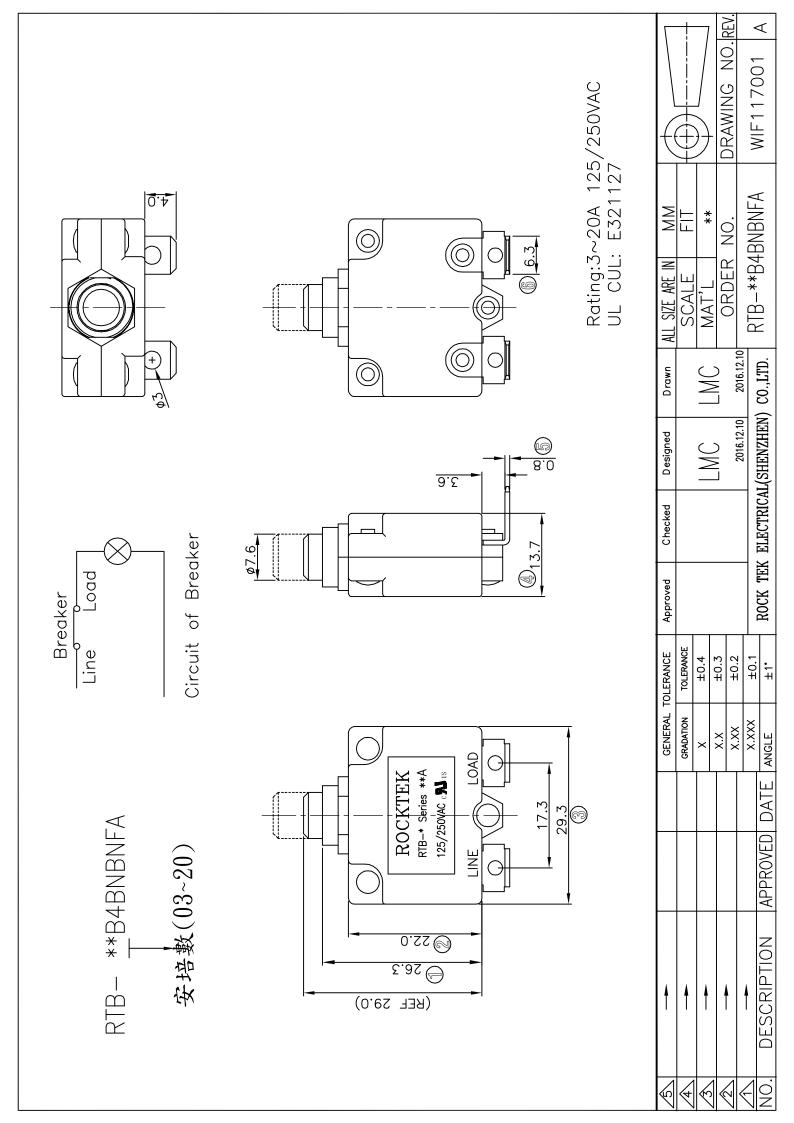

ROCK TEK ELECTRONICS(SHENZHEN) CO., LTD. 富力隆電子(深圳)有限公司

Specification Of RTB1 CIRCUIT-BREAKER

page:1/2

1.Scope

This specification cover the CIRCUIT BREAKER for RTB1 SERIES.

2.Operation temperature

-10°C~60°C

3.STANDHRD

UL 1077,CSA C22.2 NO.235

4.Rating

- 3~20A 125V/250VAC
- 5.Electrical
 - 5.1. Contact resistance

AT DC 0.2V 1A should be $30M\Omega(Max)$.

5.2. Insulation resistance

It is measured with 500V DC should be $1000M\Omega(Min)$.

5.3. Dielectrical strength

(Between terminals of open contacts and terminals of opposite polarity)

Dielectric strength should withstand without breakdown a potential of AC 1500V/minute.

(Between terminals and metal frame)

Dielectric strength should withstand without breakdown a potential of AC 1500V/minute.

ROCK TEK ELECTRONICS(SHENZHEN) CO., LTD. 富力隆電子(深圳)有限公司

Specification Of RTB1 CIRCUIT-BREAKER

page:2/2

6.CIRCUIT BREAKER TRIP TIME VS AMPERES

Model Number	Current Rating	Overload Percentage	Trip Time(in seconds) VS Amperes at+25
RTB series	3~20A	100%	NO. Trip
		1 5004	Trip in 1 hours
		0000/	4.0~40
		300%	1.2~12
		400%	0.6~5.0
		500%	0.4~2.8
		600%	0.3~1.8

APPROVED	CHECK	WRITER	DESCRIPTION		
第 111-271. 王字	第 11-27. 夏春		YALE		

ONLINE CERTIFICATIONS DIRECTORY

QVNU2.E321127 Protectors, Supplementary - Component

Page Bottom

Protectors, Supplementary - Component

See General Information for Protectors, Supplementary - Component

ROCK TEK ELECTRONICS INDUSTRY CORP 98 GUANGUANG RD BAO'AN DISTRICT, GUANLAN TOWN SHENZHEN, GUANGDONG 518110 CHINA

Supplementary protector, Series RTB, followed by suffixes -3, -4, -5, -6, -7, -8, -9, -10, -11, -12, -13, -14, -15, -16, -17, -18, -19, or -20.

Cat. No.	Туре	UG	FW	Max V	Max Amps	тс	OL	sc
RTB f/b -3, -4, -5, -6, -7, -8, -9, -10, -11, -12, -13, -14, -15, -16, -17, -18, -19 or -20.	OC	A	0	125 V ac / 250 V ac	20	2	0	200 A, C1

Marking: Company name and catalog designation. Last Updated on 2016-07-20

Questions?

<u>Print this page</u>

<u>Terms of Use</u>

Page Top

E321127

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2016 UL LLC".



Protectors, Supplementary Certified for Canada - Component

Page Bottom

Protectors, Supplementary Certified for Canada - Component

E321127

See General Information for Protectors, Supplementary Certified for Canada - Component

ROCK TEK ELECTRONICS INDUSTRY CORP 98 GUANGUANG RD BAO'AN DISTRICT, GUANLAN TOWN SHENZHEN, GUANGDONG 518110 CHINA

Supplementary protectorSeries RTB, followed by suffixes -3, -4, -5, -6, -7, -8, -9, -10, -11, -12, -13, -14, -15, -16, -17, -18, -19, or -20.

Cat. No.	Туре	UG	FW	Max V	Max Amps	тс	OL	sc
RTB f/b -3, -4, -5, -6, -7, -8, -9, -10, -11, -12, -13, -14, -15, -16, -17, -18, -19 or -20.	ос	A	0	125 V ac / 250 V ac	20	2	0	200 A ,C1

Marking: Company name, catalog designation and the Recognized Component Mark for Canada **G** The Last Updated on 2016-07-20

Questions?	Print this page	Terms of Use	Page Top	
				2016 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2016 UL LLC".

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by Legion manufacturer:

Other Similar products are found below :

LW1L-M1C10V-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M7E-HRN2 67021K512 67081K512X 701PB580 719-5504-000 MDPSSGLFS 810KSV30B FLT 2U EE 01A MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8646AB6X718UL 8646ABUL FSDWH 9001KXRK 9001T8BK 9533CD4+U574+U4922 1203MRA A22EM01S A595 1202A6 12037A2ULCSA 1203A2UL ABD122N-B 1211390004 ABN111-Y ABN400-R 1211500044 1211580012 1212MRA 1232A6NF RA3CSH6A 1241.1183.7047 1241.2511 1241.3428 1223A2ULCSA 1223MRA 1232AX2119 1241.1183.8000 1241.1183.8029 1241.2506 1241.2606 12MA6 1301940184 RELBARF6X10(PLASTIC)