
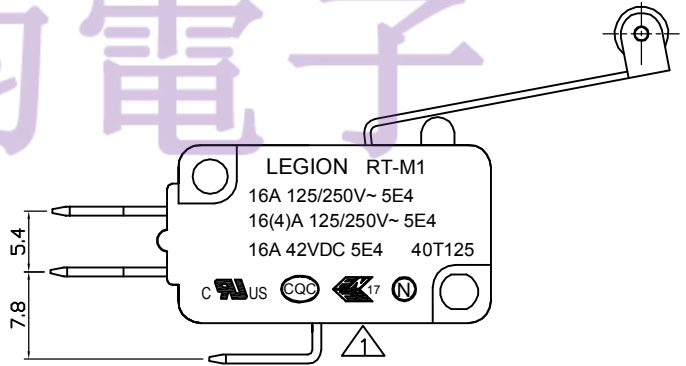
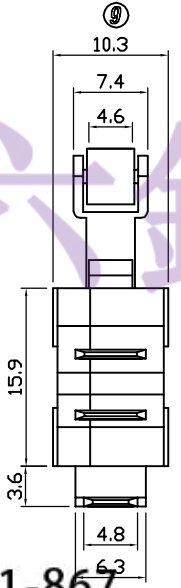
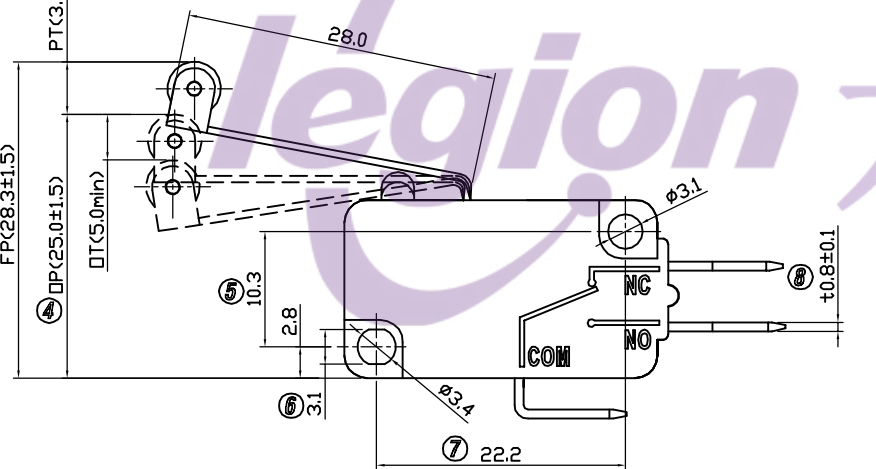


- NOTES:  
 1. Rating : 16A GP 125/250VAC 5E4 40T125  
           16(4)A 125/250VAC 5E4 40T125  
           16A 42VDC 5E4 40T125  
 2. Contact resistance : 50mΩ Max  
 3. Insulation resistance : >100MΩ (Min) 500VDC  
 4. Dielectric strength : >1500VAC 0.5mA 1 minutes  
 5. Electrical life : 50000 cycles

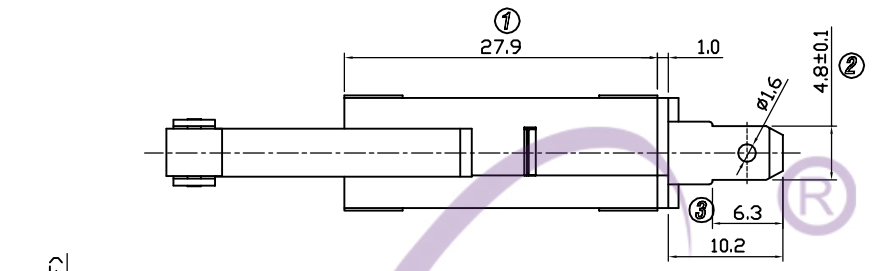

电话: 0769-82310511-867  
 邮箱: hooya89@hooya.hk

A	⑤		DIMENSIONAL TOLERANCES	APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		DRAWING NO.	REV.
	④			RANGE	TOLERANCE	LMC 2019. 05. 15	SCALE	NO				
	③			X	±0.30		MAT'L	***				
	②			X.X	±0.20		MATERIAL NO.	RT-M1-7C3B16A050-A				
	①	增加ENEC, N刻字		X.XX	±0.10	LEGION ELECTRONIC & HARDWARE CO., LTD.		WIF119100	A1			
	NO	DESCRIPTION	ANGLES	±1'								

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Basic / Snap Action Switches](#) category:*

*Click to view products by [Legion](#) manufacturer:*

Other Similar products are found below :

[5SM901-S12](#) [5SM9-S12N195](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE223-6B](#) [624HE17-RB](#) [6HM82](#) [6SE1](#) [6SX1-H58](#) [71051](#) [714-0293](#) [MBH2731](#) [79211923](#) [79218589](#) [MIL30126AB6BBMD4A12XAU](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [8SX26-H33](#) [914CE1-6G](#) [11SM1077-H4](#) [11SM1077-H58](#) [11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#) [11SM77-T](#) [11SM863-T](#) [11SM866](#) [121EN188-R](#) [1245.0120](#) [125EN56-RB](#) [D433V3RD](#) [1267.0101](#) [1267.7101](#) [D4BFC1](#) [12SM4-T2](#) [12SX2-T2](#) [1298.0101](#)