

3~16A
额定电流

技术参数:

产品执行标准: GB17701-2008、 IEC60934: 2000、 UL1077

- 1、额定电器性能: 3~16A 250VAC;
- 2、动作时间标准: 环境温度25℃电流200% (6~32A) 时3到120秒内断开;
- 3、耐压: 2500VAC/0.5mA/1min无闪络、无击穿;
- 4、机械寿命: ≥10000次;
- 5、耐焊时间: ≤3秒焊接温度350±10℃。

电话: 0769-82310511-867


邮箱: hooya89@hooya.hk

品名	底座	上盖	端子类型	带灯类型
WH001-**BR01N3-L22-A	黑色	暗红色	长脚	带红灯

WH001-*****-A

额定电流: 03~16A

端子类型 (参考)

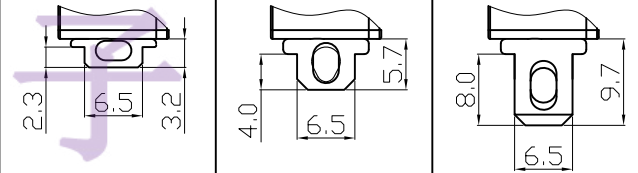


短脚

中长脚

长脚

开孔尺寸参考



THICKNESS	DIMENSION A
0.8~1.0	29.0 ^{+0.1} ₀
1.1~1.4	29.5 ^{+0.1} ₀
1.5~2.5	30.0 ^{+0.1} ₀

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM	
4	→	9	→	RANGE	TOLERANCE				LMC	SCALE	NO	
3	→	8	→	X	±0.30				2019.03.16	MAT'L	***	
2	→	7	→	X.X	±0.20					MATERIAL NO.	DRAWING NO.	
1	→	6	→	X.XX	±0.10	LECLION ELECTRONIC & HARDWARE CO., LTD.				WH001-10BR01N3-L22-A	WIF119005	A
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1'							

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rocker Switches](#) category:

Click to view products by [Legion](#) manufacturer:

Other Similar products are found below :

[LTILA6E-1S-WH-RC-FN12VXCR1](#) [6-1571986-9](#) [8007K26N324V52](#) [8055K23Z7V](#) [8055K32Z7V](#) [8055K52Z7V](#) [8138K20E6M50](#)
[PREDD4-07F-BB0FW](#) [PREDD5-07F-BB0GW](#) [999-16716-002](#) [A101J1V3Q004](#) [A103J1ZQ004](#) [A201J1AQ004](#) [A201J50ZQ004](#)
[H8653VBBG2577W](#) [HB130CHNWWNAAC](#) [R13112ABB-602W](#) [1251.0303](#) [1352.0107](#) [1500G51E](#) [1571099-3](#) [1571987-4](#) [1571987-5](#)
[1571988-5](#) [B123J77V7B2](#) [160212E](#) [1634200-7](#) [1801.1164](#) [PANEL-PLUG-VHP-BLACK](#) [PANEL-PLUG-VHP-WT](#) [K2ABAAAAAA](#)
[250011E714](#) [2600R21E](#) [260413E](#) [2639LH/2A7/127000L0](#) [LL3AZXX-100-XGT1](#) [LL3AZXX-100-XHS1](#) [LL3AZXX-100-XSD1](#) [30-695B](#)
[160311E](#) [A103J3ZQ004](#) [A201J61ZQ0004](#) [1852.1102](#) [1890.1104](#) [191.081.011](#) [AE107J1AQ004](#) [1935.3128](#) [1935.3133](#) [1MR7-B](#)
[SY236CD6U622](#)