



DO-218AB



FEATURES

- Junction passivation optimized design passivated anisotropic rectifier technology
- $T_J = 175^\circ\text{C}$ capability suitable for high reliability and automotive requirement.
- Available in bi-directional polarity
- Low leakage current
- Low forward voltage drop
- High surge capability
- Meets ISO16750-2 surge specification(varied by test condition)
- Meets MSL-1, per J-STD-020, LF maximum peak of 245°C .
- AEC-Q101 qualified.
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

| PRIMARY CHARACTERISTICS | |
|-------------------------------------|---------------------|
| V_R | 12V to 36V |
| P_{PPM} (10/1000 μs) | 6600W |
| P_{PPM} (10/10000 μs) | 5200W |
| P_D | 8W |
| T_{Jmax} | 175°C |
| Polarity | Bi-directional |
| Package | DO-218AB |

MECHANICAL DATA

Case: DO-218AB

Molding compound meets UL 94V-0 flammability rating

Base P/NHE3-RoHS-compliant, AEC-Q101 qualified

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

| MAXIMUM RATINGS($T_C=25^\circ\text{C}$, RH=45%-75%, unless otherwise noted) | | | |
|---|-----------------|----------------|--------------------|
| Parameter | Symbol | Value | Unit |
| Peak pulse power dissipation on 10/1000 μs waveform | P_{PPM} | 6600 | Watts |
| Peak pulse power dissipation on 10/10000 μs waveform | | 5200 | Watts |
| Power dissipation on infinite heat sink at $T_C=25^\circ\text{C}$ | P_D | 8.0 | Watts |
| Peak pulse current with 10/1000 μs waveform | $I_{PPM}^{(1)}$ | See next table | Amps |
| Operating junction and storage temperature range | T_J, T_{STG} | -55 to +175 | $^\circ\text{C}$ |
| Typical thermal resistance, junction to case | $R_{\theta JC}$ | 0.9 | $^\circ\text{C/W}$ |

Note

(1) Non-repetitive current pulse derated above $T_A=25^\circ\text{C}$

| ELECTRICAL CHARACTERISTICS | | | | | | | | |
|----------------------------|-------|-------|--------------------|---------------------|---------------|---------|---------------|----------|
| Part Number | V_R | I_T | $I_R@V_R$ | | $V_{BR} @I_T$ | | $V_C @I_{PP}$ | I_{PP} |
| Bi-polar | V | mA | $\mu A@25^\circ C$ | $\mu A@175^\circ C$ | min(V) | max (V) | V | A |
| SM8S12CA | 12.0 | 5 | 5 | 150 | 13.3 | 14.7 | 19.9 | 332 |
| SM8S13CA | 13.0 | 5 | 5 | 150 | 14.4 | 15.9 | 21.5 | 307 |
| SM8S14CA | 14.0 | 5 | 5 | 150 | 15.6 | 17.2 | 23.2 | 284 |
| SM8S15CA | 15.0 | 5 | 5 | 150 | 16.7 | 18.5 | 24.4 | 270 |
| SM8S16CA | 16.0 | 5 | 5 | 150 | 17.8 | 19.7 | 26.0 | 253 |
| SM8S17CA | 17.0 | 5 | 5 | 150 | 18.9 | 20.9 | 27.6 | 239 |
| SM8S18CA | 18.0 | 5 | 5 | 150 | 20.0 | 22.1 | 29.2 | 226 |
| SM8S20CA | 20.0 | 5 | 5 | 150 | 22.2 | 24.5 | 32.4 | 204 |
| SM8S22CA | 22.0 | 5 | 5 | 150 | 24.4 | 26.9 | 35.5 | 186 |
| SM8S24CA | 24.0 | 5 | 5 | 150 | 26.7 | 29.5 | 38.9 | 170 |
| SM8S26CA | 26.0 | 5 | 5 | 150 | 28.9 | 31.9 | 42.1 | 157 |
| SM8S28CA | 28.0 | 5 | 5 | 150 | 31.1 | 34.4 | 45.4 | 145 |
| SM8S30CA | 30.0 | 5 | 5 | 150 | 33.3 | 36.8 | 48.4 | 136 |
| SM8S33CA | 33.0 | 5 | 5 | 150 | 36.7 | 40.6 | 53.3 | 124 |
| SM8S36CA | 36.0 | 5 | 5 | 150 | 40.0 | 44.2 | 58.1 | 114 |

Note:

①.Surge waveform: 10/1000 μ s

V_R : Stand-off voltage -- Maximum voltage that can be applied


V_{BR} : Breakdown voltage

V_C : Clamping voltage -- Peak voltage measured across the suppressor at a specified I_{PP}

I_R : Reverse leakage current

I_T : Test current

ORDERING INFORMATION

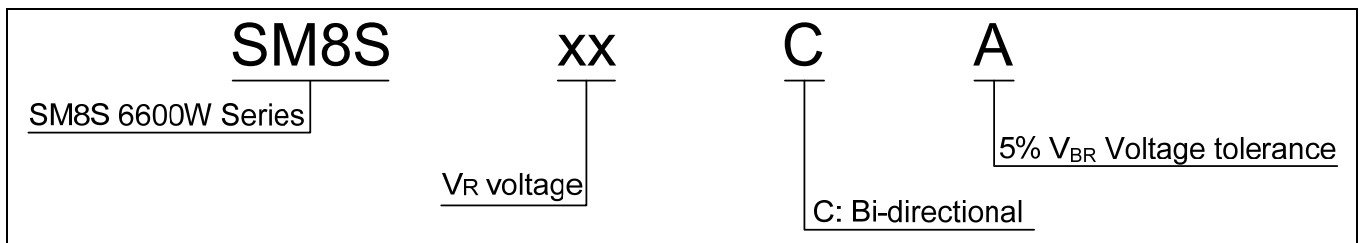

RATINGS AND CHARACTERISTICS CURVES ($T_A=25^\circ\text{C}$, unless otherwise noted)

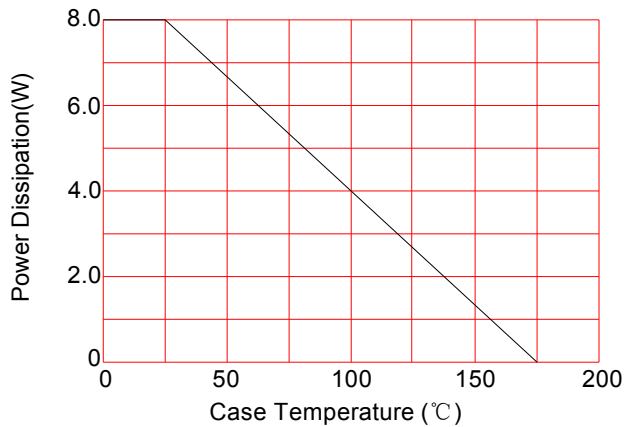


FIG.1: Power Derating Curve

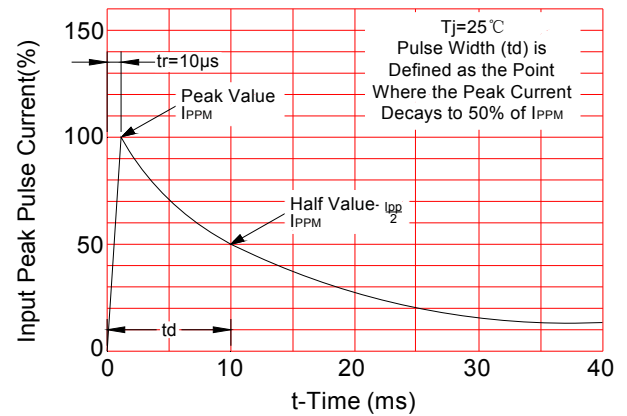


FIG.2: Pulse Waveform

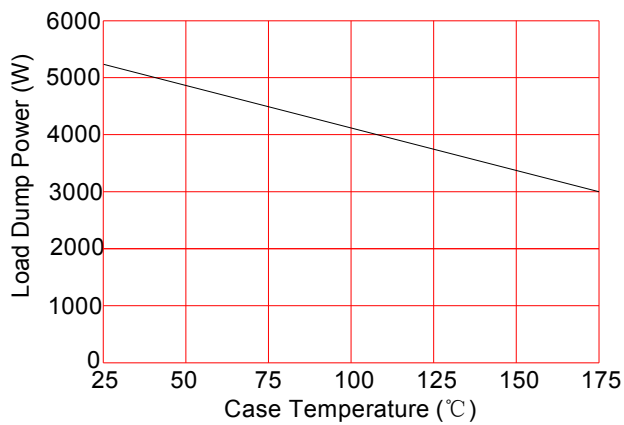


FIG.3: Load Dump Power Characteristics (10ms Exponential Wavaform)


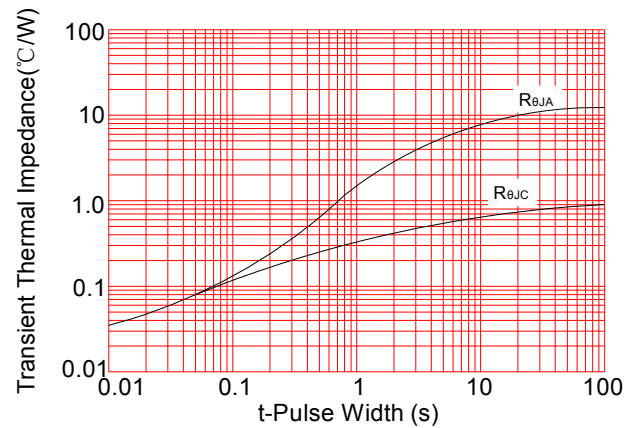



FIG.4: Typical Transient Thermal Impedance

SOLDERING PARAMETERS

| | | |
|--|-----------------------------------|---------------------------------|
| Reflow Condition | | Pb-Free assembly (see FIG.5) |
| Pre Heat | -Temperature Min ($T_{s(min)}$) | +150°C |
| | -Temperature Max($T_{s(max)}$) | +200°C |
| | -Time (Min to Max) (t_s) | 60-180 secs. |
| Average ramp up rate (Liquidus Temp (T_L) to peak) | | 3°C/sec. Max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3°C/sec. Max |
| Reflow | -Temperature(T_L)(Liquidus) | +217°C |
| | -Temperature(t_L) | 60-150 secs. |
| Peak Temp (T_p) | | +260(+0/-5)°C |
| Time within 5°C of actual Peak Temp (t_p) | | 20-40secs. |
| Ramp-down Rate | | 6°C/sec. Max |
| Time 25°C to Peak Temp (T_p) | | 8 min. Max |
| Do not exceed | | +260°C |

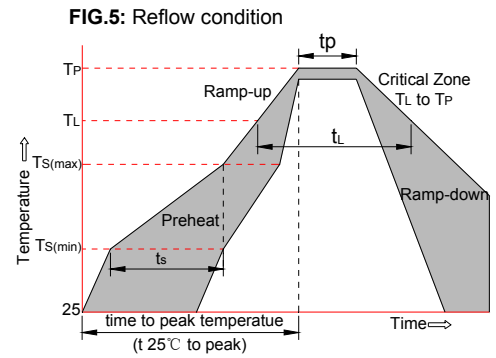


PACKAGE MECHANICAL DATA

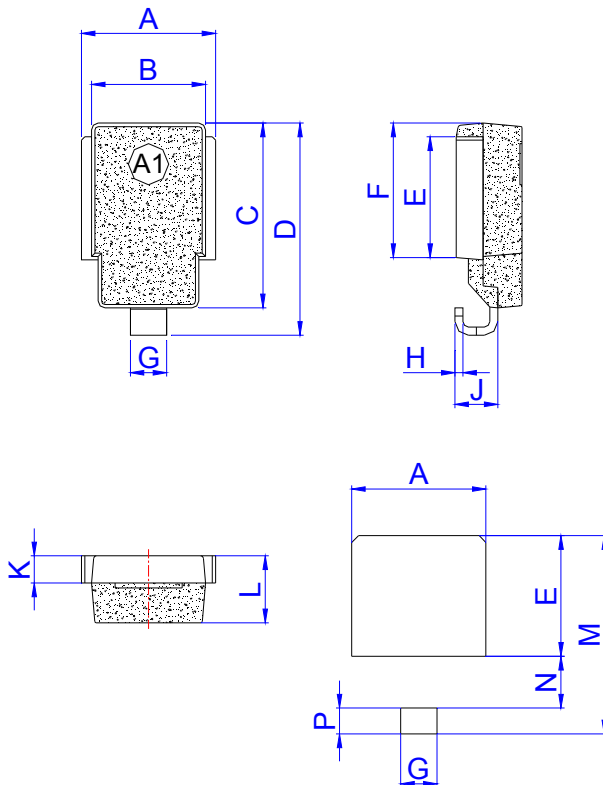

| Ref. | Dimensions | | | |
|------|-------------|------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 9.5 | 10.5 | 0.374 | 0.413 |
| B | 8.3 | 8.7 | 0.327 | 0.342 |
| C | 13.3 | 13.7 | 0.524 | 0.539 |
| D | 15.0 | 16.0 | 0.592 | 0.628 |
| E | 8.5 | 9.1 | 0.335 | 0.358 |
| F | 9.5 | 10.1 | 0.374 | 0.398 |
| G | 2.4 | 3.0 | 0.094 | 0.118 |
| H | 0.5 | 0.7 | 0.020 | 0.028 |
| J | 2.7 | 3.7 | 0.106 | 0.146 |
| K | 1.9 | 2.1 | 0.075 | 0.083 |
| L | 4.7 | 5.1 | 0.185 | 0.201 |
| M | 14.2 | 14.8 | 0.559 | 0.583 |
| N | 3.5 | 4.1 | 0.138 | 0.161 |
| P | 1.6 | 2.2 | 0.063 | 0.087 |

TAPE AND REEL SPECIFICATION-DO-218AB

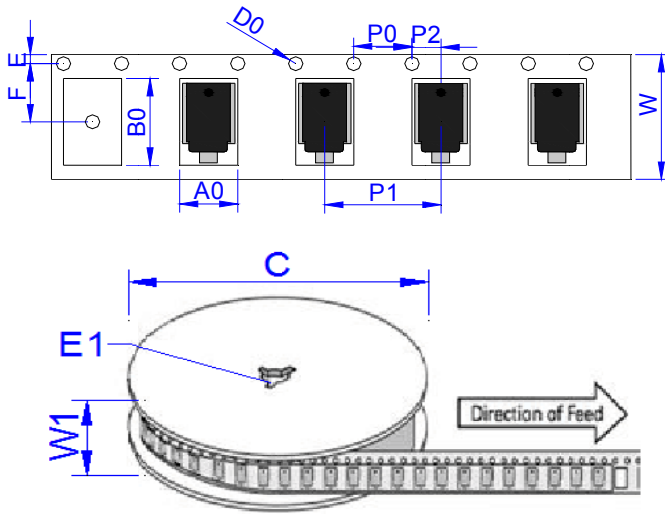

| Ref. | Dimensions | |
|------|-------------|---------------|
| | Millimeters | Inches |
| A0 | 10.80 ± 0.3 | 0.425 ± 0.012 |
| B0 | 16.13 ± 0.3 | 0.635 ± 0.012 |
| C | 330.0 ± 0.3 | 13.0 ± 0.012 |
| D0 | 1.55 ± 0.2 | 0.061 ± 0.008 |
| D1 | 1.55 ± 0.2 | 0.061 ± 0.008 |
| E | 1.75 ± 0.2 | 0.069 ± 0.008 |
| E1 | 13.30 ± 0.2 | 0.524 ± 0.008 |
| F | 11.50 ± 0.2 | 0.453 ± 0.008 |
| P0 | 4.00 ± 0.2 | 0.157 ± 0.008 |
| P1 | 16.00 ± 0.2 | 0.630 ± 0.008 |
| P2 | 2.00 ± 0.2 | 0.079 ± 0.008 |
| W | 24.00 ± 0.2 | 0.945 ± 0.008 |
| W1 | 25.85 ± 0.2 | 1.018 ± 0.008 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Leiditech](#) manufacturer:

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP280A](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#)
[MPLAD30KP24A](#) [MPLAD30KP30CAE3](#) [ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [JANTX1N6144A](#)
[JANTX1N6057A](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-TP](#) [MMAD1108E3/TR13](#) [JANTX1N6160A](#)
[D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA BK](#) [CPDQC3V3C-HF](#)
[CPDQC12VE-HF](#) [GRPADATAJANTX1N6041A](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D26V0H1U2LP16-7](#)