

HBW Series

Features

- 125°C, 4,000 hours assured
- Low ESR and High ripple current
- RoHS Compliance




Marking color: Dark Green

Specifications

Items	Performance										
Category Temperature Range	-55°C ~ +125°C										
Capacitance Tolerance	±20% (at 120Hz, 20°C)										
Leakage Current (at 20°C)*	$I = 0.01CV$ or $3 (\mu A)$ whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V										
Tan δ (at 120Hz, 20°C)	See Standard Ratings										
Endurance	<table border="1"> <tr> <td>Test Time</td> <td>4,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Test Time	4,000 Hrs	Capacitance Change	Within ±30% of initial value	Tan δ	Less than 200% of specified value	ESR	Less than 200% of specified value	Leakage Current	Within specified value
	Test Time	4,000 Hrs									
	Capacitance Change	Within ±30% of initial value									
	Tan δ	Less than 200% of specified value									
	ESR	Less than 200% of specified value									
Leakage Current	Within specified value										
* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 4,000 hours at 125°C.											
Shelf Life Test	* After storage for 1,000 hours at $125 \pm 2^\circ C$ with no voltage applied and then being stabilized at 20°C, capacitors shall meet the limits specified in Endurance. (With voltage treatment)										
Resistance to Soldering Heat * (Please refer to page 23 for reflowsoldering conditions)	<table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Within specified value</td> </tr> <tr> <td>ESR</td> <td>Within specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Capacitance Change	Within ±10% of initial value	Tan δ	Within specified value	ESR	Within specified value	Leakage Current	Within specified value		
	Capacitance Change	Within ±10% of initial value									
	Tan δ	Within specified value									
	ESR	Within specified value									
Leakage Current	Within specified value										
* After storage for 1,000 hours at 125 ± 2°C with no voltage applied and then being stabilized at 20°C, capacitors shall meet the limits specified in Endurance. (With voltage treatment)											
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <th>Frequency (Hz)</th> <th>$120 \leq f < 1k$</th> <th>$1k \leq f < 10k$</th> <th>$10k \leq f < 100k$</th> <th>$100k \leq f < 500k$</th> </tr> <tr> <td>Multiplier</td> <td>0.10</td> <td>0.3</td> <td>0.6</td> <td>1.0</td> </tr> </table>	Frequency (Hz)	$120 \leq f < 1k$	$1k \leq f < 10k$	$10k \leq f < 100k$	$100k \leq f < 500k$	Multiplier	0.10	0.3	0.6	1.0
	Frequency (Hz)	$120 \leq f < 1k$	$1k \leq f < 10k$	$10k \leq f < 100k$	$100k \leq f < 500k$						
Multiplier	0.10	0.3	0.6	1.0							
* For any doubt about measured values, measure the leakage current again after the following voltage treatment. Voltage treatment: Applying DC rated voltage to the capacitors for 2 hours at 105 °C.											

Diagram of Dimensions

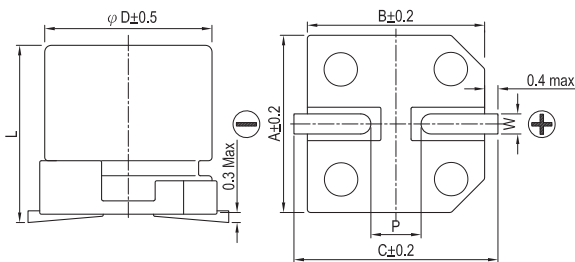

Lead Spacing and Diameter



Unit: mm

ϕD	L	A	B	C	W	$P \pm 0.2$
6.3	5.8 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
8	10.0 ± 0.5	8.4	8.4	9.0	0.7 ~ 1.1	3.1
8	12.0 ± 0.5	8.4	8.4	9.0	0.7 ~ 1.1	3.1
10	10.0 ± 0.5	10.4	10.4	11.0	0.7 ~ 1.3	4.7
10	12.5 ± 0.5	10.4	10.4	11.0	0.7 ~ 1.3	4.7

Marking

$\phi D = 6.3$ mm

$\phi D = 8 \sim 10$ mm

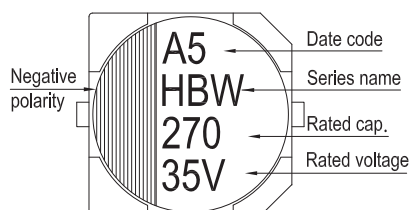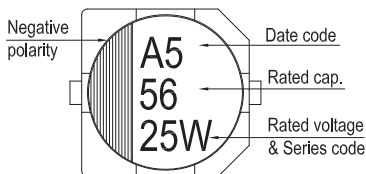

Dimension: ϕ D×L(mm)
Ripple Current: mA/rms at 100k Hz, 125°C

Standard Ratings

W. V. (V)	Surge Voltage (V)	Capacitance (μF)	Size ϕ D×L(mm)	Tanδ (120Hz, 20°C)	L C (μA)	E S R (mΩ/at 100kHz, 20°C Max)	Rated R. C. (mA/rms at 100k Hz, 125°C)
16V (1C)	18.4	82	6.3 × 5.8	0.16	13.1	50	900
		150	6.3 × 7.7	0.16	24	30	1,400
		270	8 × 10	0.16	43.2	27	1,600
		470	10 × 10	0.16	75.2	20	2,000
25V (1E)	28.8	56	6.3 × 5.8	0.14	14	50	900
		100	6.3 × 7.7	0.14	25	30	1,400
		220	8 × 10	0.14	55	27	1,600
		330	10 × 10	0.14	82.5	20	2,000
35V (1V)	40.3	27	6.3 × 5.8	0.12	9.5	60	900
		68	6.3 × 7.7	0.12	23.8	35	1,400
		150	8 × 10	0.12	52.5	27	1,600
		270	10 × 10	0.12	82.5	20	2,000
50V(1H)	57.5	22	6.3 × 5.8	0.10	11	80	750
		33	6.3 × 7.7	0.10	16.5	40	1,100
		68	8 × 10	0.10	34	30	1,250
		100	10 × 10	0.10	50	28	1,600
63V(1J)	72.5	10	6.3 × 5.8	0.08	6.3	120	700
		22	6.3 × 7.7	0.08	13.9	80	900
		27	8 × 10	0.08	17	40	1,100
		33	8 × 10	0.08	20.8	40	1,100
		56	10 × 10	0.08	35.3	30	1,400
		56	10 × 12.5	0.08	35.3	26	1,500

Hybrid

Part Numbering System

HBW series	220μF	±20%	25V	Carrier Tape	8 ϕ × 10L	Pb-free and PET coating case
HBW	221	M	1E	TR	-	0810
Series name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size
						Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 13.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Organic Polymer Capacitors](#) category:

Click to view products by [Lelon](#) manufacturer:

Other Similar products are found below :

[D38999/20WJ43SN-LC](#) [750-1809](#) [MS27467T25F24P](#) [MS27467T25F29P](#) [SEAU0A0102G](#) [MS3470W8-33P L/C](#) [MAL218497801E3](#)
[MAL218297003E3](#) [MAL218497803E3](#) [MAL218397603E3](#) [MAL218497701E3](#) [MAL218497804E3](#) [MAL218697005E3](#) [MAL218397604E3](#)
[MAL218697106E3](#) [MAL218297103E3](#) [MAL218397104E3](#) [MAL218297604E3](#) [MAL218697601E3](#) [MAL218697554E3](#) [MAL218697607E3](#)
[MAL218397702E3](#) [MAL218297702E3](#) [MAL218497901E3](#) [MAL218497806E3](#) [MAL218697001E3](#) [MPP683J6130510LC](#)
[PCZ1V181MCL1GS](#) [PCZ1V221MCL1GS](#) [PCZ1E331MCL1GS](#) [40HVH120M](#) [GYA1C151MCQ1GS](#) [GYA1C271MCQ1GS](#)
[GYA1C471MCQ1GS](#) [GYA1C820MCQ1GS](#) [BC6R3M471LC6.3*8L-1A4T](#) [8221LEM0809H2RR000](#) [ULR277M1CF1ARR](#)
[8221LFM1013H2RR000](#) [160ARUP471M06A1E10T](#) [6R3AREP271M05X7E15P26](#) [250ARHA102M10A6T](#) [SPZ1VM221F11O00RAXXX](#)
[SPZ1EM471E14O00RAXXX](#) [SPZ1JM470E09O00RAXXX](#) [SPZ1HM331G15O00RAXXX](#) [SPZ1AM122G12O00RAXXX](#)
[SPZ1AM152G12O00RAXXX](#) [SPZ1VM681G16O00RAXXX](#) [SPZ1HM220E07O00RAXXX](#)