
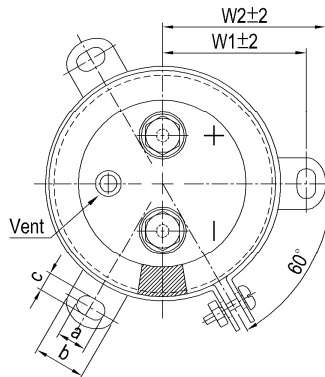


CUSTOMER :
CUSTOMER P/N:

PRODUCT DIMENSIONS

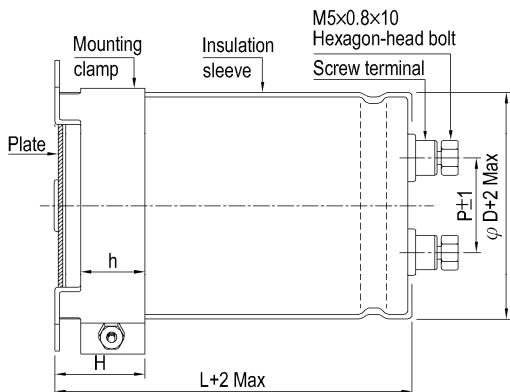

Unit: mm	
ϕ D	63.5
L	105
P	28.6
W1	38.1
W2	42.6
H±1	30
h±1	24
a±0.5	7
b±0.5	14.0
c±0.5	4.5

Items	Performance															
Rated Voltage V_R	400 V															
Capacitance C_R	3300 μ F (120 Hz, 20°C)															
Category Temperature Range	-25°C ~ +85°C															
Capacitance Tolerance	-20 % ~ +20 % (120 Hz, 20°C)															
Surge Voltage V_S	440 VDC															
Leakage Current (20°C)	$I_{LEAK} \leq 3447 \mu$ A After 5 minutes															
Tan δ	≤ 0.15 (120 Hz, 20°C)															
Ripple Current ($I_{AC, R}$ / rms)	7.9 A (120 Hz, 85°C)															
Low Temperature Characteristics at 120 Hz	<table border="1"> <tr> <td>Rated Voltage</td> <td>400</td> </tr> <tr> <td>Capacitance change $C_{(-25^\circ C)} / C_{(+20^\circ C)}$</td> <td>$\geq 0.7$</td> </tr> </table>	Rated Voltage	400	Capacitance change $C_{(-25^\circ C)} / C_{(+20^\circ C)}$	≥ 0.7											
Rated Voltage	400															
Capacitance change $C_{(-25^\circ C)} / C_{(+20^\circ C)}$	≥ 0.7															
Ripple Current (A) and Frequency Multipliers	<table border="1"> <tr> <td>Frequency (Hz)</td> <td>50 / 60</td> <td>100 / 120</td> <td>300</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>Multipliers</td> <td>0.7</td> <td>1.0</td> <td>1.1</td> <td>1.3</td> <td>1.4</td> </tr> </table>	Frequency (Hz)	50 / 60	100 / 120	300	1k	10k up	Multipliers	0.7	1.0	1.1	1.3	1.4			
Frequency (Hz)	50 / 60	100 / 120	300	1k	10k up											
Multipliers	0.7	1.0	1.1	1.3	1.4											
Ripple Current (A) and Temperature Multipliers	<table border="1"> <tr> <td>Temperature (°C)</td> <td>40</td> <td>60</td> <td>70</td> <td>85</td> </tr> <tr> <td>Multipliers</td> <td>2.7</td> <td>2.0</td> <td>1.7</td> <td>1.0</td> </tr> </table>	Temperature (°C)	40	60	70	85	Multipliers	2.7	2.0	1.7	1.0					
Temperature (°C)	40	60	70	85												
Multipliers	2.7	2.0	1.7	1.0												
Endurance and Shelf Life Test	<table border="1"> <thead> <tr> <th>Items</th> <th>Endurance</th> <th>Shelf Life Test</th> </tr> </thead> <tbody> <tr> <td>Test Time</td> <td>2,000 Hrs at 85°C, $V_R, I_{AC, R}$</td> <td>500 Hrs at 85°C</td> </tr> <tr> <td>Cap. Change</td> <td>Within ± 15 % of initial value</td> <td>Within ± 20 % of initial value</td> </tr> <tr> <td>Tan δ</td> <td>Less than 175% of specified value</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> <td>Within specified value</td> </tr> </tbody> </table> <p>Shelf Life Test: The rated voltage shall be applied to the capacitors before the measurements (Refer to JIS C 5101-4 4.1)</p>	Items	Endurance	Shelf Life Test	Test Time	2,000 Hrs at 85°C, $V_R, I_{AC, R}$	500 Hrs at 85°C	Cap. Change	Within ± 15 % of initial value	Within ± 20 % of initial value	Tan δ	Less than 175% of specified value	Less than 200% of specified value	Leakage Current	Within specified value	Within specified value
Items	Endurance	Shelf Life Test														
Test Time	2,000 Hrs at 85°C, $V_R, I_{AC, R}$	500 Hrs at 85°C														
Cap. Change	Within ± 15 % of initial value	Within ± 20 % of initial value														
Tan δ	Less than 175% of specified value	Less than 200% of specified value														
Leakage Current	Within specified value	Within specified value														
Mounting capacitor	Do not mount the capacitor with terminals (safety vent) upside down															
Standards	JIS C 5101-4, IEC 60384-4															
Remarks	RoHS Compliance															

* Please refer to "Precautions and Guidelines for Aluminum Electrolytic Capacitors" section in Lelon's catalog for further details.

Publication Date	November 15, 2018	Approval Signatures:	Approved	Checked	Designed
Revision Date					
Version No.	1				

Please return one copy with your approval

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Lelon](#) manufacturer:

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)
[B41022A5686M6](#) [ESRG250ELL101MH09D](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#)
[EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#) [EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#)
[ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#) [EGXF500ELL561ML15S](#) [EKMG350ETD471MJ16S](#) [35YXA330MEFC10X12.5](#)
[RXW471M1ESA-0815](#) [ELXZ630ELL221MJ25S](#) [ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#)
[LKMD1401H221MF](#) [B41888G6108M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKMG500ETD221MJC5S](#) [LKMK2502W101MF](#)
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)