

OVK Series

Features

- 105°C, 5,000 hours assured
- Ultra low ESR, solid capacitors of SMD type
- RoHS Compliance




Marking color: Blue

Specifications

Items	Performance										
Category Temperature Range	-55°C ~ +105°C										
Capacitance Tolerance	±20% (at 120 Hz, 20°C)										
Leakage Current (at 20°C)*	Rated voltage applied, after 2 minutes at 20°C. See Standard Ratings										
Tanδ (at 120 Hz, 20°C)	See Standard Ratings										
ESR (at 100k ~ 300k Hz, 20°C)	See Standard Ratings										
Endurance	<table border="1"> <tr> <td>Test Time</td> <td>5,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Test Time	5,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 150% of specified value	ESR	Less than 150% of specified value	Leakage Current	Within specified value
	Test Time	5,000 Hrs									
	Capacitance Change	Within ±20% of initial value									
	Tanδ	Less than 150% of specified value									
	ESR	Less than 150% of specified value									
Leakage Current	Within specified value										
* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 5,000 hours at 105°C.											
Moisture Resistance	<table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Test Time	1,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 150% of specified value	ESR	Less than 150% of specified value	Leakage Current	Within specified value
	Test Time	1,000 Hrs									
	Capacitance Change	Within ±20% of initial value									
	Tanδ	Less than 150% of specified value									
	ESR	Less than 150% of specified value									
Leakage Current	Within specified value										
* The above specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them at 60°C, 90 ~ 95% RH for 1,000 hours. Leakage current should be tested after voltage treatment*.											
Resistance to Soldering Heat * (Please refer to page 26 for reflow soldering conditions)	<table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Within specified value</td> </tr> <tr> <td>ESR</td> <td>Within specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Capacitance Change	Within ±10% of initial value	Tanδ	Within specified value	ESR	Within specified value	Leakage Current	Within specified value		
	Capacitance Change	Within ±10% of initial value									
	Tanδ	Within specified value									
	ESR	Within specified value									
	Leakage Current	Within specified value									
* For any doubt about measured values, measure the leakage current again after the following voltage treatment. Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105 °C.											
Ripple Current and Frequency Multipliers	<table border="1"> <tr> <th>Frequency (Hz)</th> <th>120 ≤ f < 1k</th> <th>1k ≤ f < 10k</th> <th>10k ≤ f < 100k</th> <th>100k ≤ f < 500k</th> </tr> <tr> <td>Multiplier</td> <td>0.05</td> <td>0.3</td> <td>0.7</td> <td>1.0</td> </tr> </table>	Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k	Multiplier	0.05	0.3	0.7	1.0
	Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k						
Multiplier	0.05	0.3	0.7	1.0							

Diagram of Dimensions

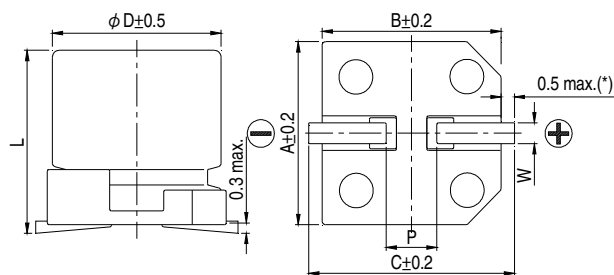

Lead Spacing and Diameter

Unit: mm



φD	L	A	B	C	W	P ± 0.2
5	5.7 ± 0.3	5.3	5.3	5.9	0.5 ~ 0.8	1.5
6.3	4.4 ± 0.2	6.6	6.6	7.2	0.5 ~ 0.8	2.0
6.3	5.9 +0.1/-0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
6.3	9.5 ± 0.5	6.6	6.6	7.2	0.5 ~ 0.8	2.0
8	6.7 ± 0.3	8.3	8.3	9.0	0.7 ~ 1.1	3.1
8	12.0 ± 0.5	8.3	8.3	9.0	0.7 ~ 1.1	3.1
10	7.7 ± 0.3	10.3	10.3	11.0	0.7 ~ 1.3	4.7
10	9.9 +0.1/-0.3	10.3	10.3	11.0	0.7 ~ 1.3	4.7
10	12.6 +0.1/-0.4	10.3	10.3	11.0	0.7 ~ 1.3	4.7

(*): For 5 ~ 6.3 φ is 0.4 max.

Marking

φD = 5 ~ 6.3

φD = 8 ~ 10





Dimension: ϕ D×L(mm)
Ripple Current: mA/rms at 100k Hz, 105°C

Standard Ratings

Rated Volt. (V)	Surge Voltage (V)	Capacitance (μF)	Size ϕ D×L(mm)	Tanδ (120 Hz, 20°C)	L C (μA)	E S R (mΩ/at 100k ~ 300k Hz, 20°C max.)	Rated R. C. (mA/rms at 100k Hz, 105°C)		
2.5V (0E)	2.9	120	6.3 × 4.4	0.12	120	40	1,670		
		220	6.3 × 5.9		110	25	2,500		
		560	8 × 6.7		280	23	3,100		
				680	8 × 12	0.18	340	12	4,770
				1,000	10 × 7.7	0.12	500	19	4,240
				1,200	10 × 9.9	0.18	750	13	5,200
				1,500	10 × 12.6	0.18	750	10	5,500
4V (0G)	4.6	68	5 × 5.7	0.12	300	30	1,970		
		100	6.3 × 4.4		160	40	1,670		
		150	5 × 5.7		120	25	2,200		
			6.3 × 5.9		120	22	2,570		
		220	8 × 6.7		176	25	3,020		
		270	8 × 6.7		216	22	3,220		
		330	6.3 × 5.9		264	20	2,800		
			8 × 6.7		264	22	3,220		
		390	6.3 × 7.7		312	14	3,470		
		470	10 × 7.7		375	20	4,130		
		560	8 × 6.7		448	18	3,600		
			8 × 12	448	12	4,770			
		680	10 × 7.7	544	20	4,130			
		820	10 × 9.9	656	13	5,200			
		1,200	10 × 12.6	960	10	5,500			
6.3V (0J)	7.2	47	5 × 5.7	0.12	300	30	1,970		
		82	6.3 × 4.4		207	40	1,670		
			6.3 × 5.9		103	27	2,400		
		100	5 × 5.7		126	35	1,380		
			6.3 × 5.9		126	22	2,800		
		120	6.3 × 5.9		151	22	2,800		
		150	8 × 6.7		189	25	3,020		
		220	6.3 × 5.9		277	20	2,800		
			8 × 6.7		277	22	3,220		
		270	6.3 × 7.7		340	14	3,470		
		330	6.3 × 7.7		416	14	3,470		
			10 × 7.7	416	20	4,130			
		390	8 × 6.7	491	22	3,220			
		470	8 × 12	592	12	4,770			
			10 × 7.7	592	20	4,130			
		560	10 × 9.9	706	16	4,700			
		820	10 × 12.6	1,033	10	5,500			
10V (1A)	12.0	33	5 × 5.7	0.12	100	40	1,300		
		56	6.3 × 4.4		224	40	1,670		
			6.3 × 5.9		112	27	2,300		
		68	5 × 5.7		136	30	2,100		
			6.3 × 5.9		136	27	2,300		
		120	6.3 × 5.9		240	27	2,300		
		150	6.3 × 7.7		300	21	2,880		
			8 × 6.7			30	2,760		
			10 × 7.7			30	3,020		



Dimension: ϕ D×L(mm)
Ripple Current: mA/rms at 100k Hz, 105°C

Standard Ratings

Rated Volt. (V)	Surge Voltage (V)	Capacitance (μF)	Size ϕ D×L(mm)	Tanδ (120 Hz, 20°C)	L C (μA)	E S R (mΩ/at 100k ~ 300k Hz, 20°C max.)	Rated R. C. (mA/rms at 100k Hz, 105°C)
10V (1A)	12.0	270	8 × 6.7	0.12	540	22	3,200
		330	8 × 12		660	14	4,420
			10 × 7.7	660	24	3,770	
		470	10 × 9.9	0.12	940	18	4,400
560	10 × 12.6	1,120	12		5,300		
16V (1C)	18.0	22	5 × 5.7	0.12	100	45	1,100
		33	6.3 × 4.4		211	40	1,670
		39	5 × 5.7		125	35	2,000
			68		6.3 × 5.9	125	30
		218					
		82	6.3 × 7.7		262	24	2,700
			8 × 6.7			28	2,800
		100	6.3 × 5.9		320	30	2,200
			6.3 × 7.7			24	2,700
		10 × 7.7	35		2,670		
		120	8 × 6.7		384	28	2,800
		180	10 × 7.7		576	29	3,430
		270	6.3 × 9.5		864	11	5,000
		330	10 × 12.6		1,056	12	5,300
1,504	5,300						
2,624	5,400						
3,200	5,400						
20V (1D)	23.0	15	6.3 × 4.4	0.12	120	45	2,000
		22	6.3 × 4.4		88	35	2,000
		22	6.3 × 5.9		88	48	1,300
		47	8 × 6.7		188	45	1,890
		56	6.3 × 5.9		224	48	1,300
					272		
		82	328		400	480	
		100	400		480		
		120	480		1,080	21	4,000
		270	8 × 12		1,560	14	4,950
390	8 × 12	1,880	20	4,300			
470	10 × 12.6	1,880	20	4,300			
25V (1E)	29.0	10	8 × 6.7	0.10	125	60	1,500
		47	6.3 × 5.9	0.12	235	49	1,300
		150	8 × 12		750	28	2,200
		270	10 × 12.6	1,350	27	2,700	
35V (1V)	40.0	18	6.3 × 5.9	0.12	126	64	900
		82	8 × 12		574	29	2,200
		150	10 × 12.6		1,050	28	2,600

Note: The surface temperature of aluminum case top must not exceed 105°C. A rise in temperature due to self-heating by ripple current should be factored in.

Part Numbering System

OVK Series 470μF ±20% 6.3V Carrier Tape 10 ϕ × 7.7L Pb-free and PET coating case

OVK **471** **M** **OJ** **TR** - **1008**

Series Name Capacitance Capacitance Tolerance Rated Voltage Package Type Terminal Type Case size Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 15.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Organic Polymer Capacitors](#) category:

Click to view products by [Lelon](#) manufacturer:

Other Similar products are found below :

[D38999/20WJ43SN-LC](#) [750-1809](#) [MS27467T25F24P](#) [MS27467T25F29P](#) [SEAU0A0102G](#) [MS3470W8-33P L/C](#) [MAL218497801E3](#)
[MAL218297003E3](#) [MAL218497803E3](#) [MAL218397603E3](#) [MAL218497701E3](#) [MAL218497804E3](#) [MAL218697005E3](#) [MAL218397604E3](#)
[MAL218697106E3](#) [MAL218297103E3](#) [MAL218397104E3](#) [MAL218297604E3](#) [MAL218697601E3](#) [MAL218697554E3](#) [MAL218697607E3](#)
[MAL218397702E3](#) [MAL218297702E3](#) [MAL218497901E3](#) [MAL218497806E3](#) [MAL218697001E3](#) [MPP683J6130510LC](#)
[PCZ1V181MCL1GS](#) [PCZ1V221MCL1GS](#) [PCZ1E331MCL1GS](#) [40HVH120M](#) [GYA1C151MCQ1GS](#) [GYA1C271MCQ1GS](#)
[GYA1C471MCQ1GS](#) [GYA1C820MCQ1GS](#) [BC6R3M471LC6.3*8L-1A4T](#) [8221LEM0809H2RR000](#) [ULR277M1CF1ARR](#)
[8221LFM1013H2RR000](#) [160ARUP471M06A1E10T](#) [6R3AREP271M05X7E15P26](#) [250ARHA102M10A6T](#) [SPZ1VM221F11O00RAXXX](#)
[SPZ1EM471E14O00RAXXX](#) [SPZ1JM470E09O00RAXXX](#) [SPZ1HM331G15O00RAXXX](#) [SPZ1AM122G12O00RAXXX](#)
[SPZ1AM152G12O00RAXXX](#) [SPZ1VM681G16O00RAXXX](#) [SPZ1HM220E07O00RAXXX](#)