



# Aluminum Electrolytic Capacitors

RXQ

## Features

- 105°C, 8,000 ~ 10,000 hours assured
- Suitable for switching power supplies, UPS, Ballast
- Smaller case size current
- RoHS Compliance



Sleeve & Marking Color: Black & Golden

## SPECIFICATIONS


Items	Performance																										
Category Temperature Range	160 ~ 400V			450V																							
	-40°C ~ +105°C			-25°C ~ +105°C																							
Capacitance Tolerance	±20%						(at 120Hz, 20°C)																				
Leakage Current (at 20°C)	Time		after 5 minutes																								
	Leakage Current		CV ≤ 1,000 I = 0.03CV + 15(µA)		CV > 1,000 I = 0.02CV + 25(µA)																						
Where, C = rated capacitance in µF V = rated DC working voltage in V																											
Dissipation Factor (Tan δ at 120Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>450</td></tr> <tr> <td>Tan δ (max)</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.24</td><td>0.24</td><td>0.24</td></tr> </table>							Rated Voltage	160	200	250	350	400	450	Tan δ (max)	0.20	0.20	0.20	0.24	0.24	0.24						
Rated Voltage	160	200	250	350	400	450																					
Tan δ (max)	0.20	0.20	0.20	0.24	0.24	0.24																					
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.																										
	<table border="1"> <tr> <td>Rated Voltage</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>450</td></tr> <tr> <td>Impedance Ratio</td><td>Z(-25)/Z(+20°C)</td><td>3</td><td>3</td><td>3</td><td>5</td><td>5</td></tr> <tr> <td></td><td>Z(-40)/Z(+20°C)</td><td>6</td><td>6</td><td>6</td><td>6</td><td>-</td></tr> </table>							Rated Voltage	160	200	250	350	400	450	Impedance Ratio	Z(-25)/Z(+20°C)	3	3	3	5	5		Z(-40)/Z(+20°C)	6	6	6	6
Rated Voltage	160	200	250	350	400	450																					
Impedance Ratio	Z(-25)/Z(+20°C)	3	3	3	5	5																					
	Z(-40)/Z(+20°C)	6	6	6	6	-																					
Endurance	Test Time		8,000 Hrs for φD = 10mm; 10,000 Hrs for φD ≥ 12.5mm																								
	Capacitance Change		Within ±20% of initial value																								
		Dissipation Factor		Less than 200% of specified value																							
		Leakage Current		Within specified value																							
* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 8,000 / 10,000 hours at 105°C.																											
Shelf Life Test	Test Time		1,000 Hrs																								
	Capacitance Change		With in ±20% of initial value																								
		Dissipation Factor		Less than 200% of specified value																							
		Leakage Current		Less than 500% of specified value																							
* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors before the measurements (Refer to JIS C 5101-4 4.1).																											
Ripple Current & Frequency Multipliers	Frequency (Hz) Cap. (µF)		120	1k	10k	100k up																					
	6.8 ~ 82		1.00	1.75	2.25	2.50																					
	100 up		1.00	1.67	2.05	2.25																					



# Aluminum Electrolytic Capacitors

RXQ

## DIAGRAM OF DIMENSIONS

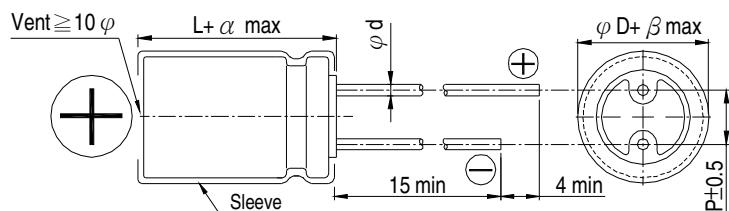

Unit: mm

### LEAD SPACING AND DIAMETER

$\phi D$	10	12.5	16	18
P	5.0		7.5	
$\phi d$	0.6		0.8	
$\alpha$		1.5		
$\beta$		0.5		

Dimension:  $\phi D \times L$ (mm)

Ripple Current: mA/rms at 105°C

## DIMENSION & PERMISSIBLE RIPPLE CURRENT

V.DC μF	160V (2C)				200V (2D)				250V (2E)				350V (2V)				400V (2G)					
	$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		
		120 Hz	100k Hz		120 Hz	100k Hz		120 Hz	100k Hz		120 Hz	100k Hz		120 Hz	100k Hz		120 Hz	100k Hz		120 Hz	100k Hz	
6.8																10×16	110	275	10×16	110	275	
10	10×16	125	313	10×16	125	313	10×20	140	350	10×20	140	350	10×20	140	350	10×20	140	350	10×20	140	350	
22	10×20	200	500	10×20	200	500	10×20	200	500	12.5×20	260	650	12.5×20	260	650	12.5×20	260	650	12.5×20	260	650	
33	10×20	250	625	10×20	260	650	12.5×20	320	800	16×20	360	900	16×20	360	900	16×20	360	900	16×20	360	900	
47	10×20	300	750	12.5×20	390	975	12.5×20	390	975	16×20	430	1,075	16×25	470	1,175	18×20	450	1,125	16×25	470	1,175	
68	12.5×20	470	1,175	12.5×20	470	1,175	16×20	520	1,300	16×25	560	1,400	18×20	550	1,375	18×25	585	1,463	18×25	585	1,463	
82	12.5×20	510	1,275	16×20	550	1,375	16×20	550	1,375	18×25	610	1,525	18×25	610	1,525	18×25	610	1,525	18×25	610	1,525	
100	12.5×25 16×20	620 630	1,395 1,418	16×20	630	1,418	16×25	680	1,530	18×25	700	1,575	18×31.5	765	1,721	18×31.5	765	1,721	18×31.5	765	1,721	
120													18×31.5	830	1,868	18×35.5	865	1,946	18×35.5	865	1,946	
150	16×20	770	1,733	16×25	840	1,890	18×25	860	1,935	18×35.5	960	2,160	18×40	985	2,216	18×40	985	2,216	18×40	985	2,216	
220	16×25	1,020	2,295	18×25	1,050	2,363	18×31.5	1,130	2,543													
330	18×31.5	1,390	3,128	18×35.5	1,430	3,218																

Remark: The case size of 16×20, 18×20 and 18×25 are used flat type rubber bung

V.DC μF	450V (2W)				$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current						
						120 Hz	100k Hz																	
						110	275		180	450		290	725		390	975	380	950	480	1,200				
6.8	10×20	110	275																					
10	12.5×20	180	450																					
22	16×20	290	725																					
33	16×25 18×20	390 380	975 950																					
47	18×25	480	1,200																					
68	18×31.5	630	1,575																					
82	18×35.5	715	1,788																					
100	18×40	800	1,800																					

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:***

***Click to view products by Lelon manufacturer:***

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)