



# Aluminum Electrolytic Capacitors

SJA

## Features

- 105°C, 1,000 ~ 2,000 hours assured
- High temperature Category range, with 7mm height
- RoHS Compliance




Sleeve & Marking Color: Brown & White

## SPECIFICATIONS

Items	Performance																																												
Category Temperature Range	-55°C ~ +105°C																																												
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																												
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V																																												
Dissipation Factor (Tan δ at 120Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>Tan δ (max)</td> <td>0.35</td> <td>0.23</td> <td>0.20</td> <td>0.17</td> <td>0.15</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> </tr> </table>									Rated Voltage	4	6.3	10	16	25	35	50	63	Tan δ (max)	0.35	0.23	0.20	0.17	0.15	0.12	0.10	0.10																		
Rated Voltage	4	6.3	10	16	25	35	50	63																																					
Tan δ (max)	0.35	0.23	0.20	0.17	0.15	0.12	0.10	0.10																																					
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td>Rated Voltage</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td></td> <td>Z(-55°C)/Z(+20°C)</td> <td>12</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> </tr> </table>									Rated Voltage	4	6.3	10	16	25	35	50	63	Impedance Ratio	Z(-25°C)/Z(+20°C)	6	4	3	3	2	2	2		Z(-55°C)/Z(+20°C)	12	10	8	6	4	4	3									
Rated Voltage	4	6.3	10	16	25	35	50	63																																					
Impedance Ratio	Z(-25°C)/Z(+20°C)	6	4	3	3	2	2	2																																					
	Z(-55°C)/Z(+20°C)	12	10	8	6	4	4	3																																					
Endurance	<table border="1"> <tr> <td>Test Time</td> <td colspan="8">2,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td colspan="8">Within ±25% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td colspan="8">Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td colspan="8">Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 105°C.</p>									Test Time	2,000 Hrs								Capacitance Change	Within ±25% of initial value								Dissipation Factor	Less than 200% of specified value								Leakage Current	Within specified value							
Test Time	2,000 Hrs																																												
Capacitance Change	Within ±25% of initial value																																												
Dissipation Factor	Less than 200% of specified value																																												
Leakage Current	Within specified value																																												
Shelf Life Test	Test time: 1,000 hours; other items are the same as those for the Endurance.																																												
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <td>Freq.(Hz)</td> <td>60 (50)</td> <td>120</td> <td>500</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>Cap.(μF)</td> <td>Under 47</td> <td>0.75</td> <td>1.00</td> <td>1.20</td> <td>1.30</td> <td>1.45</td> <td></td> <td></td> </tr> <tr> <td></td> <td>100 to 470</td> <td>0.88</td> <td>1.00</td> <td>1.10</td> <td>1.15</td> <td>1.20</td> <td></td> <td></td> </tr> </table>									Freq.(Hz)	60 (50)	120	500	1k	10k up	Cap.(μF)	Under 47	0.75	1.00	1.20	1.30	1.45				100 to 470	0.88	1.00	1.10	1.15	1.20														
Freq.(Hz)	60 (50)	120	500	1k	10k up																																								
Cap.(μF)	Under 47	0.75	1.00	1.20	1.30	1.45																																							
	100 to 470	0.88	1.00	1.10	1.15	1.20																																							

## DIAGRAM OF DIMENSIONS

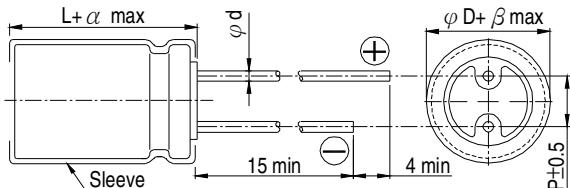

LEAD SPACING AND DIAMETER		Unit: mm
φ D	4	5
P	1.5	2.0
φ d	0.45	0.5
α		1.0
β		0.5

Dimension: φDxL(mm)

Ripple Current: mA/rms at 120 Hz, 105°C

V. DC μF	4V (0G) Contents	4V (0G) φDxL mA	6.3V (0J) φDxL mA	10V (1A) φDxL mA	16V (1C) φDxL mA	25V (1E) φDxL mA	35V (1V) φDxL mA	50V (1H) φDxL mA	63V (1J) φDxL mA
0.1	0R1							4x7	2
0.22	R22							4x7	3
0.33	R33							4x7	4
0.47	R47							4x7	5
1	010							4x7	10
2.2	2R2							4x7	15
3.3	3R3							4x7	18
4.7	4R7						4x7	23	5x7
10	100				4x7	25	4x7	30	6.3x7
22	220		4x7	31	4x7	32	5x7*	39	5x7
33	330	4x7	32	4x7	32	5x7	43	6.3x7	53
47	470	4x7	38	4x7	38	5x7	47	6.3x7	65
100	101	5x7	61	6.3x7	75	6.3x7	80	6.3x7	90
220	221	6.3x7	90	6.3x7	99	8x7	140	8x7	146
330	331	8x7	156	8x7	156	8x7	160	8x7	180
470	471	8x7	180	8x7	180				

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:***

***Click to view products by Lelon manufacturer:***

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)  
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVV5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)  
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)  
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)  
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-](#)  
[6.3X11](#) [VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)  
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)  
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#)