

Features

- 3 ~ 18 ϕ , 85°C, 2,000 hours assured
- Chip type large capacitance capacitors
- Designed for surface mounting on high density PC board
- RoHS Compliance



Marking color: Black

SPECIFICATIONS

| Items | Performance | | | | | | | | | | | | | |
|---|---|----------------------|---|---|------|--------|---|------|------|--------------------------|------|-----------|-----------|---|
| Category Temperature Range | -40°C ~ +85°C | | | | | | | | | | | | | |
| Capacitance Tolerance | ±20% (at 120Hz, 20°C) | | | | | | | | | | | | | |
| Leakage Current (at 20°C) | Rated Voltage | | | 6.3 ~ 100V | | | | | | 160 ~ 450V | | | | |
| | Time | | | after 2 minutes | | | | | | after 5 minutes | | | | |
| | Case size | | | 3 ~ 10 ϕ | | | 12.5 ~ 18 ϕ | | | 12.5 ~ 18 ϕ | | | | |
| | Leakage Current | | | I = 0.01CV or 3 μ A, whichever is greater | | | I = 0.03CV or 4 μ A, whichever is greater | | | I = 0.04CV + 100 μ A | | | | |
| | Where, C = rated capacitance in μ F V = rated DC working voltage in V | | | | | | | | | | | | | |
| Dissipation Factor (Tan δ at 120Hz, 20°C) | Rated Voltage | | 4 | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 | 160 ~ 250 | 400 ~ 450 | |
| | 3 ~ 10 ϕ | | 0.42 | 0.28 | 0.24 | 0.20 | 0.14 | 0.12 | 0.10 | 0.10 | 0.10 | - | - | |
| | 12.5 ~ 16 ϕ | | - | 0.38 | 0.34 | 0.30 | 0.26 | 0.22 | 0.18 | 0.14 | 0.10 | 0.20 | 0.25 | |
| When the capacitance exceeds 1,000 μ F, 0.02 shall be added every 1,000 μ F increase. | | | | | | | | | | | | | | |
| Low Temperature Characteristics (at 120Hz) | Impedance ratio shall not exceed the values given in the table below. | | | | | | | | | | | | | |
| | Rated Voltage | | 4.0 | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 | 160 ~ 250 | 400 ~ 450 | |
| | Impedance Ratio | Z(-25°C) | ϕ D < 12.5 | 7 | 4 | 4 | 3 | 2 | 2 | 2 | 2 | 2 | - | - |
| | | /Z(+20°C) | ϕ D \geq 12.5 | - | 5 | 5 | 4 | 2 | 2 | 2 | 2 | 2 | 3 | 6 |
| | | Z(-40°C) | ϕ D < 12.5 | 15 | 8 | 5 | 4 | 3 | 3 | 3 | 3 | 3 | - | - |
| /Z(+20°C) | | ϕ D \geq 12.5 | - | 14 | 12 | 10 | 5 | 4 | 3 | 3 | 3 | 6 | 10 | |
| Endurance | Test Time | | 2,000 Hrs | | | | | | | | | | | |
| | Capacitance Change | | Within ±20% of initial value (4V: ±30%) | | | | | | | | | | | |
| | Dissipation Factor | | Less than 200% of specified value (4V: ±300%) | | | | | | | | | | | |
| | Leakage Current | | Within specified value | | | | | | | | | | | |
| | * The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 85°C. | | | | | | | | | | | | | |
| Shelf Life Test | Test time: 1,000 hours; other items are the same as those for the Endurance. The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V (Refer to JIS C 5101-4 4.1). | | | | | | | | | | | | | |
| Ripple Current & Frequency Multipliers | Freq. (Hz) | | 50 | 120 | 1k | 10k up | | | | | | | | |
| | Cap. (μ F) | | Under 1,000 | 0.80 | 1.00 | 1.25 | 1.40 | | | | | | | |
| | 1,000 < C \leq 4,700 | | 0.85 | 1.00 | 1.15 | 1.25 | | | | | | | | |

DIAGRAM OF DIMENSIONS

Fig. 1


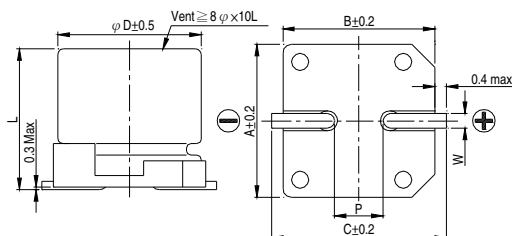


Fig. 2

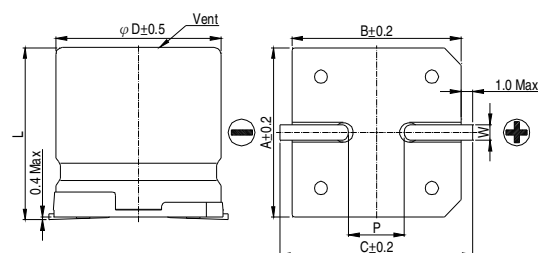

LEAD SPACING AND DIAMETER

Unit: mm

| ϕ D | L | A | B | C | W | P ± 0.2 | Fig. No. |
|----------|------------|------|------|------|-------------|---------|----------|
| 3 | 5.3 ± 0.2 | 3.3 | 3.3 | 4.1 | 0.45 ~ 0.75 | 0.8 | 1 |
| 4 | 5.3 ± 0.2 | 4.3 | 4.3 | 5.1 | 0.5 ~ 0.8 | 1.0 | 1 |
| 5 | 5.3 ± 0.2 | 5.3 | 5.3 | 6.1 | 0.5 ~ 0.8 | 1.5 | 1 |
| 6.3 | 5.3 ± 0.2 | 6.6 | 6.6 | 7.4 | 0.5 ~ 0.8 | 2.0 | 1 |
| 6.3 | 7.7 ± 0.3 | 6.6 | 6.6 | 7.4 | 0.5 ~ 0.8 | 2.0 | 1 |
| 8 | 10 ± 0.5 | 8.4 | 8.4 | 9.2 | 0.7 ~ 1.1 | 3.1 | 1 |
| 8 | 10.3 ± 0.5 | 8.4 | 8.4 | 9.2 | 0.7 ~ 1.1 | 3.1 | 1 |
| 10 | 7.7 ± 0.3 | 10.4 | 10.4 | 11.2 | 0.7 ~ 1.1 | 4.7 | 1 |
| 10 | 10 ± 0.5 | 10.4 | 10.4 | 11.2 | 0.7 ~ 1.1 | 4.7 | 1 |
| 10 | 10.3 ± 0.5 | 10.4 | 10.4 | 11.2 | 0.7 ~ 1.1 | 4.7 | 1 |
| 12.5 | 13.5 ± 0.5 | 13.0 | 13.0 | 15.0 | 1.1 ~ 1.4 | 4.4 | 2 |
| 12.5 | 16 ± 0.5 | 13.0 | 13.0 | 15.0 | 1.1 ~ 1.4 | 4.4 | 2 |
| 16 | 16.5 ± 0.5 | 17.0 | 17.0 | 19.0 | 1.1 ~ 1.4 | 6.4 | 2 |
| 18 | 16.5 ± 0.5 | 19.0 | 19.0 | 21.0 | 1.1 ~ 1.4 | 6.4 | 2 |




SMD Aluminum Electrolytic Capacitors


VE

MARKING


$\phi D = 3 \text{ mm}$




$\phi D = 4 \sim 6.3 \text{ mm}$



$\phi D = 8 \sim 10 \text{ mm}$



$\phi D \geq 12.5 \text{ mm}$

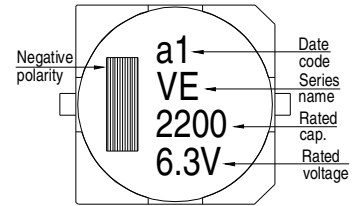

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 120 Hz, 85°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

| μF | V. DC Contents | 4V (0G) | | 6.3V (0J) | | 10V (1A) | | 16V (1C) | | 25V (1E) | | 35V (1V) | | 50V (1H) | | 63 (1J) | |
|---------------|-------------------|-------------------|-----|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|
| | | $\phi D \times L$ | mA | $\phi D \times L$ | mA | $\phi D \times L$ | mA | $\phi D \times L$ | mA | $\phi D \times L$ | mA | $\phi D \times L$ | mA | $\phi D \times L$ | mA | $\phi D \times L$ | mA |
| 0.1 | 0R1 | | | | | | | | | | | | | 4x5.3 | 3 | 4x5.3 | 2 |
| 0.22 | R22 | | | | | | | | | | | | | 4x5.3 | 5 | 4x5.3 | 3 |
| 0.33 | R33 | | | | | | | | | | | | | 4x5.3 | 6 | 4x5.3 | 4 |
| 0.47 | R47 | | | | | | | | | | | | | 4x5.3 | 7 | 4x5.3 | 5 |
| 1 | 010 | | | | | | | | | | | | | 4x5.3 | 10 | 4x5.3 | 8 |
| 2.2 | 2R2 | | | | | | | | | | | | | 4x5.3 | 14 | 4x5.3 | 12 |
| 3.3 | 3R3 | | | | | | | | | 3x5.3 | 14 | 3x5.3 | 14 | 4x5.3 | 17 | 5x5.3 | 22 |
| 4.7 | 4R7 | | | | | 3x5.3 | 14 | 3x5.3 | 14 | 4x5.3 | 26 | 4x5.3 | 26 | 4x5.3 | 20 | 5x5.3 | 25 |
| 10 | 100 | | | 3x5.3 | 16 | 4x5.3 | 26 | 4x5.3 | 26 | 5x5.3 | 44 | 5x5.3 | 44 | 5x5.3 | 35 | 6.3x5.3 | 40 |
| 22 | 220 | 3x5.3 | 16 | 4x5.3 | 26 | 5x5.3 | 44 | 4x5.3 | 30 | 5x5.3 | 47 | 5x5.3 | 47 | 6.3x5.3 | 50 | 8x10 | 139 |
| 33 | 330 | 4x5.3 | 31 | 4x5.3 | 31 | 4x5.3 | 31 | 5x5.3 | 55 | 5x5.3 | 55 | 6.3x5.3 | 67 | 6.3x7.7 | 75 | 8x10 | 139 |
| 47 | 470 | 4x5.3 | 34 | 4x5.3 | 34 | 6.3x5.3 | 75 | 5x5.3 | 55 | 6.3x5.3 | 75 | 6.3x7.7 | 98 | 6.3x7.7 | 75 | 10x10 | 200 |
| 68 | 680 | 5x5.3 | 58 | 5x5.3 | 58 | 5x5.3 | 58 | 6.3x5.3 | 89 | 6.3x7.7 | 109 | 6.3x7.7 | 109 | 8x10 | 190 | 10x10 | 226 |
| 100 | 101 | 5x5.3 | 58 | 6.3x5.3 | 89 | 6.3x5.3 | 89 | 6.3x5.3 | 89 | 6.3x7.7 | 109 | 8x10 | 252 | 8x10 | 190 | 10x10 | 226 |
| 150 | 151 | | | | | | | | | | | 10x7.7 | 252 | | | | |
| 220 | 221 | 6.3x5.3 | 89 | 6.3x5.3 | 89 | 6.3x7.7 | 124 | 6.3x7.7 | 124 | 8x10 | 270 | 8x10 | 270 | 10x10 | 320 | 12.5x13.5 | 500 |
| 330 | 331 | 6.3x7.7 | 124 | 6.3x7.7 | 124 | 8x10 | 290 | 8x10 | 290 | 10x10 | 400 | 10x10.3 | 400 | 12.5x13.5 | 600 | 12.5x16 | 600 |
| 470 | 471 | 8x10 | 290 | 8x10 | 290 | 10x7.7 | 290 | 10x10 | 400 | 10x10 | 400 | 12.5x13.5 | 750 | 12.5x16 | 740 | 16x16.5 | 850 |
| 680 | 681 | | | 10x7.7 | 290 | 10x10 | 410 | 10x10 | 410 | 12.5x13.5 | 680 | 12.5x13.5 | 680 | 16x16.5 | 1,000 | 18x16.5 | 1,100 |
| 1,000 | 102 | | | 10x10 | 430 | 10x10 | 430 | 12.5x13.5 | 750 | 12.5x13.5 | 750 | 16x16.5 | 1,100 | 18x16.5 | 1,350 | | |
| 2,200 | 222 | | | 12.5x13.5 | 890 | 12.5x13.5 | 890 | 16x16.5 | 1,100 | 16x16.5 | 1,100 | 18x16.5 | 1,450 | | | | |
| 3,300 | 332 | | | 12.5x16 | 1,000 | 16x16.5 | 1,300 | 16x16.5 | 1,300 | 18x16.5 | 1,450 | | | | | | |
| 4,700 | 472 | | | 16x16.5 | 1,400 | 16x16.5 | 1,400 | 18x16.5 | 1,600 | | | | | | | | |
| 6,800 | 682 | | | 18x16.5 | 1,700 | 18x16.5 | 1,700 | | | | | | | | | | |

| μF | V. DC Contents | 100V (2A) | | 160V (2C) | | 200V (2D) | | 250V (2E) | | 400V (2G) | | 450V (2W) | |
|---------------|-------------------|-------------------|-----|-------------------|-----|-------------------|-----|-------------------|-----|-------------------|-----|-------------------|-----|
| | | $\phi D \times L$ | mA | $\phi D \times L$ | mA | $\phi D \times L$ | mA | $\phi D \times L$ | mA | $\phi D \times L$ | mA | $\phi D \times L$ | mA |
| 4.7 | 4R7 | | | | | | | | | 12.5x13.5 | 120 | 12.5x13.5 | 120 |
| 10 | 100 | 8x10 | 90 | | | | | 12.5x13.5 | 150 | 12.5x13.5 | 120 | 12.5x16 | 130 |
| 22 | 220 | 8x10 | 90 | | | 12.5x13.5 | 240 | 12.5x13.5 | 150 | 16x16.5 | 140 | 16x16.5 | 140 |
| 33 | 330 | 10x10 | 120 | 12.5x13.5 | 290 | 12.5x16 | 310 | 12.5x16 | 240 | 16x16.5 | 140 | 18x16.5 | 180 |
| 47 | 470 | 10x10 | 120 | 12.5x16 | 370 | 16x16.5 | 420 | 16x16.5 | 340 | 18x16.5 | 280 | | |
| 68 | 680 | 12.5x13.5 | 380 | 16x16.5 | 500 | 16x16.5 | 420 | 18x16.5 | 440 | | | | |
| 100 | 101 | 12.5x13.5 | 440 | 18x16.5 | 650 | 18x16.5 | 550 | | | | | | |
| 220 | 221 | 16x16.5 | 600 | | | | | | | | | | |
| 330 | 331 | 18x16.5 | 780 | | | | | | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [Lelon manufacturer](#):

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)
[MAL224699813E3](#) [MAL215099014E3](#) [MAL215099017E3](#) [MAL215099117E3](#) [MAL215099818E3](#) [AEH1010331M025R](#)
[AEA1010221M035R](#) [AEH1010221M025R](#) [AEA1010102M016R](#) [AEA0810331M025R](#) [AEA1213102M025R](#) [AEA1213331M050R](#)
[AEH1012471M016R](#) [MAL213967339E3](#) [ZSC00AF2211EARL](#) [VB1E100MB054000CE0](#) [RVT0J471M0607](#) [RVT1000UF10V34RV0081](#)
[XT100UF50V90RV0067](#) [RVE100UF16V67RV0046](#) [RST22UF35V025](#) [RVT100UF16V67RV0120](#) [XT47UF50V90RV0082](#)
[XT22UF50V90RV0083](#) [RST22UF50V026](#) [RST10UF16V013](#) [RST100UF25V004](#) [RST100UF35V009](#) [RST47UF25V035](#) [RST47UF50V038](#)
[RST220UF25V019](#) [RSL220UF25V021](#) [XT10UF25V90RV0068](#) [FZ100UF50V90RV0066](#) [RST100UF16V003](#) [XT100UF10V90RV0060](#)
[XT100UF16V90RV0061](#)