

Features

- 3 ~ 18 ϕ , 85°C, 2,000 hours assured
- Chip type large capacitance capacitors
- Designed for surface mounting on high density PC board
- RoHS Compliance



Marking color: Black

SPECIFICATIONS

Items	Performance																																																																									
Category Temperature Range	-40°C ~ +85°C																																																																									
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																																																									
Leakage Current (at 20°C)	Rated Voltage			6.3 ~ 100V						160 ~ 450V																																																																
	Time			after 2 minutes						after 5 minutes																																																																
	Case size			3 ~ 10 ϕ			12.5 ~ 18 ϕ			12.5 ~ 18 ϕ																																																																
	Leakage Current			I = 0.01CV or 3 μ A, whichever is greater			I = 0.03CV or 4 μ A, whichever is greater			I = 0.04CV + 100 μ A																																																																
	Where, C = rated capacitance in μ F V = rated DC working voltage in V																																																																									
Dissipation Factor (Tan δ at 120Hz, 20°C)	<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160 ~ 250</th> <th>400 ~ 450</th> </tr> </thead> <tbody> <tr> <td>3 ~ 10 ϕ</td> <td>0.42</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.10</td> <td>-</td> <td>-</td> </tr> <tr> <td>12.5 ~ 16 ϕ</td> <td>-</td> <td>0.38</td> <td>0.34</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.14</td> <td>0.10</td> <td>0.20</td> <td>0.25</td> </tr> </tbody> </table>												Rated Voltage	4	6.3	10	16	25	35	50	63	100	160 ~ 250	400 ~ 450	3 ~ 10 ϕ	0.42	0.28	0.24	0.20	0.14	0.12	0.10	0.10	0.10	-	-	12.5 ~ 16 ϕ	-	0.38	0.34	0.30	0.26	0.22	0.18	0.14	0.10	0.20	0.25																										
	Rated Voltage	4	6.3	10	16	25	35	50	63	100	160 ~ 250	400 ~ 450																																																														
	3 ~ 10 ϕ	0.42	0.28	0.24	0.20	0.14	0.12	0.10	0.10	0.10	-	-																																																														
12.5 ~ 16 ϕ	-	0.38	0.34	0.30	0.26	0.22	0.18	0.14	0.10	0.20	0.25																																																															
When the capacitance exceeds 1,000 μ F, 0.02 shall be added every 1,000 μ F increase.																																																																										
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.																																																																									
	Rated Voltage		<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>4.0</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160 ~ 250</th> <th>400 ~ 450</th> </tr> </thead> <tbody> <tr> <td rowspan="4">Impedance Ratio</td> <td>Z(-25°C)</td> <td>ϕ D < 12.5</td> <td>7</td> <td>4</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>-</td> <td>-</td> </tr> <tr> <td>/Z(+20°C)</td> <td>ϕ D \geq 12.5</td> <td>-</td> <td>5</td> <td>5</td> <td>4</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>6</td> </tr> <tr> <td>Z(-40°C)</td> <td>ϕ D < 12.5</td> <td>15</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>-</td> <td>-</td> </tr> <tr> <td>/Z(+20°C)</td> <td>ϕ D \geq 12.5</td> <td>-</td> <td>14</td> <td>12</td> <td>10</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>6</td> <td>10</td> </tr> </tbody> </table>											Rated Voltage	4.0	6.3	10	16	25	35	50	63	100	160 ~ 250	400 ~ 450	Impedance Ratio	Z(-25°C)	ϕ D < 12.5	7	4	4	3	2	2	2	2	-	-	/Z(+20°C)	ϕ D \geq 12.5	-	5	5	4	2	2	2	2	3	6	Z(-40°C)	ϕ D < 12.5	15	8	5	4	3	3	3	3	-	-	/Z(+20°C)	ϕ D \geq 12.5	-	14	12	10	5	4	3	3	6	10
	Rated Voltage	4.0	6.3	10	16	25	35	50	63	100	160 ~ 250	400 ~ 450																																																														
	Impedance Ratio	Z(-25°C)	ϕ D < 12.5	7	4	4	3	2	2	2	2	-	-																																																													
		/Z(+20°C)	ϕ D \geq 12.5	-	5	5	4	2	2	2	2	3	6																																																													
Z(-40°C)		ϕ D < 12.5	15	8	5	4	3	3	3	3	-	-																																																														
/Z(+20°C)		ϕ D \geq 12.5	-	14	12	10	5	4	3	3	6	10																																																														
Test Time		2,000 Hrs																																																																								
Capacitance Change		Within ±20% of initial value (4V: ±30%)																																																																								
Dissipation Factor		Less than 200% of specified value (4V: ±300%)																																																																								
Leakage Current		Within specified value																																																																								
* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 85°C.																																																																										
Shelf Life Test	Test time: 1,000 hours; other items are the same as those for the Endurance. The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V (Refer to JIS C 5101-4 4.1).																																																																									
Ripple Current & Frequency Multipliers	<table border="1"> <thead> <tr> <th rowspan="2">Cap. (μF)</th> <th colspan="4">Freq. (Hz)</th> </tr> <tr> <th>50</th> <th>120</th> <th>1k</th> <th>10k up</th> </tr> </thead> <tbody> <tr> <td>Under 1,000</td> <td>0.80</td> <td>1.00</td> <td>1.25</td> <td>1.40</td> </tr> <tr> <td>1,000 < C \leq 4,700</td> <td>0.85</td> <td>1.00</td> <td>1.15</td> <td>1.25</td> </tr> </tbody> </table>												Cap. (μ F)	Freq. (Hz)				50	120	1k	10k up	Under 1,000	0.80	1.00	1.25	1.40	1,000 < C \leq 4,700	0.85	1.00	1.15	1.25																																											
	Cap. (μ F)	Freq. (Hz)																																																																								
		50	120	1k	10k up																																																																					
Under 1,000	0.80	1.00	1.25	1.40																																																																						
1,000 < C \leq 4,700	0.85	1.00	1.15	1.25																																																																						

DIAGRAM OF DIMENSIONS

Fig. 1


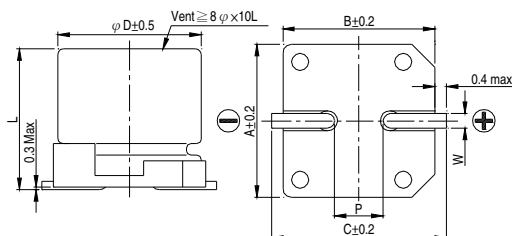


Fig. 2

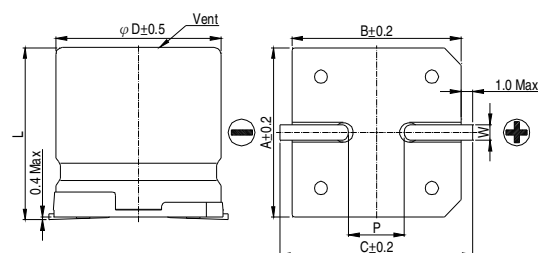

LEAD SPACING AND DIAMETER

Unit: mm

ϕ D	L	A	B	C	W	P \pm 0.2	Fig. No.
3	5.3 \pm 0.2	3.3	3.3	4.1	0.45 ~ 0.75	0.8	1
4	5.3 \pm 0.2	4.3	4.3	5.1	0.5 ~ 0.8	1.0	1
5	5.3 \pm 0.2	5.3	5.3	6.1	0.5 ~ 0.8	1.5	1
6.3	5.3 \pm 0.2	6.6	6.6	7.4	0.5 ~ 0.8	2.0	1
6.3	7.7 \pm 0.3	6.6	6.6	7.4	0.5 ~ 0.8	2.0	1
8	10 \pm 0.5	8.4	8.4	9.2	0.7 ~ 1.1	3.1	1
8	10.3 \pm 0.5	8.4	8.4	9.2	0.7 ~ 1.1	3.1	1
10	7.7 \pm 0.3	10.4	10.4	11.2	0.7 ~ 1.1	4.7	1
10	10 \pm 0.5	10.4	10.4	11.2	0.7 ~ 1.1	4.7	1
10	10.3 \pm 0.5	10.4	10.4	11.2	0.7 ~ 1.1	4.7	1
12.5	13.5 \pm 0.5	13.0	13.0	15.0	1.1 ~ 1.4	4.4	2
12.5	16 \pm 0.5	13.0	13.0	15.0	1.1 ~ 1.4	4.4	2
16	16.5 \pm 0.5	17.0	17.0	19.0	1.1 ~ 1.4	6.4	2
18	16.5 \pm 0.5	19.0	19.0	21.0	1.1 ~ 1.4	6.4	2




SMD Aluminum Electrolytic Capacitors


VE

MARKING


$\phi D = 3 \text{ mm}$




$\phi D = 4 \sim 6.3 \text{ mm}$



$\phi D = 8 \sim 10 \text{ mm}$



$\phi D \geq 12.5 \text{ mm}$

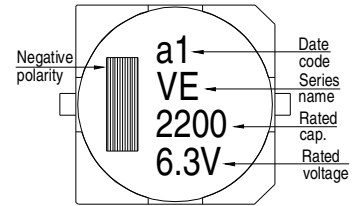

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 120 Hz, 85°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

μF	V. DC Contents	4V (0G)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63 (1J)	
		$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
0.1	0R1													4x5.3	3	4x5.3	2
0.22	R22													4x5.3	5	4x5.3	3
0.33	R33													4x5.3	6	4x5.3	4
0.47	R47													4x5.3	7	4x5.3	5
1	010													4x5.3	10	4x5.3	8
2.2	2R2													4x5.3	14	4x5.3	12
3.3	3R3									3x5.3	14	3x5.3	14	4x5.3	17	5x5.3	22
4.7	4R7					3x5.3	14	3x5.3	14	4x5.3	26	4x5.3	26	4x5.3	20	5x5.3	25
10	100			3x5.3	16	4x5.3	26	4x5.3	26	5x5.3	44	5x5.3	44	5x5.3	35	6.3x5.3	40
22	220	3x5.3	16	4x5.3	26	5x5.3	44	4x5.3	30	5x5.3	47	5x5.3	47	6.3x5.3	50	8x10	139
33	330	4x5.3	31	4x5.3	31	4x5.3	31	5x5.3	55	5x5.3	55	6.3x5.3	67	6.3x7.7	75	8x10	139
47	470	4x5.3	34	4x5.3	34	6.3x5.3	75	5x5.3	55	6.3x5.3	75	6.3x7.7	98	6.3x7.7	75	10x10	200
68	680	5x5.3	58	5x5.3	58	5x5.3	58	6.3x5.3	89	6.3x5.3	89	6.3x7.7	109	8x10	190	10x10	226
100	101	5x5.3	58	6.3x5.3	89	6.3x5.3	89	6.3x5.3	89	6.3x7.7	109	6.3x7.7	109	8x10	190	10x10	226
150	151											10x7.7	252				
220	221	6.3x5.3	89	6.3x5.3	89	6.3x7.7	124	6.3x7.7	124	8x10	270	8x10	270	10x10	320	12.5x13.5	500
330	331	6.3x7.7	124	6.3x7.7	124	8x10	290	8x10	290	10x10	400	10x10.3	400	12.5x13.5	600	12.5x16	600
470	471	8x10	290	8x10	290	10x7.7	290	10x10	400	10x10	400	12.5x13.5	750	12.5x16	740	16x16.5	850
680	681			10x7.7	290	10x10	410	10x10	410	12.5x13.5	680	12.5x13.5	680	16x16.5	1,000	18x16.5	1,100
1,000	102			10x10	430	10x10	430	12.5x13.5	750	12.5x13.5	750	16x16.5	1,100	18x16.5	1,350		
2,200	222			12.5x13.5	890	12.5x13.5	890	16x16.5	1,100	16x16.5	1,100	18x16.5	1,450				
3,300	332			12.5x16	1,000	16x16.5	1,300	16x16.5	1,300	18x16.5	1,450						
4,700	472			16x16.5	1,400	16x16.5	1,400	18x16.5	1,600								
6,800	682			18x16.5	1,700	18x16.5	1,700										

μF	V. DC Contents	100V (2A)		160V (2C)		200V (2D)		250V (2E)		400V (2G)		450V (2W)	
		$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
4.7	4R7									12.5x13.5	120	12.5x13.5	120
10	100	8x10	90					12.5x13.5	150	12.5x13.5	120	12.5x16	130
22	220	8x10	90			12.5x13.5	240	12.5x13.5	150	16x16.5	140	16x16.5	140
33	330	10x10	120	12.5x13.5	290	12.5x16	310	12.5x16	240	16x16.5	140	18x16.5	180
47	470	10x10	120	12.5x16	370	16x16.5	420	16x16.5	340	18x16.5	280		
68	680	12.5x13.5	380	16x16.5	500	16x16.5	420	18x16.5	440				
100	101	12.5x13.5	440	18x16.5	650	18x16.5	550						
220	221	16x16.5	600										
330	331	18x16.5	780										

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [Lelon manufacturer](#):

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)
[MAL224699813E3](#) [MAL215099014E3](#) [MAL215099017E3](#) [MAL215099117E3](#) [MAL215099818E3](#) [AEH1010331M025R](#)
[AEA1010221M035R](#) [AEH1010221M025R](#) [AEA1010102M016R](#) [AEA0810331M025R](#) [AEA1213102M025R](#) [AEA1213331M050R](#)
[AEH1012471M016R](#) [MAL213967339E3](#) [ZSC00AF2211EARL](#) [VB1E100MB054000CE0](#) [RVT0J471M0607](#) [RVT1000UF10V34RV0081](#)
[XT100UF50V90RV0067](#) [RVE100UF16V67RV0046](#) [RST22UF35V025](#) [RVT100UF16V67RV0120](#) [XT47UF50V90RV0082](#)
[XT22UF50V90RV0083](#) [RST22UF50V026](#) [RST10UF16V013](#) [RST100UF25V004](#) [RST100UF35V009](#) [RST47UF25V035](#) [RST47UF50V038](#)
[RST220UF25V019](#) [RSL220UF25V021](#) [XT10UF25V90RV0068](#) [FZ100UF50V90RV0066](#) [RST100UF16V003](#) [XT100UF10V90RV0060](#)
[XT100UF16V90RV0061](#)