



#### www.lemo.com

## **SUMMARY**

#### # Wires

Low voltage 7



Image is for illustrative purpose only

Series 2B

**Termination type** Female crimp

IP rating 50

AWG wire size 20.00 - 18.00 Cable Ø 0.00 - 0.00 mm

Status active

Matching parts FGG.2B.307.CYCD62

#### **Download**

Request a quote

Catalog

### **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model EG\*: Fixed receptacle, nut fixing

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Weight 15.23 g

#### **Performance**

**Configuration** 2B.307: 7 Low Voltage

**Insulator** Y: PEEK for crimp contacts

Rated Current 11 Amps

### **Specifications**

Contact Type: Crimp Contact Retention: 40 N

Contact Dia.: 1.3 mm (0.051in)
Bucket Dia.: 1.4 mm (0.055in)
Min. Conductor: 0.5 mm^2 (AWG 20)
Max. Conductor: 1 mm^2 (AWG 18)

R (max): 3.6 mOhm

Vtest (contact-shell): 2150 V (AC), 3040 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Vtest (contact-contact): 1950 V (AC), 2750 V (DC)

#### **Others**


Endurance (Shell): 5000

Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

# **DRAWINGS**

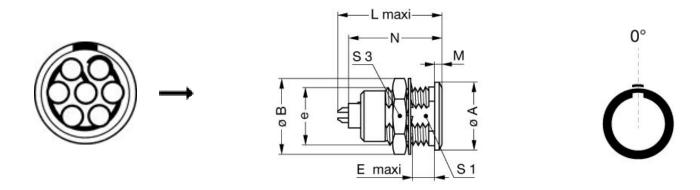

#### **Dimensions**

	А	В	E	L	М	N	S1	<b>S</b> 3	e
mm.	18	19.5	8.5	26.7	1.8	24.6	13.5	17	M15x1.0
in.	0,71	0,77	0,33	1,05	0,07	0,97	0,53	0,67	

## **RECOMMENDED BY LEMO**

#### **Tools**

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 18-20/8-7

Positionner: <a href="DCE.91.132.BVM">DCE.91.132.BVM</a>
Extractor: <a href="DCF.91.131.2LT">DCF.91.131.2LT</a>
Replacement contact: <a href="EGG.2B.665.ZZM">EGG.2B.665.ZZM</a>

#### **Cables**

CMN.07.T18.070PGZE		Grey	
CMN.07.T18.070PNZE			
CMN.07.T20.062PGZE		Grey	
CMN.07.T20.062PNZE			
CMN.07.T20.062QGZE	TPR (medical)	Grey	
CMN.07.T26.037QGZE	TPR (medical)	Grey	
CMN.07.T28.044PGZE		Grey	
CMN.07.T28.044PNZE			
270250	PVC	Grey	
370500	PVC	Grey	
70140	PVC	Grey	
7041	PVC	Grey	
7050	PVC	Black	
717920	PVC	Grey	> □€
CTR.75.030.121875G	PVC	Grey	>> 0€

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 EZG.0B.309.CLN FFA.2S.310.ZLA FGA.1B.307.CYCD72Z FGJ.1B.304.CLLD76 FGJ.1B.306.CWLD72 FGJ.3B.304.CYMD10Z FGJ.3B.304.CYMD82Z PCS.01.250.DLLE24 PHG.0K.305.CYMC40Z PHG.1K.308.CLLK85 PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.10.290.DN GMA.3B.090.DA PRG.M0.6GL.LC52GZ PSA.1S.275.CTLC66 ABF.1S.250.NTA 133020F 1331ER193MZ 1332M107MZ DTS26Z19-32JA-LC DTS26Z19-32SA DTS26Z19-32SA-LC DTS26Z23-55HA DTS26Z23-55HA-LC DTS26Z23-55JA-LC EAJ.1B.306.CWA ECG.XB.312.CLL 1589430-2 EEA.0B.305.CLN EEA.0B.309.CLL ELF.00.250.NTL ERA.01.250.DLL BRR.2S.200.PZVG HR10A-P CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 ESB.00.303.NLL EXG.0B.309.HLN FFB.1S.250.CLAC27 FGA.2B.306.CYCD92 FGA.2B.306.CYCD92Z FGA.XB.312.CLAD72 FGJ.1B.302.CYMD62 FGJ.3B.308.CLLD72Z