



www.lemo.com

SUMMARY

Wires

Low voltage 5



Image is for illustrative purpose only

Series 0F

Termination type Female crimp

IP rating 67

AWG wire size 26.00 - 22.00 Cable Ø 3.80 - 9.00 mm

Status active

Matching parts FGN.0F.305.XLC

Download

Request a quote

Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model EH*: Fixed receptacle, nut fixing (back panel mounting, printed circuit mounting possible)

Keying 3 keys (beta=165, gamma=30, plug: male contacts, receptacle: female contacts)

Housing Material

Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces

bronze/brass

Weight 4.48 g

Performance

Configuration 0F.305 : 5 Low Voltage
Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 6.5 Amps

Specifications

Contact Type: Crimp Contact Retention: 22 N Contact Dia.: 0.7 mm (0.028in) Bucket Dia.: 0.8 mm (0.031in)

Min. Conductor: 0.14 mm^2 (AWG 26) Max. Conductor: 0.34 mm^2 (AWG 22)

R (max): 6.1 mOhm

Vtest (contact-shell): 1200 V (AC), 1700 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Vtest (contact-contact): 1250 V (AC), 1770 V (DC)

Others

Endurance (Shell): 1000 mating cycles Temp (min / max): -15°C / +200°C


Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms]

Climatical Category: 15/200/21 (Aluminium shell)

Salt Spray Corrosion: max. 48 hr

DRAWINGS

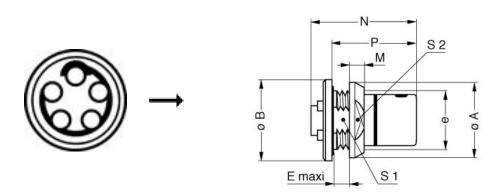



Dimensions

		А	В	E	М	N	Р	S 1	S2	e
1	mm.	13	14	3	2.5	19	14.5	9	11	M10x0.75
	in.	0,51	0,55	0,12	0,10	0,75	0,57	0,35	0,43	

RECOMMENDED BY LEMO

Tools

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 22-24-26/6-5-5

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Positionner: DCE.91.070.BVM
Extractor: DCF.93.070.4LT
Replacement contact: EGG.0B.655.ZZM

Cables

CMN.05.T22.051QGZE	TPR (medical)	Grey	>€
CMN.05.T28.029PGCE	PVC	GREY	
CMN.05.T28.029PGZE		Grey	>€
CMN.05.T28.029PNCE	PVC	Black	>
CMN.05.T28.029PNZE			>€
150250	PVC	Grey	
50090	PVC	Black	
50140	PVC	Grey	
5050	PVC	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 EZG.0B.309.CLN FFA.2S.310.ZLA FGA.1B.307.CYCD72Z FGJ.1B.304.CLLD76 FGJ.1B.306.CWLD72 FGJ.3B.304.CYMD10Z FGJ.3B.304.CYMD82Z FHG.1B.303.CYCZ PCS.01.250.DLLE24 PHG.0K.305.CYMC40Z PHG.1K.308.CLLK85 PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.10.290.DN GMA.3B.090.DA PRG.M0.6GL.LC52GZ PSA.1S.275.CTLC66 ABF.1S.250.NTA 133020F 1331ER193MZ 1332M107MZ DTS26Z19-32JA-LC DTS26Z19-32SA DTS26Z19-32SA-LC EAJ.1B.306.CWA ECG.XB.312.CLL 1589430-2 EEA.0B.305.CLN EEA.0B.309.CLL ELF.00.250.NTL ERA.01.250.DLL BRR.2S.200.PZVG HR10A-P CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 ESB.00.303.NLL EXG.0B.309.HLN FFB.1S.250.CLAC27 FGA.2B.306.CYCD92 FGA.2B.306.CYCD92Z FGJ.1B.302.CYMD62 FGJ.3B.308.CLLD72Z FHG.1B.303.CYCD62 FLC.00.250.CTAC31 PCS.01.250.DLLE31