

www.lemo.com

# FGA.0B.303.CLAD31

## SUMMARY

#### # Wires

Low voltage 3



Image is for illustrative purpose only

Series 0B

Termination type Male solder

IP rating 50

AWG wire size 28.00 - 20.00 Cable Ø 2.30 - 3.20 mm

Status obsolete

Alternative part FGA.0B.303.CLAD32

Matching parts EGA.0B.303.CLL

#### **Download**

Request a quote

Catalog

See video assembly instructions

### **TECHNICAL DETAILS**

#### Mechanics

Shell Style/Model FG\*: Straight plug, cable collet

**Keying** 2 keys (alpha=30, plug: male contacts, receptacle: female contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Weight 8.55 g

#### **Performance**

Configuration 0B.303 : 3 Low Voltage Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 8 Amps

### **Specifications**

Contact Type: Solder

Contact Dia.: 0.9 mm (0.035in) Bucket Dia.: 1.0 mm (0.039in)

Max. Solid Conductor: 0.56 mm<sup>2</sup> (AWG 20) Max. Stranded Conductor: 0.56 mm<sup>2</sup> (AWG 20)

R (max): 4.8 mOhm

Vtest (contact-shell): 900 V (AC), 1270 V (DC) Vtest (contact-contact): 1200 V (AC), 1700 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

#### **Others**


Endurance (Shell): 5000

Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

# **DRAWINGS**

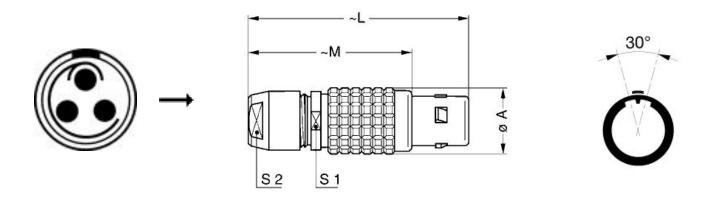

#### **Dimensions**

	А	L	М	<b>S</b> 1	S2
mm.	9.5	36	26	8	7
in.	0,37	1,42	1,02	0,31	0,28

## **RECOMMENDED BY LEMO**

#### **Tools**

Spanner wrench: DCD.0B.005.PA070

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

### Cables

CMN.03.T28.031PGCE	PVC	GREY	-
CMN.03.T28.031PGZE		Grey	-
CMN.03.T28.031PNCE	PVC	Black	>
CMN.03.T28.031PNZE			-
30141	PVC	Grey	
3041	PVC	Grey	>€
3050	PVC	Black	>
3081	PVC	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 EZG.0B.309.CLN FFA.2S.310.ZLA FGA.1B.307.CYCD72Z FGJ.1B.304.CLLD76 FGJ.1B.306.CWLD72 FGJ.3B.304.CYMD10Z FGJ.3B.304.CYMD82Z FHG.1B.303.CYCZ PCS.01.250.DLLE24 PHG.0K.305.CYMC40Z PHG.1K.308.CLLK85 PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.10.290.DN GMA.3B.090.DA PRG.M0.6GL.LC52GZ PSA.1S.275.CTLC66 ABF.1S.250.NTA 133020F 1331ER193MZ 1332M107MZ DTS26Z19-32JA-LC DTS26Z19-32SA DTS26Z19-32SA-LC EAJ.1B.306.CWA ECG.XB.312.CLL 1589430-2 EEA.0B.305.CLN EEA.0B.309.CLL ELF.00.250.NTL ERA.01.250.DLL BRR.2S.200.PZVG HR10A-P CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 ESB.00.303.NLL EXG.0B.309.HLN FFB.1S.250.CLAC27 FGA.2B.306.CYCD92 FGA.2B.306.CYCD92Z FGJ.1B.302.CYMD62 FGJ.3B.308.CLLD72Z FHG.1B.303.CYCD62 FLC.00.250.CTAC31 PCS.01.250.DLLE31