

www.lemo.com

# FGB.1B.304.CYCD52Z

## **SUMMARY**

#### # Wires

Low voltage 4



Image is for illustrative purpose only

Series 1B

**Termination type** Male crimp

IP rating 50

AWG wire size 24.00 - 20.00 Cable Ø 4.30 - 5.20 mm

Status active

Matching parts EGB.1B.304.CYM

#### **Download**

Request a quote

Catalog

See video assembly instructions

### **TECHNICAL DETAILS**

#### Mechanics

Shell Style/Model FG\*: Straight plug, cable collet and nut for fitting a bend relief

**Keying** 2 keys (alpha=60, plug: male contacts, receptacle: female contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Variant Z: Nut for fitting a bend relief

#### **Performance**

Configuration 1B.304: 4 Low Voltage

Insulator Y: PEEK for crimp contacts

Rated Current 10 Amps

### **Specifications**

Contact Type: Crimp Contact Retention: 30 N Contact Dia.: 0.9 mm (0.035in)

Bucket Dia.: 1.1 mm (0.043in)

Min. Conductor: 0.25 mm<sup>2</sup> (AWG 24) Max. Conductor: 0.5 mm<sup>2</sup> (AWG 20)

R (max): 4.8 mOhm

Vtest (contact-shell): 1800 V (AC), 2550 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Vtest (contact-contact): 1700 V (AC), 2400 V (DC)

#### **Others**


Endurance (Shell): 5000

Temp (min / max): -55°C / +250°C

Humidity (max):  $\leq 95\%$  [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

# **DRAWINGS**

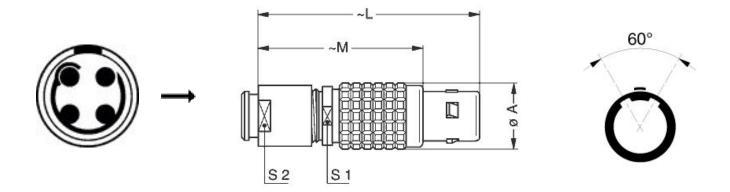

#### **Dimensions**

	А	L	М	<b>S</b> 1	S2
mm.	12	42	31	10	9
in.	0,47	1,65	1,22	0,39	0,35

## **RECOMMENDED BY LEMO**

#### **Tools**

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 20-22-24/6-5-5

Positionner: <a href="DCE.91.091.BVC">DCE.91.091.BVC</a>
Extractor: <a href="DCF.91.090.2LT">DCF.91.090.2LT</a>
Replacement contact: FGG.1B.560.ZZC
Spanner wrench: <a href="DCD.1B.015.PA090">DCD.1B.015.PA090</a>

### **Cables**

CMN.04.T22.047QGC	TPR	Grey	
CMN.04.T22.048QGZE	TPR (medical)	Grey	<b>-</b>
140240	PVC	Black	-
140250	PVC	Grey	
40260	PVC	Black	
4080	PVC	Grey	
4221	PVC	Black	
4280	PVC	Black	
80080	PVC	Grey	
80082	PVC	Red	
80084	PVC	Black	

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 EZG.0B.309.CLN FFA.2S.310.ZLA FGA.1B.307.CYCD72Z FGJ.1B.304.CLLD76 FGJ.1B.306.CWLD72 FGJ.3B.304.CYMD10Z FGJ.3B.304.CYMD82Z PCS.01.250.DLLE24 PHG.0K.305.CYMC40Z PHG.1K.308.CLLK85 PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.10.290.DN GMA.3B.090.DA PRG.M0.6GL.LC52GZ PSA.1S.275.CTLC66 ABF.1S.250.NTA 133020F 1331ER193MZ 1332M107MZ DTS26Z19-32JA-LC DTS26Z19-32SA DTS26Z19-32SA-LC DTS26Z23-55HA DTS26Z23-55HA-LC DTS26Z23-55JA-LC EAJ.1B.306.CWA ECG.XB.312.CLL 1589430-2 EEA.0B.305.CLN EEA.0B.309.CLL ELF.00.250.NTL ERA.01.250.DLL BRR.2S.200.PZVG HR10A-P CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 ESB.00.303.NLL EXG.0B.309.HLN FFB.1S.250.CLAC27 FGA.2B.306.CYCD92 FGA.2B.306.CYCD92Z FGA.XB.312.CLAD72 FGJ.1B.302.CYMD62 FGJ.3B.308.CLLD72Z