

www.lemo.com

# FGG.3B.306.CLAD62

## **SUMMARY**

#### # Wires

Low voltage 6



Image is for illustrative purpose only

Series 3B

Termination type Male solder

IP rating 50

AWG wire size 24.00 - 16.00 Cable Ø 4.90 - 6.20 mm

Status active

Matching parts EGG.3B.306.CLL

#### **Download**

Request a quote

Eplan Catalog

See video assembly instructions

## **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model FG\*: Straight plug, cable collet

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Weight 48.25 g

#### **Performance**

Configuration 3B.306 : 6 Low Voltage Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 17 Amps

### **Specifications**

Contact Type: Solder

Contact Dia.: 1.6 mm (0.063in) Bucket Dia.: 1.4 mm (0.055in)

Max. Solid Conductor: 1 mm<sup>2</sup> (AWG 16) Max. Stranded Conductor: 1 mm<sup>2</sup> (AWG 18)

R (max): 3.5 mOhm

Vtest (contact-shell): 1150 V (AC), 1630 V (DC) Vtest (contact-contact): 1600 V (AC), 2250 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

#### **Others**


Endurance (Shell): 5000

Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

# **DRAWINGS**

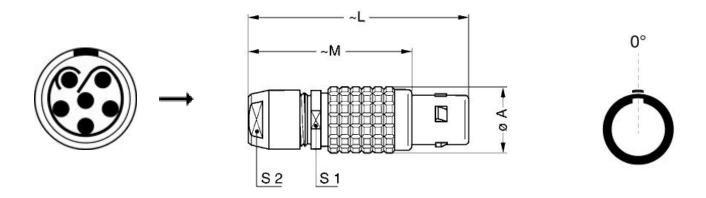

#### **Dimensions**

	А	L	М	<b>S</b> 1	S2
mm.	18	58	43	15	14
in.	0,71	2,28	1,69	0,59	0,55

# **RECOMMENDED BY LEMO**

### Tools

Spanner wrench: <a href="DCD.3B.040.PA140">DCD.3B.040.PA140</a>
Caps: <a href="BFG.3B.100.PCSG">BFG.3B.100.PCSG</a>

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

### **Cables**

CMN.06.T20.062PGZE		Grey	<b>&gt;</b> ──€
CMN.06.T20.062PNZE			>€
CMN.06.T20.062QGZE	TPR (medical)	Grey	<b>&gt;</b> ──€
106220	PVC	Black	
12080	PVC	Grey	
160240	PVC	Black	
160260	PVC	Black	
260250	PVC	Grey	<b>&gt;===</b>
6280	PVC	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 EZG.0B.309.CLN FFA.2S.310.ZLA FGA.1B.307.CYCD72Z FGJ.1B.304.CLLD76 FGJ.1B.306.CWLD72 FGJ.3B.304.CYMD10Z FGJ.3B.304.CYMD82Z PCS.01.250.DLLE24 PHG.0K.305.CYMC40Z PHG.1K.308.CLLK85 PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.10.290.DN GMA.3B.090.DA PRG.M0.6GL.LC52GZ PSA.1S.275.CTLC66 ABF.1S.250.NTA 133020F 1331ER193MZ 1332M107MZ DTS26Z19-32JA-LC DTS26Z19-32SA DTS26Z19-32SA-LC DTS26Z23-55HA DTS26Z23-55HA-LC DTS26Z23-55JA-LC EAJ.1B.306.CWA ECG.XB.312.CLL 1589430-2 EEA.0B.305.CLN EEA.0B.309.CLL ELF.00.250.NTL ERA.01.250.DLL BRR.2S.200.PZVG HR10A-P CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 ESB.00.303.NLL EXG.0B.309.HLN FFB.1S.250.CLAC27 FGA.2B.306.CYCD92 FGA.2B.306.CYCD92Z FGA.XB.312.CLAD72 FGJ.1B.302.CYMD62 FGJ.3B.308.CLLD72Z