

www.lemo.com

# FLA.1S.250.CTAC32

## SUMMARY

#### # Wires

Coax 1



Image is for illustrative purpose only

15 **Series** 

Male solder Coaxial Termination type

IP rating 50

AWG wire size 0.00 - 0.00Cable Ø 2.20 - 3.20 mm

**Status** active

Matching parts ERA.1S.250.CTL

#### **Download**

Request a quote

Catalog

## **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model FLA\*: Elbow plug, cable collet

Keying Circular, male

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] **Housing Material** 

brass latch sleeve and mid pieces

Weight 25.15 g

#### **Performance**

Configuration 1S.250: 1 Coax (50 Ohm)

Insulator T: PTFE **Rated Current** 12 Amps

### **Specifications**

Contact Type: Coaxial 50 Ohm (Solder)

Contact Dia.: 1.6 mm (0.063in) Bucket Dia.: 1.4 mm (0.055in) Vtest: 3000 V (AC), 4200 V (DC)

Impedance: 50 Ohm VSWR: 1.01 + 0.23 \* f/GHz

Cable type: RG 178 B/U, RG 196 A/U, RG 188 A/U, RG 316 B/U, RG 174 A/U, HF-2114, RG 122 /U

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


### **Others**

Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >144 hr

# **DRAWINGS**

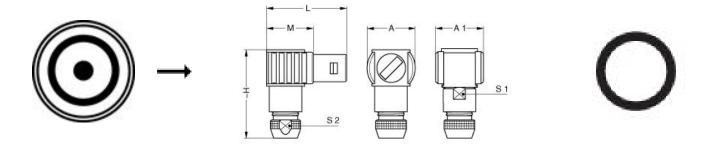

#### **Dimensions**

|     | A    | A1   | н    | L    | М    | <b>S</b> 1 | S2   |
|-----|------|------|------|------|------|------------|------|
| mm. | 16   | 16   | 28.5 | 26.5 | 15.5 | 10         | 8.5  |
| in. | 0,63 | 0,63 | 1,12 | 1,04 | 0,61 | 0,39       | 0,33 |

# **RECOMMENDED BY LEMO**

#### **Tools**

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

### **Cables**

| 47420              | DVC       | DII.  |  |
|--------------------|-----------|-------|--|
| 17420              | PVC       | Black |  |
| 17450              | COPOLYMER | Black |  |
| 18700              | PTFE      | White |  |
| 18800              | PTFE      | White |  |
| 31600              | PTFE      | Brown |  |
| CCX.50.RG0.58AU14B | FEP       | White |  |
| CCX.50.RG1.74-U25N | PVC       | Black |  |
| CCX.50.RG1.74AU28N | PVC       | Black |  |
| CCX.50.RG1.74AU28N | PVC       | Black |  |
| CCX.50.RG1.74U25N  | PVC       | Black |  |
| CCX.50.RG1.88AU24B | TFE       | White |  |
| CCX.50.RG1.88AU26B | PFA       | White |  |
| CCX.50.RG1.88AU26B | PTFE      | White |  |
| CCX.50.RG3.16BU26M | FEP       | Brown |  |
| CCX.50.RG3.16U28M  | PTFE      | Brown |  |
| CCX.75.RG1.79BU26M | FEP       | Brown |  |
| CCX.75.RG1.87AU26B | PFA       | White |  |
| CCX.75.RG1.87AU27B | PTFE      | White |  |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 EZG.0B.309.CLN FFA.2S.310.ZLA FGA.1B.307.CYCD72Z FGJ.1B.304.CLLD76 FGJ.1B.306.CWLD72 FGJ.3B.304.CYMD10Z FGJ.3B.304.CYMD82Z PCS.01.250.DLLE24 PHG.0K.305.CYMC40Z PHG.1K.308.CLLK85 PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.10.290.DN GMA.3B.090.DA PRG.M0.6GL.LC52GZ PSA.1S.275.CTLC66 ABF.1S.250.NTA 133020F 1331ER193MZ 1332M107MZ DTS26Z19-32JA-LC DTS26Z19-32SA DTS26Z19-32SA-LC DTS26Z23-55HA DTS26Z23-55HA-LC DTS26Z23-55JA-LC EAJ.1B.306.CWA ECG.XB.312.CLL 1589430-2 EEA.0B.305.CLN EEA.0B.309.CLL ELF.00.250.NTL ERA.01.250.DLL BRR.2S.200.PZVG HR10A-P CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 ESB.00.303.NLL EXG.0B.309.HLN FFB.1S.250.CLAC27 FGA.2B.306.CYCD92 FGA.2B.306.CYCD92Z FGA.XB.312.CLAD72 FGJ.1B.302.CYMD62 FGJ.3B.308.CLLD72Z