

www.lemo.com

# **HGG.1B.307.CLLP**

# **SUMMARY**

#### # Wires

Low voltage 7



Image is for illustrative purpose only

Series 1B

Termination type Female solder

IP rating 68

AWG wire size 30.00 - 22.00

Cable Ø 0.00 - 0.00 mm

**Status** active

Matching parts FGG.1B.307.CLAD42

### **Download**

Request a quote

Eplan Catalog

## **TECHNICAL DETAILS**

#### Mechanics

Shell Style/Model HG\*: Fixed receptacle, nut fixing, watertight or vacuum-tight

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Variant P: Watertight

**Weight** 13.64 g

#### **Performance**

Configuration 1B.307 : 7 Low Voltage Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 7 Amps

## **Specifications**

Contact Type: Solder

Contact Dia.: 0.7 mm (0.028in) Bucket Dia.: 0.8 mm (0.031in)

Max. Solid Conductor: 0.34 mm^2 (AWG 22) Max. Stranded Conductor: 0.34 mm^2 (AWG 22)

R (max): 6.1 mOhm

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Vtest (contact-shell): 1050 V (AC), 1490 V (DC) Vtest (contact-contact): 950 V (AC), 1340 V (DC)

### **Others**

Endurance (Shell): 5000


Temp (min / max):  $-20^{\circ}$ C /  $+100^{\circ}$ C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 20/80/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

Pressure: 60 bars

# **DRAWINGS**

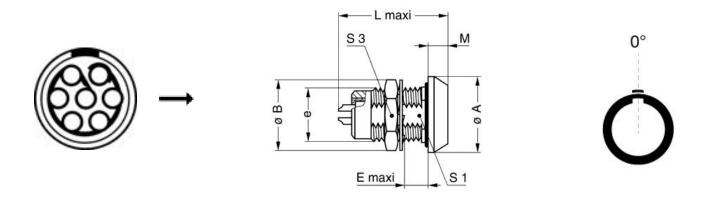

### **Dimensions**

	А	В	Е	L	М	S1	S3	e
mm.	18	16	7	26.6	4.5	10.5	14	M12x1.0
in.	0,71	0,63	0,28	1,05	0,18	0,41	0,55	

# **RECOMMENDED BY LEMO**

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## **Tools**

## **Cables**

CMN.07.T26.037QGZE	TPR (medical)	Grey	
CMN.07.T28.044PGZE		Grey	
CMN.07.T28.044PNZE			
270250	PVC	Grey	<b>&gt;</b>
70140	PVC	Grey	->-
7041	PVC	Grey	
7050	PVC	Black	<b>&gt;====</b>
717920	PVC	Grey	<b>&gt;</b> □ □€
CTR.75.030.121875G	PVC	Grey	<b>&gt;</b>

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 D38999/20ZG35PN-LC D38999/20ZJ24SA
D38999/20ZJ61PA-LC FAG.2B.319.CYC FGA.1B.307.CYCD72Z FLS.01.250.DLAE24 PFG.1B.308.CYZZ PKG.M0.6BL.LZ
PLC.M1.0SL.LA GMA.2B.045.DJ GMA.3B.090.DA PRG.M0.6GL.LC52GZ ABF.1S.250.NTA 1332M107MS EAJ.1B.306.CWA 15894302 ELF.00.250.NTL ERA.01.250.DLL BRD.0B.200.PCSG HVP.03.250.CLLPV CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500
EXG.0B.309.HLN FFB.1S.250.CLAC27 FLC.00.250.CTAC31 FPG.0B.305.CLAD52 PCS.01.250.DLLE31 PKC.M0.7GL.NG
PKG.M0.4TL.LZ PXG.M0.8GG.NG HEG.1B.307.CLNP BRR.3S.200.PZVG JDXEP2T19FSN 400374 DTA.99.700.5Z ECG.00.304.CLL
ECP.0S.304.CLN EEG.1B.306.CYZ MS3117-12BU EGA.00.303.CLL SAN.M13.GLA.6G 6408-201V-11343 6408-202V-25273
PAC.M0.4NL.AC52J 980-0009-471