

HGP.2E.306.CLLP

SUMMARY

Wires

Low voltage 6



Image is for illustrative purpose only

Series 2E

Termination type Female solder

IP rating 68

AWG wire size 28.00 - 20.00 Cable Ø 0.00 - 0.00 mm

Status active

Matching parts FFA.2E.306.CLAC25Z

Download

Request a quote

Eplan Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model HGP*: Fixed receptacle, nut fixing, watertight or vacuum-tight

Keying Hermaphroditic keying (half moon insert) with female pin 1

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Variant P: Watertight

Weight 39.25 g

Performance

Configuration 2E.306: 6 Low Voltage
Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 12 Amps

Specifications

Contact Type: Solder

Contact Dia.: 1.3 mm (0.051in) Bucket Dia.: 1 mm (0.039in)

Max. Solid Conductor: 0.5 mm² (AWG 20) Max. Stranded Conductor: 0.5 mm² (AWG 20)

R (max): 3.6 mOhm

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Vtest: 1500 V (AC), 2100 V (DC)

Others


Endurance (Shell): 5000 mating cycles Temp (min / max): -20°C / +80°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Climatical Category: 20/80/21 Shielding (min): 95 dB (10 MHz) Shielding (min): 80 dB (1 GHz) Salt Spray Corrosion: >1000 hr

Pressure: 40 bars

DRAWINGS

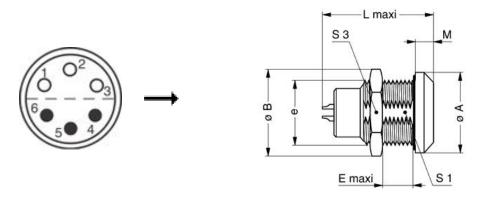



Dimensions

	А	В	E	L	М	S 1	S 3	е
mm.	25	27.5	10.5	32.5	5	18.5	24	M20x1.0
in.	0,98	1,08	0,41	1,28	0,20	0,73	0,94	

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Cables

CMN.06.T20.062PGZE		Grey	>
CMN.06.T20.062PNZE			>
CMN.06.T20.062QGZE	TPR (medical)	Grey	>
CMN.06.T26.037QGZE	TPR (medical)	Grey	>
CMN.06.T28.031PGCE	PVC	GREY	
CMN.06.T28.031PGZE		Grey	>
CMN.06.T28.031PNCE	PVC	Black	
CMN.06.T28.031PNZE			>
CMN.06.T28.042QBCE	TPR (medical)		
CMN.06.T28.044PGZE		Grey	>
CMN.06.T28.044PNZE			>
106220	PVC	Black	-
106240	PTFE	White	>
12080	PVC	Grey	
160140	PVC	Grey	
160240	PVC	Black	
160260	PVC	Black	
260250	PVC	Grey	>
360500	PVC	Grey	>
360750	PVC	Grey	>
60260	PTFE	White	>
6280	PVC	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 EZG.0B.309.CLN FFA.2S.310.ZLA FGA.1B.307.CYCD72Z FGJ.1B.304.CLLD76 FGJ.1B.306.CWLD72 FGJ.3B.304.CYMD10Z FGJ.3B.304.CYMD82Z FHG.1B.303.CYCZ PCS.01.250.DLLE24 PHG.0K.305.CYMC40Z PHG.1K.308.CLLK85 PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.10.290.DN GMA.3B.090.DA PRG.M0.6GL.LC52GZ PSA.1S.275.CTLC66 ABF.1S.250.NTA 133020F 1331ER193MZ 1332M107MZ DTS26Z19-32JA-LC DTS26Z19-32SA DTS26Z19-32SA-LC EAJ.1B.306.CWA ECG.XB.312.CLL 1589430-2 EEA.0B.305.CLN EEA.0B.309.CLL ELF.00.250.NTL ERA.01.250.DLL BRR.2S.200.PZVG HR10A-P CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 ESB.00.303.NLL EXG.0B.309.HLN FFB.1S.250.CLAC27 FGA.2B.306.CYCD92 FGA.2B.306.CYCD92Z FGJ.1B.302.CYMD62 FGJ.3B.308.CLLD72Z FHG.1B.303.CYCD62 FLC.00.250.CTAC31 PCS.01.250.DLLE31