

www.lemo.com

HVA.2W.310.CLLPV

SUMMARY

Wires

Low voltage 10



Image is for illustrative purpose only

Series 2W

Termination type Female solder

IP rating 68

AWG wire size 30.00 - 22.00

Cable Ø 0.00 - 0.00 mm

Status active

Matching parts FVA.2W.310.CLAC35

Download

Request a quote

Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model HV*: Fixed socket, nut fixing, vacuumtight

Keying 2 keys (alpha=30; Plug: male contacts; Receptacle: female contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Variant PV: Watertight / Vacuum-tested

Weight 28.95 g

Performance

Configuration 2W.310: 10 Low Voltage

Insulator

Rated Current 8 Amps

Specifications

Contact Type: Solder

Contact Dia.: 0.9 mm (0.035in) Bucket Dia.: 0.8 mm (0.031in)

Max. Solid Conductor: 0.34 mm² (AWG 22) Max. Stranded Conductor: 0.34 mm² (AWG 22)

R (max): 4.8 mOhm

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Vtest (contact-contact): 1450 V (AC) 2100 V (DC) Vtest (contact-shell): 1300 V (AC) 1800 V (DC)

Others

Endurance (Shell): 1000 mating cycles Temp (min / max): -20°C / +80°C

Humidity (max): <=95% [at 60 deg C /140 F]


Climatical Category: 20/200/21 Shielding (min): 95 dB (10 MHz) Shielding (min): 80 dB (1 GHz)

R leak (He) (max): 0.0000001 mbar*l/s (if vacuum-tested)

Salt Spray Corrosion: >1000 hr

Pressure: 40 bars

DRAWINGS

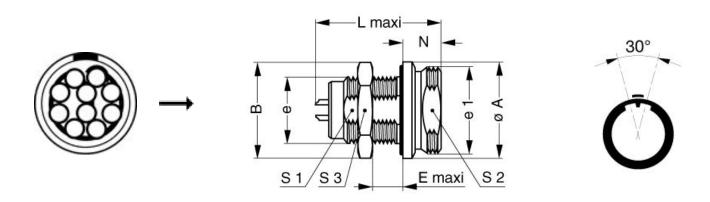

Dimensions

	А	В	Е	L	N	S 1	S2	S 3	е	e1
mm.	22.5	21.8	12	35.8	9	14.5	18.5	19	M16x1.0	M20x1.0
in.	0,89	0,86	0,47	1,41	0,35	0,57	0,73	0,75		

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Cables

		_	
CMN.10.T22.068QGZE	TPR (medical)	Grey	
CMN.10.T28.052PGZE		Grey	
CMN.10.T28.052PNZE			
CMN.10.T28.053QGZE	TPR (medical)	Grey	
110220	PVC	Black	
110240	PTFE	White	>
110260	PTFE	White	>
110280	PVC	Black	
210140	PVC	Grey	
210240	PVC	Black	
210250	PVC	Grey	
210260	PVC	Black	-

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 EZG.0B.309.CLN FFA.2S.310.ZLA FGA.1B.307.CYCD72Z FGJ.1B.304.CLLD76 FGJ.1B.306.CWLD72 FGJ.3B.304.CYMD10Z FGJ.3B.304.CYMD82Z PCS.01.250.DLLE24 PHG.0K.305.CYMC40Z PHG.1K.308.CLLK85 PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.10.290.DN GMA.3B.090.DA PRG.M0.6GL.LC52GZ PSA.1S.275.CTLC66 ABF.1S.250.NTA 133020F 1331ER193MZ 1332M107MZ DTS26Z19-32JA-LC DTS26Z19-32SA DTS26Z19-32SA-LC DTS26Z23-55HA DTS26Z23-55HA-LC DTS26Z23-55JA-LC EAJ.1B.306.CWA ECG.XB.312.CLL 1589430-2 EEA.0B.305.CLN EEA.0B.309.CLL ELF.00.250.NTL ERA.01.250.DLL BRR.2S.200.PZVG HR10A-P CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 ESB.00.303.NLL EXG.0B.309.HLN FFB.1S.250.CLAC27 FGA.2B.306.CYCD92 FGA.2B.306.CYCD92Z FGA.XB.312.CLAD72 FGJ.1B.302.CYMD62 FGJ.3B.308.CLLD72Z