



SUMMARY

Wires

Low voltage 12



Image is for illustrative purpose only

Series 2F

Termination type Female crimp

IP rating 67

AWG wire size 26.00 - 22.00 Cable Ø 5.30 - 14.00 mm

Status active

Matching parts FGN.2F.312.XLC

Download

Request a quote

Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model PE*: Straight receptacle, nut fixing (back panel mounting)

Keying 3 keys (beta=165, gamma=30, plug: male contacts, receptacle: female contacts)

Housing Material

Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces

bronze/brass

Weight 11.85 g

Performance

Configuration 2F.312: 12 Low Voltage Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 7 Amps

Specifications

Contact Type: Crimp Contact Retention: 22 N Contact Dia.: 0.7 mm (0.028in) Bucket Dia.: 0.8 mm (0.031in)

Min. Conductor: 0.14 mm^2 (AWG 26) Max. Conductor: 0.34 mm^2 (AWG 22)

R (max): 6.1 mOhm

Vtest (contact-shell): 2000 V (AC), 2850 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Vtest (contact-contact): 1650 V (AC), 2350 V (DC)

Others

Endurance (Shell): 1000 mating cycles Temp (min / max): -15°C / +200°C


Humidity (max): $\leq 95\%$ [at 60 deg C /140 F]


Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms]

Climatical Category: 15/200/21 (Aluminium shell)

Salt Spray Corrosion: max. 48 hr

DRAWINGS

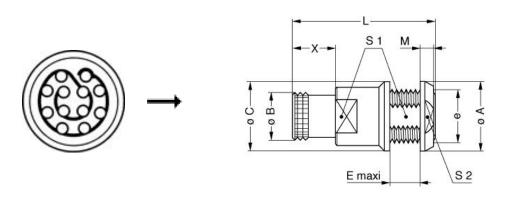



Dimensions

	A	В	С	E	L	М	S 1	S2	X	e
mm.	20	14	20	6.4	26.7	4	14.5	17	8	M16x1.0
in.	0,79	0,55	0,79	0,25	1,05	0,16	0,57	0,67	0,31	

RECOMMENDED BY LEMO

Tools

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 22-24-26/6-5-5

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Positionner: DCE.91.070.BVM
Extractor: DCF.93.070.4LT
Replacement contact: EGG.0B.655.ZZM

Cables

CMN.12.T22.070QGZE	TPR (medical)	Grey	
CMN.12.T28.054PGZE		Grey	
CMN.12.T28.054PNZE			
112240	PTFE	White	> ::
112260	PTFE	White	> ::
112280	PVC	Black	-
124080	PVC	Grey	
124084	PVC	Black	
212220	PVC	Black	
212240	PVC	Black	
212250	PVC	Grey	
212260	PVC	Black	-

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard Circular Connector category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

5M2530B10P 600259N006 600273N007 6134-336-13149 6134-337-11149 6134-337-2390 6134-341-17149 6280-4SG-516 6280-7SG-3DC 6290 6291A 66200A-10 680-SMG 681-PMG CXS3102A14S2P CXS3102A181S 7271-6SG-300 7282-3PG-300-CH3 75-474014-05S 75-474618-01S 75-474618-04P 75-474618-04S 799539-000 MI8-SE 805-005-07NF11-19PC 805-005-07NF15-7PA 8280-4PG-516 8280-7PG-519 8282-5PG-519 836783-1 MP-4102-25P-C 862256-1 864019-2 866857-1 867865-1 PT01SP-14-18P PT08P-14-5S 120-1833-000 QCM019PC2DC012B 1-2069279-1 121583-0217 121667-0020 129591AU 1000B BULK RD10A16-19-P6CS051/1 RD10A20-31-P8CS051/1 RD16A14-12-S6CS051/2 1301240290 1301240347 1301860202 1301240268